

# لیست قیمت هایک ویژن تابستان ۱۴۰۴



**تارتن دژ آریانا**

نمایندگی مرکزی محصولات هایک ویژن

**۰۲۱ - ۵۲۶۰۵**

جهت دریافت قیمت همکاری محصولات تماس بگیرید



|                            | 1                                                                                 | 2                                                                                 | 3                                                                                  | 4                                                                                   | 5                                                                                   | 6                                                                                   |
|----------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
| Part Number                | DS-2CD1021G0-I                                                                    | DS-2CD1043G2-LIU                                                                  | DS-2CD2023G2-I                                                                     | DS-2CD2025FHWD-I                                                                    | DS-2CD1047G2H-LIUF/S                                                                | DS-2CD2043G2-LI                                                                     |
|                            |  |  |  |  |  |  |
| Price (Rials)              | 25,080,000                                                                        | 58,540,000                                                                        | 66,600,000                                                                         | 103,070,000                                                                         | 96,600,000                                                                          | 105,310,000                                                                         |
| Camera Type                | Bullet                                                                            | Bullet                                                                            | Bullet                                                                             | Bullet                                                                              | Bullet                                                                              | Bullet                                                                              |
| Resolution                 | 2MP (1920x1080)                                                                   | 4MP (2560x1440)                                                                   | 2MP (1920x1080)                                                                    | 2MP (1920x1080)                                                                     | 4MP (2688x1520)                                                                     | 4MP (2688x1520)                                                                     |
| Lens                       | 2.8 mm Fixed                                                                      | 2.8 mm Fixed                                                                      | 2.8 mm Fixed                                                                       | 4 mm Fixed                                                                          | 2.8 mm Fixed                                                                        | 2.8 mm Fixed                                                                        |
| IR Range                   | Up to 20m                                                                         | 30m (IR & Color)                                                                  | Up to 40m                                                                          | Up to 30m                                                                           | 30m (IR & Color)                                                                    | 40m (IR & Color)                                                                    |
| SD Card                    | No                                                                                | No                                                                                | Yes (Up to 512 G)                                                                  | Yes (Up to 128 G)                                                                   | Yes (Up to 512 G)                                                                   | Yes (Up to 512 G)                                                                   |
| Microphone                 | No                                                                                | Yes (Built in MIC)                                                                | No                                                                                 | No                                                                                  | Yes (Built in MIC)                                                                  | No                                                                                  |
| WDR                        | DWDR                                                                              | Yes (120db)                                                                       | Yes (120db)                                                                        | Yes (120db)                                                                         | Yes (120db)                                                                         | Yes (120db)                                                                         |
| Other Features             | Motion detection, video tampering, exception                                      | Motion 2.0 (human & vehicle), Line crossing, Intrusion detection                  | Motion 2.0 (human & vehicle), Line crossing, Intrusion detection                   | Line crossing, Intrusion, object removal & face detection                           | Motion 2.0 (human & vehicle), Line crossing, Intrusion detection                    | Motion 2.0 (human & vehicle), Line crossing, Intrusion detection                    |
| Click for More information | <a href="#">توضیحات محصول</a>                                                     | <a href="#">توضیحات محصول</a>                                                     | <a href="#">توضیحات محصول</a>                                                      | <a href="#">توضیحات محصول</a>                                                       | <a href="#">توضیحات محصول</a>                                                       | <a href="#">توضیحات محصول</a>                                                       |

 تهران- خیابان سهروردی- بالاتر از خیابان هویزه کوچه سرمد پلاک 1  
 ۰۲۱-۵۲۶۰۵



Part Number

DS-2CD2046G2-I

DS-2CD2085G1-I

DS-2CD2086G2-I

DS-2CD2087G2H-LIU

DS-2CD1T43G2-LIU

DS-2CD2T47G2-L



Price (Rials)

113,120,000

133,010,000

151,080,000

156,840,000

71,970,000

149,050,000

Camera Type

Bullet

Bullet

Bullet

Bullet

Bullet

Bullet

Resolution

4MP (2688×1520)

8MP (3840 × 2160)

8MP (3840 × 2160)

8MP (3840 × 2160)

4MP (2688×1520)

4MP (2688×1520)

Lens

2.8 mm Fixed

2.8/4 mm Fixed

2.8 mm Fixed

2.8 mm Fixed

4 mm Fixed

4 mm Fixed

IR Range

Up to 40m

Up to 30m

Up to 40m

40m (IR &amp; Color)

Up to 50m (Color)

60m (Color Vu)

SD Card

Yes (Up to 512 G)

Yes (Up to 128 G)

Yes (Up to 256 G)

Yes (Up to 512G)

Yes (Up to 512G)

Yes (Up to 512G)

Microphone

No

No

No

Yes (Built in MIC)

Yes (Built in MIC)

No

WDR

Yes (120db)

Yes (120db)

Yes (120db)

Yes (130db)

Yes (120db)

Yes (130db)

Other Features

Face Capture, Motion 2.0 (human &amp; vehicle), Line crossing, Intrusion detection

Motion detection, Line crossing, Intrusion, object removal &amp; face detection

Motion 2.0 (human &amp; vehicle), Line crossing, Intrusion detection

Motion 2.0 (human &amp; vehicle), Line crossing, Intrusion detection

Motion 2.0 (human &amp; vehicle), Line crossing, Intrusion detection, Face detection

Face Capture, Motion 2.0 (human &amp; vehicle), Line crossing, Intrusion detection

Click for More information

توضیحات محصول

توضیحات محصول

توضیحات محصول

توضیحات محصول

توضیحات محصول

توضیحات محصول



تهران- خیابان سهروردی- بالاتر از خیابان هویزه کوچه سرمد پلاک ۱



۰۲۱-۵۲۶۰۵





13

14

15

16

17

18

Part Number

DS-2CD2T47G2-L

DS-2CD2T43G2-4LI2U

DS-2CD2T46G2-4I

DS-2CD2T63G2-4LI2U

DS-2CD2646G2-IZS

DS-2CD2686G2-IZS



Price (Rials)

139,690,000

112,230,000

119,060,000

120,670,000

205,410,000

281,450,000

Camera Type

Bullet

Bullet

Bullet

Bullet

Bullet

Bullet

Resolution

4MP (2688×1520)

4MP (2688×1520)

4MP (2688×1520)

6MP (3200×1800)

4MP (2688 × 1520)

8MP (3840 × 2160)

Lens

2.8 mm Fixed

2.8 mm Fixed

2.8 mm Fixed

2.8 mm Fixed

2.8-12mm Motorized

2.8-12mm Motorized

IR Range

60m (Color Vu)

Up to 80m (Color)

Up to 80m

Up to 80m (Color)

Up to 60m

Up to 50m

SD Card

Yes (Up to 512G)

Yes (Up to 512G)

Yes (Up to 512G)

Yes (Up to 512G)

Yes (Up to 512G)

Yes (Up to 256G)

Microphone

No

Yes (2 MIC)

No

Yes (2 MIC)

Yes (1.ch Audio Input)

Yes (1.ch Audio Input)

WDR

Yes (130db)

Yes (120db)

Yes (120db)

Yes (120db)

Yes (120db)

Yes (120db)

Other Features

Face Capture, Motion 2.0 (human &amp; vehicle), Line crossing, Intrusion detection

Motion 2.0 (human &amp; vehicle), Line crossing, Intrusion detection

Face Capture, Motion 2.0 (human &amp; vehicle), Line crossing, Intrusion detection

Motion 2.0 (human &amp; vehicle), Line crossing, Intrusion detection

Face Capture, Motion 2.0 (human &amp; vehicle), Line crossing, Intrusion detection, DarkFighter

Face Capture, Motion 2.0 (human &amp; vehicle), Line crossing, Intrusion detection, DarkFighter

Click for More information

توضیحات محصول

توضیحات محصول

توضیحات محصول

توضیحات محصول

توضیحات محصول

توضیحات محصول



تهران- خیابان سهروردی- بالاتر از خیابان هویزه کوچه سرمد پلاک ۱



۰۲۱-۵۲۶۰۵





تارتن دژ آریانا  
CCTV AND SECURITY SYSTEMS

19

20

21

22

23

24

Part Number

DS-2CD2687G2HT-LIZS

DS-2CD1121G0-I

DS-2CD1123G2-LIU

DS-2CD1143G2-LIU

DS-2CD2123G2-IU

DS-2CD2126G2-ISU



Price (Rials)

280,570,000

25,080,000

38,680,000

57,590,000

72,570,000

94,220,000

Camera Type

Bullet

Dome

Dome

Dome

Dome

Dome

Resolution

8MP (3840 × 2160)

2MP (1920x1080)

2MP (1920x1080)

4MP (2560×1440)

2MP (1920x1080)

2MP (1920x1080)

Lens

2.8-12mm Motorized

2.8 mm Fixed

2.8 mm Fixed

2.8 mm Fixed

2.8 mm Fixed

2.8 mm Fixed

IR Range

Up to 60m

Up to 20m

30m (IR & Color)

30m (IR & Color)

Up to 30m

Up to 30m

SD Card

Yes (Up to 512G)

No

No

No

Yes (Up to 256G)

Yes (Up to 256G)

Microphone

Yes (1.ch Audio Input)

No

Yes (Built in MIC)

Yes (Built in MIC)

Yes (Built in MIC)

Yes (Built in MIC & 1.ch)

WDR

Yes (120db)

DWDR

DWDR

Yes (120db)

Yes (120db)

Yes (120db)

Other Features

Face Capture, Motion 2.0  
(human & vehicle), Line crossing,  
Intrusion detection,  
DarkFighter

Motion detection,  
video tampering,  
exception

Motion 2.0 (human & vehicle), Line crossing,  
Intrusion detection

Motion 2.0 (human & vehicle), Line crossing,  
Intrusion detection

Motion 2.0 (human & vehicle), Line crossing,  
Intrusion detection

Motion 2.0 (human & vehicle), Line crossing,  
Intrusion detection

Click for More  
information

توضیحات محصول

توضیحات محصول

توضیحات محصول

توضیحات محصول

توضیحات محصول

توضیحات محصول



تهران- خیابان سهروردی- بالاتر از خیابان هویزه کوچه سرمد پلاک ۱



۰۲۱-۵۲۶۰۵



تارتن دژ آریانا  
CCTV AND SECURITY SYSTEMS



تارتن دژ آریانا  
CCTV AND SECURITY SYSTEMS

25

26

27

28

29

30

Part Number

DS-2CD2143G2-LIS2U

DS-2CD3143G2-IU

DS-2CD2163G2-IU

DS-2CD2183G2-IU

DS-2CD2185FWD-I

DS-2CD2H25FWD-IZS



Price (Rials)

109,640,000

107,470,000

101,320,000

120,630,000

137,100,000

191,300,000

Camera Type

Dome

Dome

Dome

Dome

Dome

Dome

Resolution

4MP (2688 × 1520)

4MP (2688 × 1520)

6MP (3200 × 1800)

8MP (3840 × 2160)

8MP (3840 × 2160)

2MP (1920x1080)

Lens

2.8 mm Fixed

2.8 /4mm Fixed

2.8 mm Fixed

2.8 mm Fixed

2.8/4 mm Fixed

2.8-12mm Motorized

IR Range

30m (IR & Color)

Up to 40m

Up to 30m

Up to 30m

Up to 30m

Up to 30m

SD Card

Yes (Up to 512G)

Yes (Up to 512G)

Yes (Up to 256G)

Yes (Up to 256G)

Yes (Up to 128G)

Yes (Up to 128 G)

Microphone

Yes (2 MIC & 1.ch)

Yes (Built in MIC)

Yes (Built in MIC)

Yes (Built in MIC)

No

Yes (1.ch Audio Input)

WDR

Yes (120db)

Yes (120db)

Yes (120db)

Yes (120db)

Yes (120db)

Yes (120db)

Other Features

Motion 2.0 (human & vehicle), Line crossing, Intrusion detection

Face Capture, Motion 2.0 (human & vehicle), Line crossing, Intrusion detection

Motion 2.0 (human & vehicle), Line crossing, Intrusion detection, Face Detection

Motion 2.0 (human & vehicle), Line crossing, Intrusion detection

Motion 2.0 (human & vehicle), Line crossing, Intrusion detection, face detection

Motion 2.0 (human & vehicle), Line crossing, Intrusion detection, Face Detection

Click for More information

توضیحات محصول

توضیحات محصول

توضیحات محصول

توضیحات محصول

توضیحات محصول

توضیحات محصول



تهران- خیابان سهروردی- بالاتر از خیابان هویزه کوچه سرمد پلاک ۱



۰۲۱-۵۲۶۰۵



تارتن دژ آریانا  
CCTV AND SECURITY SYSTEMS

Part Number

DS-2CD2327G2-L

DS-2CD2347G2-L

DS-2CD2787G2HT-LIZS

DS-2CD2443G0-IW



Price (Rials)

93,710,000

134,070,000

289,720,000

107,090,000

Camera Type

Dome

Dome

Dome

Cube

Resolution

2MP (1920x1080)

4MP (2688 × 1520)

8MP (3840 × 2160)

4MP (2688x1520)

Lens

2.8 mm Fixed

2.8 mm Fixed

2.8-12mm Varifocal

2.8/4 mm Fixed

IR Range

30m (ColorVu)

30m (Color Vu)

40m (IR &amp; Color)

Up to 10m

SD Card

Yes (Up to 512G)

Yes (Up to 256G)

Yes (Up to 512G)

Yes (Up to 128G)

Microphone

No

No

Yes (1.ch Audio Input)

Yes (Built in MIC)

WDR

Yes (120db)

Yes (130db)

Yes (130db)

Yes (120db)

Other Features

Face Capture, Motion 2.0 (human &amp; vehicle), Line crossing, Intrusion detection

Face Capture, Motion 2.0 (human &amp; vehicle), Line crossing, Intrusion detection

Face Detection, Motion 2.0 (human &amp; vehicle), Line crossing, Intrusion detection

Motion detection, video tampering, exception, face detection

Click for More information

توضیحات محصول

توضیحات محصول

توضیحات محصول

توضیحات محصول



تهران- خیابان سهروردی- بالاتر از خیابان هویزه کوچه سرمد پلاک ۱



۰۲۱-۵۲۶۰۵



|             | 35                   | 36                   | 37                 | 38                 | 39               | 40                    |
|-------------|----------------------|----------------------|--------------------|--------------------|------------------|-----------------------|
| Part Number | DS-2DE7A232IW-AEB T5 | DS-2DE7A432IW-AEB T5 | DS-2DE4225IW-DE T5 | DS-2DE4425IW-DE T5 | DS-2SE4C225MWG-E | DS-2SE4C425MWG-E(14f0 |



| Price (Rials)              | 582,540,000                                                                                              | 643,850,000                                                                                              | 314,640,000                                                                               | 358,710,000                                                                               | 499,470,000                                                                               | 552,860,000                                                                               |
|----------------------------|----------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------|
| Camera Type                | PTZ                                                                                                      | PTZ                                                                                                      | PTZ                                                                                       | PTZ                                                                                       | PTZ                                                                                       | PTZ                                                                                       |
| Resolution                 | 2MP (1920x1080)                                                                                          | 4MP (2560x1440)                                                                                          | 2MP (1920x1080)                                                                           | 4MP (2560 × 1440)                                                                         | 2MP (1920x1080)                                                                           | 4MP (2560x1440)                                                                           |
| Lens                       | 4.8-153mm Varifocal                                                                                      | 5.9-188mm Varifocal                                                                                      | 4.8-120mm Motorized                                                                       | 4.8-120mm Motorized                                                                       | 2.8mm (Bullet)<br>4.8-120mm Motorized                                                     | 2.8mm (Bullet)<br>4.8-120mm Motorized                                                     |
| IR Range                   | Up to 200m                                                                                               | Up to 200m                                                                                               | Up to 100m                                                                                | Up to 100m                                                                                | 30m (Color)/ 100m (IR)                                                                    | Up to 30m/Up to 100m                                                                      |
| SD Card                    | Yes (Up to 256G)                                                                                         | Yes (Up to 256G)                                                                                         | Yes (Up to 256G)                                                                          | Yes (Up to 256G)                                                                          | Yes (Up to 256G)                                                                          | Yes (Up to 256G)                                                                          |
| Microphone                 | Yes (1.ch Audio Input)                                                                                   | Yes (1.ch Audio Input)                                                                                   | No                                                                                        | No                                                                                        | Yes (1.ch Audio Input)                                                                    | Yes (1.ch Audio Input)                                                                    |
| WDR                        | Yes (120db)                                                                                              | Yes (120db)                                                                                              | Yes (120db)                                                                               | Yes (120db)                                                                               | Yes (120db)                                                                               | Yes (120db)                                                                               |
| Other Features             | Face Capture, Motion 2.0 (human&vehicle), Line crossing, Intrusion detection, DarkFighter, auto-tracking | Face Capture, Motion 2.0 (human&vehicle), Line crossing, Intrusion detection, DarkFighter, auto-tracking | Face Capture, Motion 2.0 (human&vehicle), Line crossing, Intrusion detection, DarkFighter | Face Capture, Motion 2.0 (human&vehicle), Line crossing, Intrusion detection, DarkFighter | Face Capture, Motion 2.0 (human&vehicle), Line crossing, Intrusion detection, DarkFighter | Face Capture, Motion 2.0 (human&vehicle), Line crossing, Intrusion detection, DarkFighter |
| Click for More information | <a href="#">توضیحات محصول</a>                                                                            | <a href="#">توضیحات محصول</a>                                                                            | <a href="#">توضیحات محصول</a>                                                             | <a href="#">توضیحات محصول</a>                                                             | <a href="#">توضیحات محصول</a>                                                             | <a href="#">توضیحات محصول</a>                                                             |

تهران- خیابان سهروردی- بالاتر از خیابان هویزه کوچه سرمد پلاک ۱  
 ۰۲۱-۵۲۶۰۵



41

42

Part Number

DS-2DE5232W-AE(T5)

DS-2DE5432IWG-E



Price (Rials)

525,980,000

566,790,000

Camera Type

PTZ

PTZ

Resolution

2MP (1920x1080)

4MP (2560x1440)

Lens

4.8-153.6mm

5.9-188.8mm

IR Range

Up to 100m

Up to 150m

SD Card

Yes (Up to 256G)

Yes (Up to 256G)

Microphone

Yes (1.ch Audio Input)

Yes (1.ch Audio Input)

WDR

Yes (120db)

Yes (120db)

Other Features

Face Capture, Motion 2.0 (human&amp;vehicle), Line crossing, Intrusion detection, DarkFighter

Face Capture, Motion 2.0 (human&amp;vehicle), Line crossing, Intrusion detection, DarkFighter

Click for More information

توضیحات محصول

توضیحات محصول

تهران- خیابان سهروردی- بالاتر از خیابان هوپزه کوچه سرمد پلاک ۱  
 ۰۲۱-۵۲۶۰۵



Part Number

DS-7616NXI-K2

DS-7732NXI-K4

DS-7732NI-K4/16P

DS-9632NXI-I8/S

DS-9632NI-M16



Price (Rials)

135,030,000

295,790,000

450,910,000

973,470,000

1,337,370,000

NVR Type

16 Ch

32 Ch

32 Ch / 16 POE

32 Ch

32 Ch

Input BandWidth

160Mbps

256Mbps

256Mbps

320Mbps

320Mbps

Output Bandwidth

160Mbps

160Mbps

160Mbps

256Mbps

400Mbps

Audio Input/Output

1Ch. In/ 1Ch. Out

1Ch. In/ 1Ch. Out

1Ch. In/ 1Ch. Out

1Ch. In/ 2Ch. Out

1Ch. In/ 2Ch. Out

Decoding Capacity

Upto 12Mp

Upto 12Mp

Upto 8Mp

Upto 32Mp

Upto 32Mp

Video Output

1 Port HDMI : 4K  
1 Port VGA : 1080P1 Port HDMI : 4K  
1 Port VGA : 1080P1 Port HDMI : 4K  
1 Port VGA : 1080P2 Port HDMI :4K  
2 Port VGA : 1080P2 Port HDMI : 8K/4K  
2 Port VGA : 1080P

SATA Interface

2 HDD up to 10TB

4 HDD up to 10TB

4 HDD up to 10TB

8 HDD up to 14TB

16 HDD up to 16TB

Network Interface

1 RJ45 1000M

2 RJ45 1000M

1 RJ45 1000M

2 RJ45 1000M

2 RJ45 1000M

Other Features

AcuSense (Facial  
recognition, perimeter  
protection, motion  
detection 2.0) Alarm I/O  
4/1AcuSense (Facial  
recognition, perimeter  
protection, motion  
detection 2.0) Alarm I/O  
16/4Support special camera  
smart functions(Motion  
Detection, Line crossing,  
Intrusion..), Alarm I/O  
16/4AcuSense (Facial  
recognition, perimeter  
protection, motion  
detection 2.0) Alarm I/O  
16/8, RAIDSupports special  
cameras(people  
counting camera,  
ANPR & fisheye), Alarm  
I/O 16/9, RAIDClick for More  
information

توضیحات محصول

توضیحات محصول

توضیحات محصول

توضیحات محصول

توضیحات محصول

# لیست قیمت هایک ویژن تابستان ۱۴۰۴



**تارتین دژ آریانا**

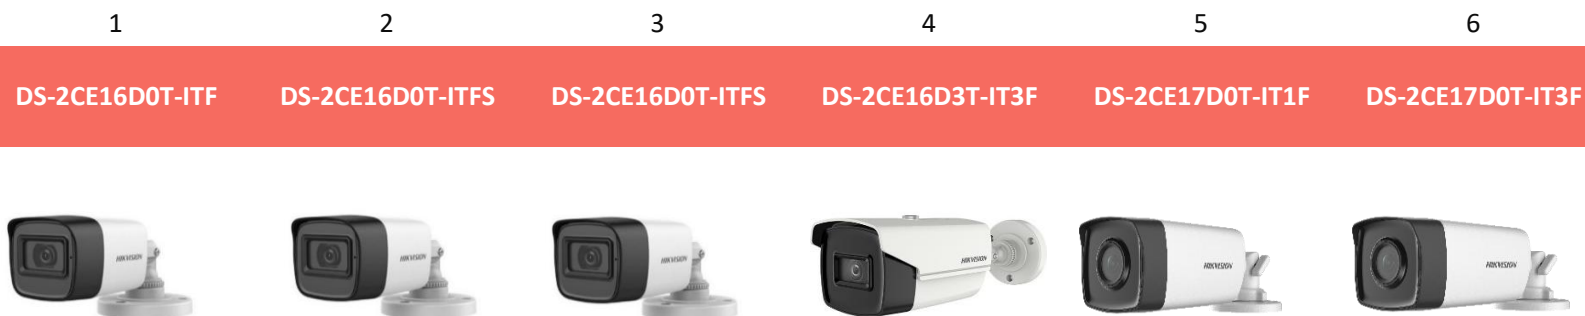
نمایندگی مرکزی محصولات هایک ویژن

**۰۲۱ - ۵۲۶۰۵**

جهت دریافت قیمت همکاری محصولات تماس بگیرید



تارتن دژ آریانا  
CCTV AND SECURITY SYSTEMS



| Part Number                   | DS-2CE16D0T-ITF                                | DS-2CE16D0T-ITFS                                       | DS-2CE16D0T-ITFS                                       | DS-2CE16D3T-IT3F               | DS-2CE17D0T-IT1F              | DS-2CE17D0T-IT3F              |
|-------------------------------|------------------------------------------------|--------------------------------------------------------|--------------------------------------------------------|--------------------------------|-------------------------------|-------------------------------|
| Price (Rials)                 | 22,630,000                                     | 28,090,000                                             | 27,750,000                                             | 38,540,000                     | 23,770,000                    | 30,510,000                    |
| Camera Type                   | Bullet                                         | Bullet                                                 | Bullet                                                 | Bullet                         | Bullet                        | Bullet                        |
| Resolution                    | 2 Megapixel                                    | 2 Megapixel                                            | 2 Megapixel                                            | 2 Megapixel                    | 2 Megapixel                   | 2 Megapixel                   |
| Signal System                 | HDTVI,AHD,<br>HDCVI,ANLOG                      | HDTVI,AHD,<br>HDCVI,ANLOG                              | HDTVI,AHD,<br>HDCVI,ANLOG                              | HDTVI,AHD,<br>HDCVI,ANLOG      | HDTVI,AHD,<br>HDCVI,ANLOG     | HDTVI,AHD,<br>HDCVI,ANLOG     |
| Lens                          | 3.6mm Fixed                                    | 2.8mm Fixed                                            | 3.6mm Fixed                                            | 2.8mm Fixed                    | 2.8/3.6mm Fixed               | 2.8mm Fixed                   |
| Viewing Angle                 | 79.6°                                          | 106.4°                                                 | 79.6°                                                  | 106°                           | 101°/79.6°                    | 106.4°                        |
| IR Range                      | Up to 30m (Exir)                               | Up to 30m (Exir)                                       | Up to 30m (Exir)                                       | Up to 50m (Exir)               | Up to 30m                     | Up to 40m                     |
| IP Standard                   | IP67                                           | IP67                                                   | IP67                                                   | IP67                           | IP67                          | IP67                          |
| WDR                           | DWDR                                           | DWDR                                                   | DWDR                                                   | Yes (120db)                    | DWDR                          | DWDR                          |
| Other Features                | Smart IR, HLC, DNR,<br>BLC, 2D DNR, Switchable | HLC,2D DNR, BLC,<br>Switchable, Built-in<br>microphone | HLC,2D DNR, BLC,<br>Switchable, Built-in<br>microphone | 3D DNR,HLC, BLC,<br>Switchable | HLC, BLC, AGC,<br>Switchable  | HLC, BLC, AGC,<br>Switchable  |
| Click for More<br>information | <a href="#">توضیحات محصول</a>                  | <a href="#">توضیحات محصول</a>                          | <a href="#">توضیحات محصول</a>                          | <a href="#">توضیحات محصول</a>  | <a href="#">توضیحات محصول</a> | <a href="#">توضیحات محصول</a> |

تهران- خیابان سهروردی- بالاتر از خیابان هویزه کوچه سرمد پلاک 1  
۰۲۱-۵۲۶۰۵



تارتن دژ آریانا  
CCTV AND SECURITY SYSTEMS

|                            | 7                                                                                 | 8                                                                                 | 9                                                                                  | 10                                                                                  | 11                                                                                  | 12                                                                                  |
|----------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
| Part Number                | DS-2CE10DF0T-F                                                                    | DS-2CE10DF3T-FS                                                                   | DS-2CE12DF3T-F                                                                     | DS-2CE12DF3T-FS                                                                     | DS-2CE17H0T-IT3F                                                                    | DS-2CE17H0T-IT3FS                                                                   |
|                            |  |  |  |  |  |  |
| Price (Rials)              | 55,680,000                                                                        | 43,460,000                                                                        | 42,410,000                                                                         | 48,680,000                                                                          | 41,760,000                                                                          | 51,620,000                                                                          |
| Camera Type                | Bullet                                                                            | Bullet                                                                            | Bullet                                                                             | Bullet                                                                              | Bullet                                                                              | Bullet                                                                              |
| Resolution                 | 2 Megapixel                                                                       | 2 Megapixel                                                                       | 2 Megapixel                                                                        | 2 Megapixel                                                                         | 5MP (2560*1944)                                                                     | 5MP (2560*1944)                                                                     |
| Signal System              | HDTVI,AHD,<br>HDCVI,ANLOG                                                         | HDTVI,AHD,<br>HDCVI,ANLOG                                                         | HDTVI,AHD,<br>HDCVI,ANLOG                                                          | HDTVI,AHD,<br>HDCVI,ANLOG                                                           | HDTVI,AHD,<br>HDCVI,ANLOG                                                           | HDTVI,AHD,<br>HDCVI,ANLOG                                                           |
| Lens                       | 2.8/3.6mm Fixed                                                                   | 2.8mm Fixed                                                                       | 3.6mm Fixed                                                                        | 2.8mm Fixed                                                                         | 3.6mm Fixed                                                                         | 2.8mm Fixed                                                                         |
| Viewing Angle              | 98°/76°                                                                           | 98°                                                                               | 83°                                                                                | 98°                                                                                 | 80°                                                                                 | 85°                                                                                 |
| IR Range                   | Up to 20m (ColorVu)                                                               | Up to 20m (ColorVu)                                                               | Up to 40m (ColorVu)                                                                | Up to 40m (ColorVu)                                                                 | Up to 40m                                                                           | Up to 40m                                                                           |
| IP Standard                | IP67                                                                              | IP67                                                                              | IP67                                                                               | IP67                                                                                | IP67                                                                                | IP67                                                                                |
| WDR                        | DWDR                                                                              | Yes (130db)                                                                       | Yes (130db)                                                                        | Yes (130db)                                                                         | DWDR                                                                                | DWDR                                                                                |
| Other Features             | HLC, BLC, AGC,<br>Switchable                                                      | HLC, BLC, Smart IR,<br>Switchable, 3D DNR,<br>Built in mic                        | HLC, BLC, Smart IR,<br>Switchable, 3D DNR                                          | HLC, BLC, Smart IR,<br>Switchable, 3D DNR,<br>Built in mic                          | Smart IR, 2D DNR,<br>HLC,BLC, Switchable                                            | Smart IR, 2D DNR,<br>HLC,BLC, Switchable,<br>Built in mic                           |
| Click for More information | <a href="#">توضیحات محصول</a>                                                     | <a href="#">توضیحات محصول</a>                                                     | <a href="#">توضیحات محصول</a>                                                      | <a href="#">توضیحات محصول</a>                                                       | <a href="#">توضیحات محصول</a>                                                       | <a href="#">توضیحات محصول</a>                                                       |

|                            | 13                                                                                | 14                                                                                | 15                                                                                 | 16                                                                                  | 17                                                                                  | 18                                                                                  |
|----------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
| Part Number                | DS-2CE76D0T-LMFS                                                                  | DS-2CE76D0T-ITMFS                                                                 | DS-2CE76D3T-ITMF                                                                   | DS-2CE56D0T-VFIR3F                                                                  | DS-2CE70DF3T-PF                                                                     | DS-2CE72DF3T-F                                                                      |
|                            |  |  |  |  |  |  |
| Price (Rials)              | 24,400,000                                                                        | 29,990,000                                                                        | 38,020,000                                                                         | 55,870,000                                                                          | 37,400,000                                                                          | 44,040,000                                                                          |
| Camera Type                | Dome                                                                              | Dome                                                                              | Dome                                                                               | Dome                                                                                | Dome                                                                                | Dome                                                                                |
| Resolution                 | 2 Megapixel                                                                       | 2 Megapixel                                                                       | 2 Megapixel                                                                        | 2 Megapixel                                                                         | 2 Megapixel                                                                         | 2 Megapixel                                                                         |
| Signal System              | HDTVI,AHD,<br>HDCVI,ANLOG                                                         | HDTVI,AHD,<br>HDCVI,ANLOG                                                         | HDTVI,AHD,<br>HDCVI,ANLOG                                                          | HDTVI,AHD,<br>HDCVI,ANLOG                                                           | HDTVI,AHD,<br>HDCVI,ANLOG                                                           | HDTVI,AHD,<br>HDCVI,ANLOG                                                           |
| Lens                       | 2.8/3.6mm Fixed                                                                   | 2.8mm Fixed                                                                       | 2.8mm Fixed                                                                        | 2.8 - 12mm VariFocal                                                                | 3.6mm Fixed                                                                         | 3.6mm Fixed                                                                         |
| Viewing Angle              | 101°/78°                                                                          | 106.4°                                                                            | 106°                                                                               | 105°- 32°                                                                           | 77°                                                                                 | 77°                                                                                 |
| IR Range                   | 30m (IR & Color)                                                                  | Up to 30m (Exir)                                                                  | Up to 30m(Exir)                                                                    | Up to 40m                                                                           | Up to 20m (ColorVu)                                                                 | Up to 40m (ColorVu)                                                                 |
| IP Standard                | IP67                                                                              | IP67                                                                              | IP67                                                                               | IP66                                                                                | IP66                                                                                | IP67                                                                                |
| WDR                        | DWDR                                                                              | DWDR                                                                              | Yes (120db)                                                                        | DWDR                                                                                | Yes (130db)                                                                         | Yes (130db)                                                                         |
| Other Features             | ICR,AGC, Switchable,<br>Built in mic                                              | ICR,AGC, Switchable,<br>Built in mic                                              | Smart IR, HLC,BLC,<br>Switchable, 3D DNR                                           | Smart IR, ICR, AGC,<br>Switchable                                                   | AGC, Switchable, 3D<br>DNR                                                          | AGC, Switchable, 3D<br>DNR                                                          |
| Click for More information | <a href="#">توضیحات محصول</a>                                                     | <a href="#">توضیحات محصول</a>                                                     | <a href="#">توضیحات محصول</a>                                                      | <a href="#">توضیحات محصول</a>                                                       | <a href="#">توضیحات محصول</a>                                                       | <a href="#">توضیحات محصول</a>                                                       |

|                               |                                                                                   |                                                                                   |                                                                                    |                                                                                     |                                                                                     |
|-------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
|                               | 19                                                                                | 20                                                                                | 21                                                                                 | 22                                                                                  | 23                                                                                  |
| Part Number                   | DS-2CE76H0T-ITMF                                                                  | DS-2CE78H0T-IT1F                                                                  | DS-2CE79H0T-IT3ZF                                                                  | DS-2CE78U8T-IT3                                                                     | DS-2AE4225TI-D                                                                      |
|                               |  |  |  |  |  |
| Price (Rials)                 | 37,150,000                                                                        | 41,350,000                                                                        | 79,350,000                                                                         | 43,230,000                                                                          | 312,870,000                                                                         |
| Camera Type                   | Dome                                                                              | Dome                                                                              | Dome                                                                               | Dome                                                                                | PTZ                                                                                 |
| Resolution                    | 5MP (2560*1944)                                                                   | 5MP (2560*1944)                                                                   | 5MP (2560*1944)                                                                    | 8MP (3840*2160)                                                                     | 1920 × 1080                                                                         |
| Signal System                 | HDTVI,AHD,<br>HDCVI,ANLOG                                                         | HDTVI,AHD,<br>HDCVI,ANLOG                                                         | HDTVI,AHD,<br>HDCVI,ANLOG                                                          | HD-TVI                                                                              | HD-TVI                                                                              |
| Lens                          | 2.8mm Fixed                                                                       | 2.4 mm Fixed                                                                      | 2.7-13.5mm Motorized                                                               | 2.8/3.6/6mm Fixed                                                                   | 4.8 mm-120mm                                                                        |
| Viewing Angle                 | 85°                                                                               | 110°                                                                              | 95°-26°                                                                            | 102.2°/.79°/50.8°                                                                   | 25x Optical Zoom                                                                    |
| IR Range                      | Up to 30m (Exir)                                                                  | Up to 30m (Exir)                                                                  | Up to 40m                                                                          | Up to 60m (Exir)                                                                    | Up to 100m                                                                          |
| IP Standard                   | IP67                                                                              | IP67                                                                              | IP67                                                                               | IP67                                                                                | IP66                                                                                |
| WDR                           | DWDR                                                                              | DWDR                                                                              | DWDR                                                                               | Yes (120db)                                                                         | Yes (120db)                                                                         |
| Other Features                | Smart IR, ICR, AGC, BLC,<br>Switchable                                            | Smart IR, ICR, AGC,<br>BLC,HLC, Switchable                                        | Smart IR, 2D DNR,<br>Switchable, AGC                                               | Smart IR, ICR                                                                       | Smart IR, ICR,<br>Switchable, DarkFighter                                           |
| Click for More<br>information | <a href="#">توضیحات محصول</a>                                                     | <a href="#">توضیحات محصول</a>                                                     | <a href="#">توضیحات محصول</a>                                                      | <a href="#">توضیحات محصول</a>                                                       | <a href="#">توضیحات محصول</a>                                                       |

24

25

26

27

28

29

Part Number

DS-7216HGH-K1

IDS-7204HQHI-M1/S

DS-7208HQHI-M1/XT

DS-7216HQHI-M1/E

DS-7216HQHI-M1/XT

DS-7216HQHI-M2/XT



Price (Rials)

69,790,000

62,700,000

90,400,000

175,840,000

157,910,000

192,500,000

DVR Type

16+2 Ch. quadruple Hybrid  
HD-TVI /AHD/ Analog / IP4+1 Ch. quadruple Hybrid  
HD-TVI /AHD/ Analog / IP8+2 Ch. quadruple Hybrid  
HD-TVI /AHD/ Analog / IP16+2 Ch. quadruple Hybrid  
HD-TVI /AHD/ Analog / IP16+8 Ch. quadruple Hybrid  
HD-TVI /AHD/ Analog / IP16+8 Ch. quadruple Hybrid  
HD-TVI /AHD/ Analog / IP

Analog Video Input

16 Ch. HDTVI/Analog  
Up to 2MP4 Ch. HDTVI/Analog  
Up to 4MP8 Ch. HDTVI/Analog  
Up to 3K16 Ch. HDTVI/Analog  
Up to 3K16 Ch. HDTVI/Analog  
Up to 3K16 Ch. HDTVI/Analog  
Up to 3K

IP Video Input

2 Ch. Up to 5MP

1 Ch. Up to 6MP

2 Ch. Up to 6MP

2 Ch. Up to 6MP

8 Ch. Up to 6MP

8 Ch. Up to 6MP

Audio In/Out

1Ch. In / 1Ch. Out

1Ch. In / 1Ch. Out

1Ch. In / 1Ch. Out

1Ch. In / 1Ch. Out

1Ch. In / 1Ch. Out

1Ch. In / 1Ch. Out

Video Output

1 Port HDMI : 1080P  
1 Port VGA1 Port HDMI 1080P  
1 Port VGA1 Port HDMI 1080P  
1 Port VGA1 Port HDMI : 4K  
1 Port VGA1 Port HDMI : 4K  
1 Port VGA1 Port HDMI : 4K  
1 Port VGA

SATA Interface

1 HDD up to 10TB

1 HDD up to 10TB

1 HDD up to 10TB

1 HDD up to 10TB

1 HDD up to 12TB

2 HDD up to 12TB

Other Features

H.265/H.265 pro+  
Compression, ONVIF,  
Deep learningH.265/H.265+  
Compression, ONVIF,  
Smart SearchH.265/H.265 pro+  
Compression, ONVIFH.265/H.265 pro+  
Compression, ONVIFH.265/H.265 pro+  
Compression, ONVIFH.265/H.265+  
Compression, ONVIFClick for More  
information

توضیحات محصول

توضیحات محصول

توضیحات محصول

توضیحات محصول

توضیحات محصول

توضیحات محصول

تهران- خیابان سهروردی- بالاتر از خیابان هویزه کوچه سرمد پلاک 1

۰۲۱-۵۲۶۰۵



|                            | 30                                                                                | 31                                                                                | 32                                                                                 | 33                                                                                  | 34                                                                                  | 35                                                                                  |
|----------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
| Part Number                | IDS-7216HQHI-M2/S                                                                 | iDS-7232HQHI-M2/S                                                                 | DS-7204HUHI-K1/P                                                                   | DS-7204HUHI-M1/S                                                                    | DS-7204HUHI-M1/E                                                                    | DS-7216HUHI-K2                                                                      |
|                            |  |  |  |  |  |  |
| Price (Rials)              | 196,600,000                                                                       | 355,230,000                                                                       | 107,650,000                                                                        | 109,970,000                                                                         | 88,580,000                                                                          | 293,170,000                                                                         |
| DVR Type                   | 16+2 Ch. quadruple Hybrid HD-TVI /AHD/ Analog / IP                                | 32+2 Ch. quadruple Hybrid HD-TVI /AHD/ Analog / IP                                | 4 +4 Ch. quadruple Hybrid HD-TVI /AHD/ Analog / IP                                 | 4 + 2 Ch. quadruple Hybrid HD-TVI /AHD/ Analog / IP                                 | 4 + 2 Ch. quadruple Hybrid HD-TVI /AHD/ Analog / IP                                 | 16+16Ch.quadruple Hybrid HD-TVI /AHD/ Analog / IP                                   |
| Analog Video Input         | 16 Ch. HDTV/Analog Up to 4MP                                                      | 32 Ch. HDTV/Analog Up to 4MP                                                      | Support Up to 8MP resolution recording                                             | Support Up to 8MP resolution recording                                              | Support Up to 8MP resolution recording                                              | Support Up to 8MP resolution recording                                              |
| IP Video Input             | 2 Ch. Up to 6MP                                                                   | 2 Ch. Up to 6MP                                                                   | 4 Ch. Up to 8MP                                                                    | 2 Ch. Up to 8MP                                                                     | 2 Ch. Up to 8MP                                                                     | 16 Ch. Up to 8MP                                                                    |
| Audio In/Out               | 1Ch. In / 1Ch. Out                                                                | 1Ch. In / 1Ch. Out                                                                | 4Ch. In / 1Ch. Out                                                                 | 1Ch. In / 1Ch. Out                                                                  | 1Ch. In / 1Ch. Out                                                                  | 4Ch. In / 1Ch. Out                                                                  |
| Video Output               | 1 Port HDMI : 4K<br>1 Port VGA                                                    | 1 Port HDMI : 4K<br>1 Port VGA                                                    | 1 Port HDMI : 2K<br>1 Port VGA                                                     | 1 Port HDMI : 2K<br>1 Port VGA                                                      | 1 Port HDMI : 2K<br>1 Port VGA                                                      | 1 Port HDMI : 4K<br>1 Port VGA                                                      |
| SATA Interface             | 2 HDD up to 10TB                                                                  | 2 HDD up to 10TB                                                                  | 1 HDD up to 10TB                                                                   | 1 HDD up to 10TB                                                                    | 1 HDD up to 10TB                                                                    | 2 HDD up to 10TB                                                                    |
| Other Features             | H.265/H.265+ Compression, ONVIF, Smart Search                                     | H.265/H.265+ Compression, ONVIF, VCA, Smart Search                                | H.265/H.265+ COMPR Alarm In/Out : 4/1 Built-in PoC                                 | H.265/H.265+ COMPR Alarm In/Out : N/A                                               | H.265 Pro+/H.265 Pro, Onvif                                                         | H.265/H.265+ COMPR Alarm In/Out : 16/4                                              |
| Click for More information | <a href="#">توضیحات محصول</a>                                                     | <a href="#">توضیحات محصول</a>                                                     | <a href="#">توضیحات محصول</a>                                                      | <a href="#">توضیحات محصول</a>                                                       | <a href="#">توضیحات محصول</a>                                                       | <a href="#">توضیحات محصول</a>                                                       |

Part Number **IDS-7208HTHI-M2/S**



|                               |                                                     |
|-------------------------------|-----------------------------------------------------|
| Price (Rials)                 | 300,200,000                                         |
| DVR Type                      | 8+8 Ch.quadruple Hybrid<br>HD-TVI /AHD/ Analog / IP |
| Analog Video Input            | Support<br>Up to 8MP resolution<br>recording        |
| IP Video Input                | 8 Ch. Up to 8MP                                     |
| Audio In/Out                  | 1Ch. In / 1Ch. Out                                  |
| Video Output                  | 1 Port HDMI : 4K<br>1 Port VGA                      |
| SATA Interface                | 2 HDD up to 10TB                                    |
| Other Features                | H.265/H.265+ COMPR<br>Alarm In/Out : N/A            |
| Click for More<br>information | توضیحات محصول                                       |

| مدل ردیف                     | مشخصات فنی                                                                                                                                                                                                                                                                                                                                                                                                           | تصویر                                                                                 | قیمت (ریال) |
|------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|-------------|
| 1 HAC-HFW1509MHP-A-LED-S2    | <p>5MP Full-color HDCVI Bullet Camera<br/>Progressive CMOS<br/>Minimum Illumination 0.001 Lux/F1.0, 0 Lux warm light on<br/>Max 5MP@25fps (16:9 video output)<br/>3.6mm fixed lens<br/><b>Built-in Mic</b><br/>CVI/CVBS/AHD/TVI Switchable, Support OSD Menu<br/>120 dB true WDR, HLC, HLC-Pro, BLC, 3D DNR, AGC, AWB<br/>2 LEDs 50m Distance, Smart Light, IP67, DC12V</p>                                          |    | 48,450,000  |
| 2 HAC-HFW1509TMP-IL-A        | <p>5MP Smart Dual Illuminators Bullet Camera<br/>Max 25 fps@5MP (16:9 video output).<br/>120 dB true WDR, 3D NR.<br/>Smart Dual Illuminators, 40 m illumination distance<br/>Min. Illumination, 0.001 lux@F1.0 (Color, 30 IRE), 0.0001 lux@F1.0 (B/W, 30 IRE)<br/>Super Adapt, Built-in MIC, BLC; HLC; WDR; HLC-Pro<br/>3.6 mm fixed lens (2.8 mm optional).<br/>CVI/CVBS/AHD/TVI switchable, IP67, 12 VDC</p>       |    | 57,300,000  |
| 3 HAC-HFW1509TLM-A-LED       | <p>5MP Full-color HDCVI Bullet Camera<br/>5MP 1/2.7 inch Progressive CMOS<br/>Minimum Illumination 0.001 Lux/F1.0, 0 Lux warm light on<br/>Max 5MP@25fps (16:9 video output)<br/>3.6mm fixed lens<br/><b>Built-in Mic</b><br/>CVI/CVBS/AHD/TVI Switchable, Support OSD Menu<br/>WDR(120db), HLC, BLC, 3D DNR, AGC, AWB<br/>2 LEDs 40m Distance, Smart Light, IP67, DC12V</p>                                         |    | 46,300,000  |
| 4 HAC-HFW1509TLMP-LED-S2     | <p>5MP Full-color HDCVI Bullet Camera<br/>5MP 1/2.7 inch Progressive CMOS<br/>Minimum Illumination 0.001 Lux/F1.0, 0 Lux warm light on<br/>Max 5MP@25fps (16:9 video output)<br/>3.6mm fixed lens<br/>CVI/CVBS/AHD/TVI Switchable, Support OSD Menu<br/>WDR(120db), HLC, BLC, 3D DNR, AGC, AWB<br/>2 LEDs 40m Distance, Smart Light, IP67, DC12V</p>                                                                 |  | 43,500,000  |
| 5 HAC-HFW1509TP-LED          | <p>5MP Full-color HDCVI Bullet Camera<br/>5MP 1/2.7 inch Progressive CMOS<br/>Minimum Illumination 0.001 Lux/F1.0, 0 Lux warm light on<br/>Max 5MP@25fps (16:9 video output)<br/>3.6mm fixed lens<br/>CVI/CVBS/AHD/TVI Switchable, Support OSD Menu<br/>WDR(120db), HLC, HLC-Pro, BLC, 3D DNR, AGC, AWB<br/>1 LED 20m Distance, Smart Light, IP67, DC12V</p>                                                         |  | 42,800,000  |
| 6 HAC-HFW1509TP-A            | <p>5MP Full-color HDCVI Bullet Camera<br/>5MP 1/2.7 inch Progressive CMOS<br/>Minimum Illumination 0.001 Lux/F1.0, 0 Lux warm light on<br/>Max 5MP@25fps (16:9 video output)<br/><b>Built-in mic</b><br/>3.6mm fixed lens<br/>CVI/CVBS/AHD/TVI Switchable, Support OSD Menu<br/>WDR(120db), HLC, HLC-Pro, BLC, 3D DNR, AGC, AWB<br/>1 LED 20m Distance, Smart Light, IP67, DC12V</p>                                 |  | 43,800,000  |
| 7 DH-HAC-HFW1500RP-Z-IRE6-S2 | <p>5MP Starlight HDCVI IR Bullet Camera, Image Sensor 1/2.7 inch CMOS<br/>Max 25 fps@5MP (16:9 video output)<br/>CVI/CVBS/AHD/TVI switchable<br/>2.7 mm-12 mm motorized lens, 0.005 Lux/F1.6, 30IRE, 0 Lux IR on<br/>Illumination Distance 60 m, S/N Ratio &gt; 65 dB<br/>Pan/Tilt/Rotation Range Pan: 0°-360°, Tilt: 0°-90°, Rotation: 0°-360°<br/>Max. IR length 60 m, Smart IR, BLC/HLC/DWDR<br/>IP67, 12V DC</p> |  | 58,300,000  |

| مدل ردیف |                           | مشخصات فنی                                                                                                                                                                                                                                                                                                                                                                                                | تصویر                                                                                 | قیمت (ریال) |
|----------|---------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|-------------|
| 8        | HFW1500TLM-IL-A-S2        | 5MP Smart Dual Light HDCVI Fixed-focal Bullet Camera<br>Max 25 fps@5MP (16:9 video output)<br>3.6 mm fixed lens, 0.05 lux@F1.6 (Color, 30 IRE), 0.005 lux@F1.6 (B/W, 30 IRE), 0 lux (Illuminator on), 40 m illumination distance<br>Smart Dual Light, Super Adapt, Auto ICR, BLC, HLC, DWDR, AWB, AGC, 2D NR,<br><b>Built-in MIC</b><br>IP67, 12 VDC, Metal + Plastic Case                                |    | 37,600,000  |
| 9        | DH-HAC-HFW1500THP-I4      | 5MP HDCVI IR Bullet Camera, 1/2.7" Progressive Scan CMOS<br>20fps@5MP, 25/30fps@4MP (16:9 video output)<br>3.6mm fixed lens, Aperture: F1.85<br>DWDR, Day/Night(ICR), AWB, AGC, BLC, HLC, 2DNR<br>Support Electronic Defog, HD/SD switchable<br>Max. IR length 40m, Smart IR, IP67, DC12V±30                                                                                                              |    | 28,900,000  |
| 10       | DH-HAC-HFW1500THP-I8      | 5MP HDCVI IR Bullet Camera, 1/2.7" Progressive Scan CMOS<br>20fps@5MP, 25/30fps@4MP (16:9 video output)<br>3.6mm fixed lens, Aperture: F1.85<br>DWDR, Day/Night(ICR), AWB, AGC, BLC, HLC, 2DNR<br>Support Electronic Defog, HD/SD switchable<br>Max. IR length 80m, Smart IR, IP67, DC12V±30                                                                                                              |    | 33,100,000  |
| 11       | DH-HAC-HFW1500TP-0360B-S3 | 5MP Starlight HDCVI IR Bullet Camera<br>Max 25 fps@5MP (16:9 video output)<br>3.6 mm fixed lens, Max. Aperture F1.6<br>DWDR, Day/Night(ICR), AWB, AGC, BLC, HLC, 2DNR<br>CVI/CVBS/AHD/TVI switchable, Support OSD Menu<br>Max. IR length 30 m, Smart IR, IP67, DC12V                                                                                                                                      |    | 28,450,000  |
| 12       | DH-HAC-HFW1500DP          | 5MP Starlight HDCVI IR Bullet Camera<br>Max 25 fps@5MP (16:9 video output)<br>3.6 mm fixed lens, Max. Aperture F1.6/Min. Illumination 0.005 Lux<br>DWDR, Day/Night(ICR), AWB, AGC, BLC, HLC, 2DNR<br>CVI/CVBS/AHD/TVI switchable, Support OSD Menu<br>Max. IR length 80 m, Smart IR, IP67, DC12V                                                                                                          |    | 39,900,000  |
| 13       | DH-HAC-HFW1500CMP         | 5MP Starlight HDCVI IR Bullet Camera<br>Max 25 fps@5MP (16:9 video output)<br>3.6 mm fixed lens, Max. Aperture F1.6/Min. Illumination 0.005 Lux<br>DWDR, Day/Night(ICR), AWB, AGC, BLC, HLC, 2DNR<br>CVI/CVBS/AHD/TVI switchable, Support OSD Menu<br>Max. IR length 30 m, Smart IR, IP67, DC12V                                                                                                          |  | 28,450,000  |
| 14       | DH-HAC-B2A51P-U-IL-S2     | <b>NEW</b><br>5MP Smart Dual Light HDCVI Fixed-focal Bullet Camera<br>5 MP Progressive CMOS, HD/SD Output<br>Max 25 fps@5MP (16:9 video output), 3.6 mm: H: 92°; V: 48°; D: 109°<br>Min. Illumination 0.02 lux@F2.0 (Color, 30 IRE) 0.002 lux@F2.0 (B/W, 30 IRE) 0 lux (Illuminator on), IR: 30m, Warm Light: 20m<br>Smart Dual Light, DWDR, BLC, HLC, 2D DNR, AWB, AGC<br>IP67, 12 VDC ± 30%, Metal Case |  | 28,600,000  |
| 15       | HAC-B1A51                 | 5MP HDCVI IR Bullet Camera, 1/2.7" 5 MegaPixel CMOS<br>20fps@5MP, 25/30fps@4MP, 25/30@1080P (16:9 video output)<br>3.6mm, 2.8mm fixed lens, HD and SD output switchable<br>DWDR, Day/Night(ICR), BLC, HLC, AGC, AWB, 2D-DNR, Support OSD Menu, Max. IR length 20m, Smart IR, IP67, DC12V, Casing Plastic                                                                                                  |  | 21,800,000  |
| 16       | DH-HAC-B2A51P             | 5MP HDCVI IR Bullet Camera, 1/2.7" 5 MegaPixel CMOS<br>20fps@5MP, 25/30fps@4MP, 25/30@1080P (16:9 video output)<br>3.6mm fixed lens, HD and SD output switchable<br>DWDR, Day/Night(ICR), BLC, HLC, AGC, AWB, 2D-DNR, Support OSD Menu, Max. IR length 20m, Smart IR<br>IP67, DC12V, Casing Aluminium                                                                                                     |  | 25,450,000  |
| 17       | DH-HAC-B1A41P             | 4MP HDCVI IR Bullet Camera, 1/2.7" 4Megapixel CMOS<br>25/30fps@4MP, 25/30fps@1080P, 3.6mm fixed lens<br>HD and SD output switchable, Max. IR length 20m<br>IP67, DC12V, Casing: Plastic                                                                                                                                                                                                                   |  | 18,400,000  |
| 18       | DH-HAC-B2A41P             | 4MP HDCVI IR Bullet Camera, 1/2.7" 4Megapixel CMOS<br>25/30fps@4MP, 25/30fps@1080P, 3.6mm fixed lens<br>HD and SD output switchable, Max. IR length 20m<br>IP67, DC12V, Casing: Aluminium                                                                                                                                                                                                                 |  | 22,500,000  |

**توجه:** دستگاه های جدید XVR (به جز دستگاه های ستاره دار)، دوربین هایی که میکروفون داخلی (Built-in MIC) دارند را پشتیبانی نمی کند. لطفا در انتخاب محصول دقت نمایید.

| مدل ردیف                    | مشخصات فنی                                                                                                                                                                                                                                                                                                                                                                                                                                                | تصویر                                                                                 | قیمت (ریال) |
|-----------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|-------------|
| 19 HFW1239TLMP-IL-A         | <p>2MP Smart Dual Illuminators Bullet Camera<br/> Progressive CMOS - Focal Length 3.6 mm<br/> Max. 30 fps@1080p<br/> 0.001 lux@F1.6 (Color, 30 IRE) - 0.0001 lux(B/W, 30 IRE) - 0 lux (Illuminator on)<br/> Smart Dual Illuminators - <b>Built-in-mic</b><br/> CVI/CVBS/AHD/TVI Switchable, Support OSD Menu<br/> 130 dB true WDR, HLC, BLC, 3D DNR, AGC, AWB<br/> 2 LEDs 40m distance - 2 IR Lights 40m distance<br/> Smart IR &amp; WL, IP67, DC12V</p> |    | 36,300,000  |
| 20 HFW1239MHP-A-LED         | <p>2MP Full-color HDCVI Bullet Camera, 1/2.8" CMOS ,24/7 color imaging<br/> Max. 30 fps@1080p,3.6 mm fixed lens (6 mm optional)<br/> 50 m illumination distance , Super Adapt, 130 dB true WDR, 3D NR<br/> Focal Length 3.6 mm; 6 mm , Built-in mic ,CVI/CVBS/AHD/TVI switchable<br/> Min Illumination 0.001 Lux/F1.6, 30IRE, 0 Lux LED on , IP67, DC 12 V</p>                                                                                            |    | 41,250,000  |
| 21 DH-HAC-HFW1239TLMP-A-LED | <p>2M Full-color Starlight HDCVI Bullet Camera<br/> 1/2.8 inch 2.16 MP CMOS<br/> Minimum Illumination:0.005Lux/F1.6<br/> 1080@25fps, 720@25/50fps<br/> 3.6mm fixed lens<br/> <b>Built-in mic</b><br/> CVI/CVBS/AHD/TVI Switchable<br/> WDR (130 db) , BLC, HLC, 2DNR,AGC,AWB Electronic Defog<br/> 40m LED distance, IP67, DC12V</p>                                                                                                                      |    | 32,950,000  |
| 22 DH-HAC-HFW1239TLMP-LED   | <p>2M Full-color Starlight HDCVI Bullet Camera<br/> 1/2.8 inch 2.16 Mega Pixels Progressive CMOS<br/> 0.005Lux/F1.6, 30IRE, 0Lux white Light on<br/> Max. 30fps@1080P<br/> 3.6mm fixed lens, 16x Digital Zoom<br/> CVI/TVI/AHD/CVBS Switchable, Support OSD Menu<br/> WDR (130 db)/E-Defog/BLC/HLC/AWB/AGC/2D DNR<br/> 40m LED Distance<br/> Smart Light, IP67, DC12V</p>                                                                                 |    | 32,500,000  |
| 23 HAC-HFW1239TP-LED        | <p>2MP Full-color HDCVI Bullet Camera<br/> 2MP 1/2.8" Progressive CMOS<br/> Max 2MP@25/30fps<br/> 3.6mm fixed lens<br/> CVI/CVBS/AHD/TVI switchable, Support OSD Menu<br/> WDR(130db), BLC, HLC, AWB, AGC, 3D DNR<br/> Smart Light, 1 LED 20m Distance, IP67, DC12V</p>                                                                                                                                                                                   |  | 31,200,000  |
| 24 DH-HAC-HFW1231RP-Z-A     | <p>2MP Starlight HDCVI IR Bullet Camera<br/> 1/2.8" 2Megapixel CMOS (Starlight)<br/> Minimum Illumination:0.002Lux/F1.5<br/> 1080@25fps, 720@25/50fps<br/> 2.7-12mm motorized lens<br/> HD and SD output switchable, <b>Built in mic</b>,<br/> WDR(130dB), BLC, HLC, 3DNR, AGC,AWB<br/> 80m LED distance, Smart IR, IP67, DC12V</p>                                                                                                                       |  | 53,200,000  |
| 25 DH-HAC-HFW1231RP-Z-IRE6  | <p>2MP Starlight HDCVI IR Bullet Camera<br/> 1/2.8" 2Megapixel CMOS (Starlight)<br/> Minimum Illumination:0.002Lux/F1.5<br/> 1080@25fps, 720@25/50fps<br/> 2.7-12mm motorized lens<br/> HD and SD output switchable<br/> WDR(130dB), BLC, HLC, 3DNR, AGC,AWB<br/> 80m LED distance, Smart IR, IP67, DC12V</p>                                                                                                                                             |  | 51,900,000  |
| 26 DH-HAC-HFW1230RP-Z-IRE6  | <p>2MP Starlight HDCVI IR Bullet Camera<br/> 1/2.8" 2Megapixel CMOS (Starlight)<br/> Minimum Illumination:0.005Lux/F1.8<br/> 1080@25fps, 720@25/50fps<br/> 2.7-12mm motorized lens<br/> HD and SD output switchable<br/> DWDR, BLC, HLC, 2DNR, AGC,AWB<br/> 60m LED distance, Smart IR, IP67, DC12V</p>                                                                                                                                                   |  | 47,100,000  |
| 27 DH-HAC-HFW1230TP         | <p>2MP Starlight HDCVI IR Bullet Camera, 1/2.8" 2Megapixel CMOS<br/> 25/30fps@1080P, 25/30/50/60fps@720P<br/> 3.6mm fixed lens (2.8mm, 6mm Optional)<br/> HD and SD output switchable, Support OSD Menu<br/> Starlight, DWDR, Day/Night(ICR), AWB, AGC, BLC, HLC, 2D-DNR<br/> Max. IR LEDs length 30m, Smart IR, IP67, DC12V, Casing: Aluminium</p>                                                                                                       |  | 22,800,000  |

**توجه:** دستگاه های جدید XVR(به جز دستگاه های ستاره دار)، دوربین هایی که میکروفن داخلی (Built-in MIC) دارند را پشتیبانی نمی کند. لطفا در انتخاب محصول دقت نمایید.

| مدل ردیف                                                                                                                                                                                                                                                                                 | مشخصات فنی                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | تصویر                                                                                 | قیمت (ریال) |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|-------------|
| 28 DH-HAC-HFW1230TP-A<br>                                                                                                                                                                                | 2MP Starlight HDCVI IR Bullet Camera, 1/2.8" 2Megapixel CMOS<br>25/30fps@1080P, 25/30/50/60fps@720P, 3.6mm fixed lens<br>HD and SD output switchable, <b>Built-in mic</b><br>DWDR, Day/Night(ICR), AWB, AGC, BLC, HLC, 2D-DNR<br>Max. IR LEDs length 30m, Smart IR, IP67, DC12V                                                                                                                                                                                                                                                                                                                                                                                                            |    | 23,350,000  |
| 29 DH-HAC-HFW1230DP<br>                                                                                                                                                                                  | 1/2.8" 2Megapixel CMOS (Starlight)<br>3.6mm Fixed lens, 25/30fps@1080P & @720P<br>DWDR, Day/Night(ICR), AWB, AGC, BLC, HLC, 2DNR<br>HD and SD output switchable, OSD Menu<br>Max. IR length 80m, Smart IR, IP67, DC12V                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |    | 30,100,000  |
| 30 DH-HAC-HFW1220THP-I4<br>                                                                                                                                                                              | 2MP Value Starlight HDCVI IR Bullet Camera<br>1/2.7 inch CMOS<br>1080P@25fps, 720P@25fps, 720@50fps<br>3.6mm Fixed lens<br>Value Starlight<br>Minimum Illumination:0.008Lux/F1.85<br>DWDR, Day/Night(ICR), AWB, AGC, BLC, HLC, 2D DNR<br>Smart IR, Eletronic Defog<br>CVI/CVBS/AHD/TVI switchable<br>Max. IR length 40m, Smart IR, IP67, DC12V                                                                                                                                                                                                                                                                                                                                             |    | 23,350,000  |
| 31 HAC-HFW1209TLMP-LED-0360B<br>                                                                                                                                                                        | 2MP Full-color HDCVI Bullet Camera<br>1/2.8 inch 2MP Progressive CMOS<br>Max. 30fps@1080P<br>3.6mm Fixed lens<br>Min. Illumination 0.001 Lux/F1.6, 30IRE, 0 Lux LED on<br>DWDR, Day/Night(ICR), AWB, AGC, BLC, HLC, 3D DNR<br>CVI/CVBS/AHD/TVI switchable, OSD Menu Support<br>40m LED distance, IP67, DC12V                                                                                                                                                                                                                                                                                                                                                                               |    | 25,950,000  |
| 32 HAC-HFW1209CMP-LED-0360B-S2<br>                                                                                     | 2MP Full Color Starlight HDCVI Bullet CCTV Camera<br>1/2.8 inch 2.16 Mega Pixels Progressive CMOS<br>Max 30fps@2MP<br>3.6mm fixed lens<br>CVI/TVI/AHD/CVBS Switchable, Support OSD Menu<br>DWDR/E-Defog/BLC/HLC/AWB/AGC/2D DNR<br>20m LED Distance<br>Smart Light, IP67, DC12V                                                                                                                                                                                                                                                                                                                                                                                                             |   | 24,300,000  |
| 33 HAC-HFW1209CP-LED-0360B<br>                                                                                                                                                                        | 2MP Full-color HDCVI Bullet Camera<br>1/2.8 inch 2MP Progressive CMOS<br>Max. 30fps@1080P<br>3.6mm fixed lens<br>CVI/CVBS/AHD/TVI Switchable, Support OSD Menu<br>DWDR/BLC/AWB/AGC/2D DNR<br>20m LED Distance<br>Smart Light, IP67, DC12V                                                                                                                                                                                                                                                                                                                                                                                                                                                  |  | 19,750,000  |
| 34 HAC-HFW1200TLM-IL-A-S6<br>   | 2MP Smart Dual Light HDCVI Fixed-focal Bullet Camera<br><b>* In order to use the Smart Dual Light HDCVI camera, the firmware of XVR must be upgraded to V4.001.0000004.1.R.220323 or later version.</b><br>2 MP Progressive CMOS Sensor 3.6 mm Lens: H: 83°; V: 48°; D: 105°<br>Max. 30 fps@1080p, CVI/CVBS/AHD/TVI switchable<br>DWDR, BLC, HLC, AWB, AGC, Day/Night Auto(ICR)/Color/B/W, Smart Dual Light,<br>Illumination Distance IR: 40 m (131.23 ft) Warm light: 40 m (131.23 ft) , Super Adapt, 3D<br>DNR, <b>Built-in mic, 1 Audio in</b><br>Min. Illumination 0.01 lux@F2.0 (Color, 30 IRE) 0.001 lux@F2.0 (B/W, 30 IRE) 0 lux<br>(Illuminator on)<br>12 VDC, IP67, Metal+Plastic |  | 25,600,000  |
| 35 DH-HAC-HFW1200RP-Z-IRE6<br>                                                                                                                                                                        | 2MP HDCVI IR Bullet Camera, 1/2.7 inch CMOS<br>Max 30fps@1080P, Min Illumination 0.02Lux/F1.7, 30IRE, 0Lux IR on<br>Motorized vari-focal 2.7 mm-12 mm, Fixed iris<br>BLC/HLC/DWDR , Gain Control , Noise Reduction 2D NR , Smart IR<br>Max. IR length 60m,IP67, DC12V<br>Built-in mic(-A)                                                                                                                                                                                                                                                                                                                                                                                                  |  | 45,500,000  |
| 36 DH-HAC-HFW1200TLP                                                                                                                                                                                                                                                                     | 1/2.7" 2Megapixel CMOS, 25/30fps@1080P, 50/60fps@720P<br><b>3.6 &amp; 2.8mm</b> fixed lens<br>HD and SD output switchable, Support OSD Menu<br>DWDR, Day/Night(ICR), AWB, AGC, BLC, HLC, 2D-DNR<br>Max. IR LEDs length 40m, Smart IR, IP67, DC12V                                                                                                                                                                                                                                                                                                                                                                                                                                          |  | 19,600,000  |
| 37 DH-HAC-HFW1200THP-A<br>                                                                                                                                                                            | 2MP HDCVI IR Bullet Camera<br>1/2.7" 2Megapixel CMOS, 25/30fps@1080P, 50/60fps@720P<br>3.6mm fixed lens (2.8mm, 6mm Optional), <b>Built-in mic</b><br>HD and SD output switchable, Support OSD Menu<br>DWDR, Day/Night(ICR), AWB, AGC, BLC, HLC, 2D-DNR<br>Max. IR LEDs length 80m, Smart IR, IP67, DC12V                                                                                                                                                                                                                                                                                                                                                                                  |  | 22,400,000  |

**توجه:** دستگاه های جدید XVR(به جز دستگاه های ستاره دار)، دوربین هایی که میکروفون داخلی (Built-in MIC) دارند را پشتیبانی نمی کند. لطفا در انتخاب محصول دقت نمایید.

| مدل ردیف                     | مشخصات فنی                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | تصویر                                                                                 | قیمت (ریال) |
|------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|-------------|
| 38 DH-HAC-HFW1200THP-I4      | 2MP HDCVI IR Bullet Camera<br>1/2.7 inch CMOS<br>1080P@25fps, 720P@25fps, 720@50fps<br>3.6mm Fixed lens<br>Minimum Illumination:0.02Lux/F1.9<br>DWDR, Day/Night(ICR), AWB, AGC, BLC, HLC, 2DNR<br>Smart IR, Eletronic Defog<br>HD and SD output switchable<br>Max. IR length 40m, Smart IR, IP67, DC12V                                                                                                                                                                                                                                                                                                                                                  |    | 22,000,000  |
| 39 DH-HAC-HFW1200DP-0360B-S5 | 1/2.7" 2Megapixel CMOS, 25/30fps@1080P, 50/60fps@720P<br>DWDR, Day/Night(ICR), AWB, AGC, HLC, BLC, 2D-DNR<br>HD and SD output switchable, 3.6mm fixed lens<br>Max. IR LEDs length 80m, Smart IR, IP67, DC12V                                                                                                                                                                                                                                                                                                                                                                                                                                             |    | 26,400,000  |
| 40 HAC-HFW1200CMP-0360B      | 2MP HDCVI IR Bullet Camera<br>1/2.7 inch Progressive CMOS<br>Max 30fps@2MP, 3.6mm fixed lens<br>CVI/TVI/AHD/CVBS output switchable, Support OSD Menu<br>DWDR/E-Defog/BLC/HLC/AWB/AGC/2D DNR/Day-Night Auto ICR<br>Max. IR length 30m, Smart IR, IP67, DC12V                                                                                                                                                                                                                                                                                                                                                                                              |    | 20,850,000  |
| 41 HAC-HFW1200CMP-A          | 2MP HDCVI IR Bullet Camera<br>1/2.7 inch Progressive CMOS<br>Max 30fps@2MP, 3.6mm fixed lens, <b>Built-in mic</b><br>CVI/TVI/AHD/CVBS output switchable, Support OSD Menu<br>DWDR/E-Defog/BLC/HLC/AWB/AGC/2D DNR/Day-Night Auto ICR<br>Max. IR length 30m, Smart IR, IP67, DC12V                                                                                                                                                                                                                                                                                                                                                                         |    | 22,400,000  |
| 42 HAC-HFW1200CM-IL-A-S6     | 2MP Smart Dual Light HDCVI Fixed-focal Bullet Camera<br><b>* In order to use the Smart Dual Light HDCVI camera, the firmware of XVR must be upgraded to V4.001.0000004.1.R.220323 or later version.</b><br>2 MP Progressive CMOS Sensor 3.6 mm: H: 83°; V: 48°; D: 105°<br>Max. 30 fps@1080p, CVI/CVBS/AHD/TVI switchable<br>DWDR, BLC, HLC, AWB, AGC, 3D DNR, Day/Night Auto(ICR)/Color/B/W, Smart Dual Light, Illumination Distance IR: 20m (65.62 ft) Warm light: 20m (65.62 ft), Super Adapt, Built-in mic, 1 Audio in<br>Min. Illumination 0.01 lux@F2.0 (Color, 30 IRE) 0.001 lux@F2.0 (B/W, 30 IRE) 0 lux (Illuminator on)<br>12 VDC, IP67, Metal |    | 24,500,000  |
| 43 DH-HAC-HFW1200SP          | 1/2.7" 2Megapixel CMOS, 25/30fps@1080P, 50/60fps@720P<br>3.6mm fixed lens<br>HD and SD output switchable, Support OSD Menu<br>DWDR, Day/Night(ICR), AWB, AGC, BLC,HLC, 2DNR<br>Max. IR length 30m, Smart IR, IP67, DC12V                                                                                                                                                                                                                                                                                                                                                                                                                                 |  | 20,950,000  |
| 44 DH-HAC-HFW1200TP          | 1/2.7" 2Megapixel CMOS<br>25/30fps@1080P, 25/30/50/60fps@720P, 2.8mm/3.6mm fixed lens<br>HD and SD output switchable, Support OSD Menu<br>DWDR, Day/Night(ICR), AWB, AGC, BLC,HLC, 2DNR<br>Max. IR length 25m, Smart IR, IP67, DC12V                                                                                                                                                                                                                                                                                                                                                                                                                     |  | 21,800,000  |
| 45 DH-HAC-HFW1200TP-A        | 1/2.7" 2Megapixel CMOS, 25/30fps@1080P, 50/60fps@720P<br>3.6mm fixed lens, <b>Built-in mic</b><br>HD and SD output switchable, Support OSD Menu<br>DWDR, Day/Night(ICR), AWB, AGC, BLC,HLC, 2DNR<br>Max. IR length 30m, Smart IR, IP67, DC12V                                                                                                                                                                                                                                                                                                                                                                                                            |  | 22,400,000  |
| 46 DH-HAC-HUM3201B           | 1/2.8" 2Megapixel CMOS( <b>Starlight</b> ), 25/30fps@1080P & @720P<br>2.8mm fixed lens<br>HD and SD output switchable, Support OSD Menu<br>WDR(120dB), Day/Night(ICR), AWB, AGC, BLC,HLC, 3DNR, DC12V                                                                                                                                                                                                                                                                                                                                                                                                                                                    |  | 27,500,000  |
| 47 DH-HAC-B2A21P-U           | 2MP IR HDCVI Fixed-focal Bullet Camera<br>2 MP Progressive CMOS Sensor<br>Max. 30 fps@1080p, 3.6 mm fixed lens<br>CVI/CVBS/AHD/TVI switchable<br>IR 30m, 0.02 lux@F2.0 (Color, 30 IRE), HFoV 80°<br>DWDR, AGC, AWB, 2D DNR, Smart IR<br>IP67, Metal Case                                                                                                                                                                                                                                                                                                                                                                                                 |  | 17,700,000  |
| 48 DH-HAC-B2A21P             | 1/2.7" 2Megapixel CMOS<br>25/30fps@1080P, 25/30/50/60fps@720P, 3.6mm fixed lens<br>HD and SD output switchable, Support OSD Menu<br>DWDR, Day/Night(ICR), AWB, AGC, BLC, HLC, 2DNR<br>Max. IR length 20m, Smart IR, IP67, DC12V, Casing: Aluminium                                                                                                                                                                                                                                                                                                                                                                                                       |  | 17,400,000  |
| 49 DH-HAC-B1A21P             | 1/2.7" 2Megapixel CMOS<br>25/30fps@1080P, 25/30/50/60fps@720P, 3.6mm fixed lens<br>HD and SD output switchable, Support OSD Menu<br>DWDR, Day/Night(ICR), AWB, AGC, BLC, HLC, 2DNR<br>Max. IR length 20m, Smart IR, IP67, DC12V, Casing: Plastic                                                                                                                                                                                                                                                                                                                                                                                                         |  | 14,200,000  |

**توجه:** دستگاه های جدید XVR(به جز دستگاه های ستاره دار)، دوربین هایی که میکروفون داخلی (**Built-in MIC**) دارند را پشتیبانی نمی کند. لطفا در انتخاب محصول دقت نمایید.

| مدل ردیف | مشخصات فنی                                                                                                                                                                                         | تصویر                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | قیمت (ریال)                                                                                      |
|----------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------|
| 50       | DH-HAC-HDW1509TP-IL-A<br>        | 5MP Smart Dual Illuminators Eyeball Camera<br>Max 25 fps@5MP (16:9 video output).<br>120 dB true WDR, 3D NR<br>Smart Dual Illuminators, 40 m illumination distance<br>Super Adapt, Built-in MIC.<br>3.6 mm fixed lens (2.8 mm optional).<br>CVI/CVBS/AHD/TVI switchable.<br>IP67, 12 VDC.                                                                                                                                                                                                                                                                                                                                                                                                                              |  54,150,000   |
| 51       | DH-HDW1509TP-A-LED<br>            | 5MP Full-color HDCVI Eyeball Camera<br>Progressive CMOS - Focal Length 2.8 mm<br>Min. Illumination 0.001 Lux/F1.0, 0 Lux warm light on<br>Illumination 2 LEDs Distance 40 m<br><b>Built-in mic</b> , CVI/CVBS/AHD/TVI switchable<br>WDR 120db, BLC, HLC, HLC-Pro, AWB, AGC, 3DNR<br>Privacy Masking, Smart Light, IP67, DC 12V                                                                                                                                                                                                                                                                                                                                                                                         |  46,300,000   |
| 52       | DH-HAC-HDW1509TLQP-A-LED-S2<br>  | 5MP Full-color HDCVI Quick-to-install Eyeball Camera<br>25fps@5MP, 25/30fps@4MP/1080P, 3.6mm Fixed Lens<br>HD and SD output switchable, Support OSD Menu<br>120dB WDR, 3D/2D NR, Day/Night(ICR), AWB, AGC, BLC, HLC<br>20m illumination distance, Smart IR, IP67, DC12V, <b>Built-in mic</b>                                                                                                                                                                                                                                                                                                                                                                                                                           |  43,950,000   |
| 53       | DH-HAC-HDW1509TLQP-LED<br>                                                                                        | 5MP Full-color HDCVI Quick-to-install Eyeball Camera<br>25fps@5MP, 25/30fps@4MP/1080P, 3.6mm Fixed Lens<br>HD and SD output switchable, Support OSD Menu<br>120dB WDR, 3D/2D NR, Day/Night(ICR), AWB, AGC, BLC, HLC<br>20m illumination distance, Smart IR, IP67, DC12V                                                                                                                                                                                                                                                                                                                                                                                                                                                |  39,500,000   |
| 54       | DH-HAC-HDW1500SLP                                                                                                                                                                                  | 5MP HDCVI IR Eyeball Camera, 1/2.7" 5Megapixel CMOS<br>20fps@5MP, 25/30fps@4MP/1080P, 3.6mm Fixed Lens<br>HD and SD output switchable, Support OSD Menu<br>DWDR, Day/Night(ICR), AWB, AGC, BLC, HLC, 2D-DNR<br>Max. IR LEDs length 20m, Smart IR, IP67, DC12V                                                                                                                                                                                                                                                                                                                                                                                                                                                          |  22,950,000   |
| 55       | DH-HAC-HDW1500TRQP-A-0280B-S2-S3<br>                                                                            | 5MP Starlight HDCVI Quick-to-install IR Eyeball Camera, 1/2.7" 5Megapixel CMOS<br>25/30 fps@5MP, 25/30fps@4MP, 1080P@25/30 fps, 3.6mm Fixed Lens<br>HD and SD output switchable, Support OSD Menu<br>DWDR, Day/Night(ICR), AWB, AGC, BLC, HLC, 2D-DNR,, Built-in Mic<br>Max. IR LEDs length 20m, Smart IR, IP50, DC12V                                                                                                                                                                                                                                                                                                                                                                                                 |  27,500,000  |
| 56       | DH-HAC-HDW1500TRQP-0280B-S3                                                                                                                                                                        | 5MP Starlight HDCVI Quick-to-install IR Eyeball Camera, 1/2.7" 5Megapixel CMOS<br>25/30 fps@5MP, 25/30fps@4MP, 1080P@25/30 fps, 3.6mm Fixed Lens<br>HD and SD output switchable, Support OSD Menu<br>DWDR, Day/Night(ICR), AWB, AGC, BLC, HLC, 2D-DNR<br>Max. IR LEDs length 20m, Smart IR, IP67, DC12V                                                                                                                                                                                                                                                                                                                                                                                                                |  24,600,000 |
| 57       | HAC-HDW1500CLQ-IL-A-S2<br>   | 5MP Smart Dual Light HDCVI Fixed-focal Quick-to-install Eyeball Camera<br><b>* In order to use the 5MP 16:9 and the Smart Dual Light HDCVI camera, the firmware of XVR must be upgraded to V4.001.0000004.1.R.220323 or later version.</b><br>5MP Progressive CMOS Sensor 2.8 mm: H: 106°; V: 56°; D: 125°<br>Max 25 fps@5MP (16:9 video output), CVI/CVBS/AHD/TVI switchable<br>DWDR, BLC, HLC, AWB, AGC, 2D DNR, Day/Night Auto(ICR)/Color/B/W, Smart Dual Light,<br>Illumination Distance IR: 20m (65.62 ft) Warm light: 20m (65.62 ft), Super Adapt, Built-in mic<br>Min. Illumination 0.05 lux@F1.6 (Color, 30 IRE) 0.005 lux@F1.6 (B/W, 30 IRE) 0 lux (Illuminator on)<br>12VDC, IP67, Plastic, Quick-to-install |  33,300,000 |
| 58       | HAC-T2A51-U-IL-A<br>         | 5MP Smart Dual Light HDCVI Fixed-focal Eyeball Camera<br>25 fps@5MP (16:9 video output), 2.8mm Lens H: 106°; V: 56°; D: 125°<br>Day/Night Auto(ICR), DWDR, BLCm HLCm AWB, AGC, 2D DNR, Smart Dual Light 30m<br>Min. Illumination 0.02 lux@F2.0 (Color, 30 IRE) 0.002 lux@F2.0 (B/W, 30 IRE) 0 lux (Illuminator on)<br>IP67, Built-in Mic, Quick-to-install, CVI/CVBS/AHD/TVI switchable, Casing Metal                                                                                                                                                                                                                                                                                                                  |  29,900,000 |
| 59       | HAC-T2A51P<br>                                                                                                   | 5MP HDCVI IR Eyeball Camera, 1/2.7" 5Megapixel CMOS<br>20fps@5MP, 25/30fps@4MP & @1080P (16:9 video output)<br>3.6mm & 2.8mm fixed lens<br>DWDR, Day/Night(ICR), AWB, AGC, BLC, HLC, 2DNR<br>HD and SD output switchable, Support OSD Menu<br>Max. IR length 20m, IP67, DC12V, Casing: Aluminium                                                                                                                                                                                                                                                                                                                                                                                                                       |  25,450,000 |






**توجه:** دستگاه های جدید XVR (به جز دستگاه های ستاره دار)، دوربین هایی که میکروفون داخلی (Built-in MIC) دارند را پشتیبانی نمی کند. لطفا در انتخاب محصول دقت نمایید.

| مدل ردیف                                                                                                                                                                                                       | مشخصات فنی                                                                                                                                                                                                                                                                                                                                                                         | تصویر                                                                                 | قیمت (ریال) |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|-------------|
| 60<br>HAC-T1A51P<br><b>Cooper Series</b>                                                                                                                                                                       | 5MP HDCVI IR Eyeball Camera, 1/2.7" 5Megapixel CMOS<br>20fps@5MP, 25/30fps@4MP, 25/30@1080P (16:9 video output)<br>3.6mm and 2.8mm fixed lens<br>DWDR, Day/Night(ICR), AWB, AGC, BLC, HLC, 2DNR<br>HD and SD output switchable, Support OSD Menu<br>Max. IR length 20m, IP67, DC12V, Casing: Plastic                                                                               |    | 21,300,000  |
| 61<br>DH-HAC-T2A41P<br><b>Cooper Series</b>                                                                                                                                                                    | 1/2.7" 4Megapixel CMOS, 25/30fps@4MP, 25/30fps@1080P<br>2.8mm fixed lens, HD and SD output switchable<br>Max. IR length 20m, IP67, DC12V, Casing: Aluminium                                                                                                                                                                                                                        |    | 22,400,000  |
| 62<br>DH-HAC-T1A41P<br><b>Cooper Series</b>                                                                                                                                                                    | 1/2.7" 4Megapixel CMOS, 25/30fps@4MP, 25/30fps@1080P<br>2.8mm fixed lens, HD and SD output switchable<br>Max. IR length 20m, DC12V, Casing: Plastic                                                                                                                                                                                                                                |    | 18,400,000  |
| 63<br>DH-HAC-HDW1239TLP-A-LED<br><br>          | 2M Full-color Starlight HDCVI Eyeball Camera<br>1/2.8 inch 2.16 Mega Pixels CMOS<br>Minimum Illumination:0.005Lux/F1.6<br>Full-color starlight<br>1080@25fps, 720@25fps, 720@50fps<br>3.6 mm fixed lens<br>DWDR, Day/Night(ICR), AWB, AGC, BLC, HLC, 2DNR<br>Smart Light, Electronic Defog<br>HCVI/CVBS/AHD/TVI switchable<br><b>Built-in Mic</b><br>20m LED distance, IP67, DC12V |    | 30,400,000  |
| 64<br>DH-HAC-HDW1230MP<br>                                                                                                     | 2MP Starlight HDCVI IR Eyeball Camera, 1/2.8" 2Megapixel CMOS<br>25/30fps@1080P, 25/30/50/60fps@720P, 3.6mm Fixed Lens<br>HD and SD output switchable, Support OSD Menu<br>DWDR, Day/Night(ICR), AWB, AGC, BLC, HLC, 2D-DNR<br>Max. IR LEDs length 30m, Smart IR, IP67, DC12V                                                                                                      |    | 20,050,000  |
| 65<br>HAC-HDW1209TLQP-A-LED-0280B<br><br> | 2MP Full-color HDCVI Quick-to-install Eyeball Camera<br>1/2.8 inch 2MP Progressive CMOS<br>Max. 30fps@1080P<br>2.8mm fixed lens<br><b>Built-in Mic</b><br>CVI/CVBS/AHD/TVI Switchable, Support OSD Menu<br>DWDR/BLC/AWB/AGC/2D DNR<br>20m LED Distance<br>Smart Light, IP67, DC12V                                                                                                 |   | 23,250,000  |
| 66<br>HAC-HDW1209TLQP-LED-0280B<br><br>   | 2MP Full-color HDCVI Quick-to-install Eyeball Camera<br>1/2.8 inch 2MP Progressive CMOS<br>Max. 30fps@1080P<br>2.8mm fixed lens<br>CVI/CVBS/AHD/TVI Switchable, Support OSD Menu<br>DWDR/BLC/AWB/AGC/2D DNR<br>20m LED Distance<br>Smart Light, IP67, DC12V                                                                                                                        |  | 20,200,000  |
| 67<br>DH-HAC-HDBW1200EP                                                                                                                                                                                        | 2MP HDCVI IR Dome Camera, 1/2.7" 2Megapixel CMOS<br>25/30fps@1080P, 25/30/50/60fps@720P, 2.8mm Fixed lens<br>HD and SD output switchable, Support OSD Menu<br>DWDR, Day/Night(ICR), AWB, AGC, BLC, HLC, 2D-DNR<br>Max. IR LEDs length 30m, Smart IR, IP67, IK10, DC12V                                                                                                             |  | 22,000,000  |
| 68<br>DH-HAC-HDW1200LP<br>                                                                                                  | 2MP HDCVI IR Eyeball Camera, 1/2.7" 2Megapixel CMOS<br>Max 30fps@1080P, 2.1mm fixed lens<br>HD and SD output switchable, <b>Built in Mic</b> , Support OSD Menu<br>DWDR, Day/Night(ICR), AWB, AGC, BLC, HLC, 2D-DNR<br>Max. IR LEDs length 3m, Smart IR, IP67, DC12V                                                                                                               |  | 26,100,000  |
| 69<br>DH-HAC-HDW1200MP                                                                                                                                                                                         | 1/2.7" 2Megapixel CMOS, 25/30fps@1080P, 50/60fps@720P<br>3.6mm fixed lens<br>HD and SD output switchable, Support OSD Menu<br>Day/Night(ICR), AWB, AGC, BLC, 2D-DNR<br>Max. IR length 30m, Smart IR, IP67, DC12V                                                                                                                                                                   |  | 18,800,000  |
| 70<br>DH-HAC-HDW1200EMP-A<br><b>Metal Case</b><br>                                                                          | 1/2.7" 2Megapixel CMOS, 25/30fps@1080P, <b>Built-in MIC</b><br>Day/Night(ICR), AWB, AGC, BLC, 2DNR, DWDR<br>3.6 & 2.8mm fixed lens<br>Max. IR LEDs length 50m, Smart IR, IP67, DC12V                                                                                                                                                                                               |  | 23,250,000  |
| 71<br>HAC-HDW1200TRQP-A-0280B-S6<br><br> | 2MP HDCVI Quick-to-install IR Eyeball Camera<br>1/2.7 inch Progressive CMOS<br>Max 30fps@2MP<br>2.8mm/3.6mm fixed lens<br><b>Built in Mic</b><br>CVI/TVI/AHD/CVBS Switchable, Support OSD Menu<br>DWDR/E-Defog/BLC/HLC/AWB/AGC/2D DNR/Day-Night Auto switch by ICR<br>Max. IR length 25m, Smart IR, IP50, DC12V                                                                    |  | 19,600,000  |

**توجه:** دستگاه های جدید XVR (به جز دستگاه های ستاره دار)، دوربین هایی که میکروفون داخلی (Built-in MIC) دارند را پشتیبانی نمی کند. لطفا در انتخاب محصول دقت نمایید.

| مدل ردیف                  | مشخصات فنی                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | تصویر                                                                                 | قیمت (ریال) |
|---------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|-------------|
| 72 DH-HAC-HDW1200TLP-A    |  <p>2MP HDCVI IR Eyeball Camera<br/>1/2.7 inch CMOS<br/>Max 30fps@1080P<br/>2.8mm Fixed lens<br/>DWDR, Day/Night(ICR), AWB, AGC, BLC, HLC, 2DNR<br/><b>Built-in mic</b><br/>Electronic Defog<br/>CVI/CVBS/AHD/TVI switchable<br/>Max. IR length 30m, Smart IR, IP67, DC12V</p>                                                                                                                                                                                                                                                                                                                                                                                                              |    | 20,600,000  |
| 73 HAC-HDW1200CLQ-IL-A-S6 |  <p>2MP Smart Dual Light HDCVI Fixed-focal Eyeball Camera<br/><b>* In order to use the Smart Dual Light HDCVI camera, the firmware of XVR must be upgraded to V4.001.0000004.1.R.220323 or later version.</b><br/>2 MP Progressive CMOS Sensor 2.8 mm: H: 102°; V: 60°; D: 129°<br/>Max. 30 fps@1080p, CVI/CVBS/AHD/TVI switchable<br/>DWDR, BLC, HLC, AWB, AGC, 3D DNR, Day/Night Auto(ICR)/Color/B/W, Smart Dual Light, Illumination Distance IR: 20m (65.62 ft) Warm light: 20m (65.62 ft), Super Adapt, Built-in mic, 1 Audio in<br/>Min. Illumination 0.01 lux@F2.0 (Color, 30 IRE) 0.001 lux@F2.0 (B/W, 30 IRE) 0 lux (Illuminator on)<br/>12VDC, IP67, Plastic, Quick-to-install</p> |    | 21,800,000  |
| 74 DH-HAC-T2A21P-U-A      |  <p><b>NEW</b></p> <p>2MP IR HDCVI Fixed-focal Eyeball Camera<br/>Max. 30 fps@1080p, 2.8 mm: H: 100°; V: 54°; D: 117°<br/>2 MP Progressive CMOS, HD/SD switchable<br/>Min. Illumination 0.02 lux@F2.0 (Color, 30 IRE) 0.002 lux@F2.0 (B/W, 30 IRE) 0 lux (Illuminator on)<br/><b>Built-in Mic</b>, Smart IR 30m, DWDR, BLC, 2D DNR, AWB, AGC<br/>IP67, 12 VDC, Metal Case</p> <p>Cooper Series</p>                                                                                                                                                                                                                                                                                          |    | 19,700,000  |
| 75 DH-HAC-T1A21P-U        | <p>2MP IR HDCVI Fixed-focal Eyeball Camera<br/>Max. 30 fps@1080p, 2MP Progressive CMOS Sensor, 2.8mm Fixed Lens<br/>CVI/CVBS/AHD/TVI switchable<br/>IR 25m, 0.02 lux@F2.0 (Color, 30 IRE)<br/>DWDR, AGC, AWB, 2D DNR, Smart IR, Day/Night ICR<br/>Quick-to-install eyeball</p> <p>Cooper Series</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |  | 14,400,000  |
| 76 DH-HAC-T2A21P          | <p>1/2.7" 2Megapixel CMOS, 25/30fps@1080P, 50/60fps@720P<br/>2.8mm fixed lens<br/>HD and SD output switchable, Support OSD Menu<br/>DWDR, Day/Night(ICR), AWB, AGC, BLC, HLC, 2DNR<br/>Max. IR length 20m, Smart IR, IP67, DC12V, Casing: Aluminium</p> <p>Cooper Series</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |  | 17,400,000  |
| 77 DH-HAC-T1A21P          | <p>1/2.7" 2Megapixel CMOS, 25/30fps@1080P, 50/60fps@720P<br/><b>2.8mm &amp; 3.6 fixed lens</b><br/>HD and SD output switchable, Support OSD Menu<br/>DWDR, Day/Night(ICR), AWB, AGC, BLC, HLC, 2DNR<br/>Max. IR length 20m, Smart IR, Casing: Plastic, DC12V</p> <p>Cooper Series</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |  | 13,800,000  |
| 78 HAC-PT1509A-A-LED      |  <p><b>NEW</b></p> <p>5MP Full-color HDCVI Fixed-focal PT Camera<br/>25 fps@5MP (16:9 video output), 2.8 mm: H: 111°; V: 57°; D: 131°<br/>Min. Illumination 0.001 lux@F1.0 (Color, 30IRE) 0 lux (Illuminator on)<br/>Pan &amp; Tilt, Smart Area Lighting, 40 m illumination, 24/7 color imaging, Super Adapt, Built-in Mic, Quick-to-install, 4x Digital Zoom<br/>WDR 120db, BLC, HLC, HLC Pro, AWB, AGC, 3D DNR, E-Defog, Smart Light<br/>IP66, 12 VDC, Plastic</p> <p>Full-color</p>                                                                                                                                                                                                    |  | 65,650,000  |
| 79 DH-SD59225I-HC-S2      | <p>1/2.8" 2Megapixel Exmor R CMOS (<b>Starlight</b>)<br/>Max 25/30fps @1080P &amp; 20/30/50/60fps @720P Resolution<br/>4.8mm ~ 120mm 25x optical zoom<br/>WDR (120db), Day/Night(ICR), Ultra DNR, Auto iris, Auto focus<br/>Max 400°/s pan speed, 360° endless pan rotation<br/>Control over coaxial cable<br/>1-channel BNC HDCVI/CVBS output (switchable)<br/>Up to 300 presets, 5 auto scan, 8 tour, 5 pattern<br/>Built-in 2/1 Alarm in/out, 1 Audio Input, RS485<br/>IR Distance up to 150m, IP66, OSD</p> <p>STARLIGHT</p>                                                                                                                                                                                                                                             |  | 286,950,000 |

**توجه:** دستگاه های جدید XVR (به جز دستگاه های ستاره دار)، دوربین هایی که میکروفون داخلی (**Built-in MIC**) دارند را پشتیبانی نمی کند. لطفا در انتخاب محصول دقت نمایید.

| مدل ردیف              | مشخصات فنی                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | تصویر                                                                                 | قیمت (ریال) |
|-----------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|-------------|
| 80 SD59230I-HC        | <p>2MP 30x Starlight IR PTZ HDCVI Camera, 1/2.8" Exmor R CMOS<br/>Max. 25/30fps @1080P(1920x1080) &amp; 50/60fps @720P Resolution<br/>4.5mm~135mm 30x optical zoom<br/>WDR(120dB), Day/Night(ICR), Ultra DNR, Auto iris, Auto focus<br/>Max 400°/s pan speed, 360° endless pan rotation<br/>HD and SD switchable<br/>Up to 300 presets, 5 auto scan, 8 tour, 5 pattern<br/>Audio(in/out) 1 / 1 , Built-in 2/1 Alarm in/out<br/>IR Distance up to 150m, IP66, OSD</p>                                                                                                                                                                              |    | 334,750,000 |
| 81 DH-SD49225I-HC-LA  | <p>2MP 25x Starlight IR PTZ HDCVI Camera, 1/2.8" STARVIS CMOS<br/>Max. 25/30fps @1080P(1920x1080) &amp; 50/60fps @720P Resolution<br/>4.8mm~120mm 25x optical zoom<br/>WDR(120dB), Day/Night(ICR), Ultra DNR, HLC, BLC, Auto iris, Auto focus<br/>Max 400°/s pan speed, 360° endless pan rotation<br/>Up to 300 presets, 5 auto scan, 8 tour, 5 pattern<br/>HD and SD switchable, 2/1 Alarm In/Out<br/>1CH Audio In, RS485, IR Distance up to 100m, IP66, OSD</p>                                                                                                                                                                                 |    | 268,100,000 |
| 82 DH-XVR1A04         | <p>4CH Penta-brid 1080N/720P Real-Time Cooper Recorder<br/>H.264 video compression, 4CH: 1/4 Playback<br/>Pentabrid (IP+CVI+AHD+TVI+CVBS) N+M [4+1 IP up to 2 MP(20 Mbps)]<br/>1 Audio Input / 1 Audio Output, 1 SATA Port , Up to 8 TB<br/>HDMI , VGA ,simultaneous video Output<br/>2*USB 2.0, 10/100 Mbps LAN Interface, P2P Support</p>                                                                                                                                                                                                                                                                                                       |    | 31,650,000  |
| 83 XVR1B04-I          | <p>4 Channel Penta-brid 1080N/720p Real-time WizSense Ai XVR<br/>H.265+/H.265/H.264+/H.264 dual-stream video compression<br/>Pentabrid (IP+CVI+AHD+TVI+CVBS) N+M [4+1 IP up to 2MP(20 Mbps),<br/>4CH: 1/4 Playback<br/>HDMI , VGA ,simultaneous video Output<br/>1 SATA port, up to 6 TB capacity<br/>2*USB 2.0, 10/100 Mbps LAN Interface, P2P Support<br/>SMD Plus, Full channel AI-Coding, Human/Vehicle Classification</p>                                                                                                                                                                                                                    |    | 38,200,000  |
| 84 DH-XVR1A08         | <p>8CH Penta-brid 1080N/720P noneReal-Time Cooper Recorder<br/>H.264 video compression, 8CH:1/4/9 Playback<br/>Pentabrid (IP+CVI+AHD+TVI+CVBS) N+M [8+2 IP up to 5 MP(40 Mbps)]<br/>1 Audio Input / 1 Audio Output, 1 SATA Port , Up to 8 TB<br/>HDMI , VGA ,simultaneous video Output, 2*USB 2.0<br/>10/100 Mbps LAN Interface, P2P Support</p>                                                                                                                                                                                                                                                                                                  |   | 38,850,000  |
| 85 XVR1B08-I          | <p>8 Channel Penta-brid 1080N/720p Real-time WizSense Ai XVR<br/>H.265+/H.265/H.264+/H.264 dual-stream video compression<br/>Pentabrid (IP+CVI+AHD+TVI+CVBS) N+M [8+2 IP up to 6MP(40 Mbps),<br/>4CH: 1/4/9 Playback<br/>HDMI , VGA ,simultaneous video Output<br/>1 SATA port, up to 6 TB capacity<br/>2*USB 2.0, 10/100 Mbps LAN Interface, P2P Support<br/>4ch SMD Plus, Full channel AI-Coding, Human/Vehicle Classification</p>                                                                                                                                                                                                              |  | 46,400,000  |
| 86 XVR1B08H-I         | <p>8 Channels 5M-N/1080p Cooper 1U 1HDD Digital Video Recorder<br/>Supports Full-channel AI-Coding , H.265+/H.265 dual-stream<br/>Pentabrid (IP+CVI+AHD+TVI+CVBS) - Max 12 channels IP camera inputs<br/>Up to 8 channels SMD Plus Human/Vehicle Classification<br/>Encoding Capacity : 5M-N@(10 fps); 4M-N/1080p@(15 fps); 1080N@(25/30 fps)<br/>1/4/8/9 Playback , 1 SATA port, up to 16 TB capacity<br/>2*USB 2.0, Audio In/Out : 1/1 , 10/100 Mbps LAN Interface, P2P Support</p>                                                                                                                                                             |  | 79,750,000  |
| 87 XVR5104HS-I3(V3.0) | <p>New GUI V4.0 Support - 4 Channel Penta-brid 5M-N/1080p None Real-Time WizSense Ai XVR<br/>5M-N; 4M-N; 1080p; 1080N; 720p; 960H; D1; CIF<br/>H.265+/H.265/H.264+/H.264 dual-stream video compression<br/>Pentabrid (IP+CVI+AHD+TVI+CVBS) N+M [4+2 IP up to 6MP(32 Mbps)<br/>HDMI/VGA Simultaneous Video Output, 1ch Audio I/O<br/>Playback 1/4ch<br/>1 SATA Port up to 6 TB capacity<br/>2*USB 2.0, RS485, 10/100 Mbps LAN Interface, P2P Support<br/>1ch Perimeter(Tripwire/Intrusion) 10 IVS each channel, 1ch FaceRecognition up to 10,000 Face Library, 4ch SMD Plus, Full channel AI-Coding, Human/Vehicle Classification, IoT Support</p> |  | 64,200,000  |

**توجه:** دستگاه های جدید XVR(به جز دستگاه های ستاره دار)، دوربین هایی که میکروفون داخلی (Built-in MIC) دارند را پشتیبانی نمی کند. لطفا در انتخاب محصول دقت نمایید.

| مدل ردیف | مشخصات فنی                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | تصویر                                                                                 | قیمت (ریال) |
|----------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|-------------|
| 88       | <p>XVR5104HS-4KL-I3(V3.0)</p> <p><b>4K</b></p> <p><b>Wiz Sense AI</b></p> <p>New GUI V4.0 Support - 4 Channel Penta-brid 4K WizSense Ai XVR<br/> 4K@7fps, 6MP@10fps, 5MP@12fps, 4MP@15fps, 4MN/1080p/720p@25/30fps<br/> H.265+/H.265/H.264+/H.264 dual-stream video compression<br/> Pentabrid (IP+CVI+AHD+TVI+CVBS)N+M 4+4 IP up to 8MP(64 Mbps)<br/> HDMI/VGA Simultaneous Video Output, 1ch Audio I/O<br/> Playback 1/4ch<br/> 1 SATA Port up to 10 TB capacity<br/> 2*USB 2.0, RS485, 10/100 Mbps LAN Interface, P2P Support<br/> 1ch Perimeter(Tripwire/Intrusion) 10 IVS each channel, 1ch FaceRecognition up to 10,000 Face Library, 4ch SMD Plus, Full channel AI-Coding, Human/Vehicle Classification, IoT Support</p>                                                                                                                                                                                         |    | 94,050,000  |
| 89       | <p>XVR5108HS-4KL(V.2)</p> <p><b>AI</b></p> <p>New GUI V4.0 Support - 8CH Penta-brid 4K Recorder<br/> HDCVI 4K, AHD,5mp, HDTV 5MP 8+4ch support<br/> H.264+/H.264 dual-stream video compression<br/> Pentabrid (IP+CVI+AHD+TVI+CVBS) N+M [8+4 IP up to 8MP<br/> Tripwire, Intrusion, Face Detection, Smart Search<br/> 1/1 Audio In/Out, 1 SATA Port , Up to 8TB<br/> 1*HDMI, 1*VGA ,simultanous video Output<br/> 2*USB 2.0, 1*10/100 Mbps LAN Interface , P2P Support</p>                                                                                                                                                                                                                                                                                                                                                                                                                                              |    | 133,900,000 |
| 90       | <p>XVR5108HS-I3(V3.0)</p> <p><b>Wiz Sense AI</b></p> <p>New GUI V4.0 Support - 8 Channel Penta-brid 5M-N/1080p None Real-Time WizSense Ai XVR<br/> 5M-N; 4M-N; 1080p; 1080N; 720p; 960H; D1; CIF<br/> H.265+/H.265/H.264+/H.264 dual-stream video compression<br/> Pentabrid (IP+CVI+AHD+TVI+CVBS) N+M 8+4 IP up to 6MP(64 Mbps)<br/> HDMI/VGA Simultaneous Video Output, 1ch Audio I/O<br/> Playback 1/4/9ch<br/> 1 SATA Port up to 10 TB capacity<br/> 2*USB 2.0, RS485, 10/100 Mbps LAN Interface, P2P Support<br/> 1ch Perimeter(Tripwire/Intrusion) 10 IVS each channel, 1ch FaceRecognition up to 10,000 Face Library, 8ch SMD Plus, Full channel AI-Coding, Human/Vehicle Classification, IoT Support</p>                                                                                                                                                                                                        |    | 92,500,000  |
| 91       | <p>XVR5108HS-4KL-I2</p> <p><b>4K</b></p> <p><b>Wiz Sense AI</b></p> <p>New GUI V4.0 Support - 8 Channel Penta-brid 4K-N/5MP WizSense Ai XVR<br/> 4K@7fps, 6MP@10fps, 5MP@12fps, 4K-N/4MP@15fps, 4MN/1080p/720p@25/30fps<br/> H.265+/H.265/H.264+/H.264 dual-stream video compression<br/> Pentabrid (IP+CVI+AHD+TVI+CVBS)N+M 8+8 IP up to 8MP(128 Mbps)<br/> HDMI/VGA Simultaneous Video Output, 1ch Audio I/O<br/> Playback 1/4/9ch<br/> 1 SATA Port up to 10 TB capacity<br/> 1*USB 2.0, 1*USB 3.0, RS485, 1*1000 Mbps LAN Interface, RS485, P2P Support<br/> 2ch Perimeter(Tripwire/Intrusion) 10 IVS each channel, 2ch FaceRecognition up to 20,000 Face Library, 8ch SMD Plus, Human/Vehicle Classification, IoT Support</p>                                                                                                                                                                                       |  | 156,250,000 |
| 92       | <p>XVR5108HS-4KL-I3(V2.0)</p> <p><b>Wiz Sense AI</b></p> <p>New GUI V4.0 Support - 8 Channels Penta-brid 4K-N/5MP<br/> Encode Capacity All channel 4K@ (7 fps); 6MP@ (10 fps); 5MP@ (12 fps); 4K-N/4 MP/3 MP@ (15 fps); 4M-N/1080P @ (25/30fps);<br/> AI Coding/H.265+/H.265 dual-stream video compression<br/> Supports HDCVI/AHD/TVI/CVBS<br/> Up to 16 channels of IPC access / 128 Mbps<br/> Supports Full-channel AI Coding<br/> Perimeter Protection : 8 channels, 10 IVS for each channel / 2 channels (up to 12 face images/s) / Face Recognition : 2 channel up to 10 face databases / Full-channel SMD Plus<br/> Audio Input : 1, RCA (external) 8, BNC (coaxial) / Audio Output 1, RCA<br/> HDD Interface 1 SATA Port, up to 16TB<br/> RS-485 : 1 Port / 2 USB Ports / HDMI / VGA / Network Port 10/100/1000<br/> DC12V, 2A / Power Consumption Lower than 10 W / Operating Temperature -10 °C to +55 °C</p> |  | 156,250,000 |
| 93       | <p>DH-XVR1B16</p> <p><b>Cooper Series</b></p> <p>16CH Penta-brid 1080N/720P None Real-Time Cooper Recorder<br/> H.265+/H.265 dual-stream video compression<br/> 1st channel 1080N/720P@25fps, others 1080N/720P@15fps<br/> 16CH: 1/4/9/16 Playback<br/> Pentabrid (IP+CVI+AHD+TVI+CVBS) N+M [16+2 IP up to 6 MP(64 Mbps)]<br/> 1 Audio Input / 1 Audio Output, 1 SATA Port , Up to 6 TB<br/> HDMI , VGA ,simultanous video Output<br/> 2 USB 2 , 10/100 Mbps LAN Interface, P2P Support</p>                                                                                                                                                                                                                                                                                                                                                                                                                             |  | 76,650,000  |

**توجه:** دستگاه های جدید XVR (به جز دستگاه های ستاره دار)، دوربین هایی که میکروفون داخلی (Built-in MIC) دارند را پشتیبانی نمی کند. لطفا در انتخاب محصول دقت نمایید.

| مدل ردیف | مشخصات فنی                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | تصویر                                                                                 | قیمت (ریال) |
|----------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|-------------|
| 94       | <p>Wiz Sense AI</p> <p>XVR1B16-I(V.2.0)</p> <p>Cooper Series</p> <p>8 Channel Penta-brid 1080N/720p Real-time WizSense Ai XVR<br/>H.265+/H.265/H.264+/H.264 dual-stream video compression<br/>Pentabrid (IP+CVI+AHD+TVI+CVBS) N+M [16+2 IP up to 6MP(64 Mbps)<br/>4CH: 1/4/9/16 Playback<br/>HDMI/VGA Simultaneous Video Output<br/>1 SATA port, up to 6 TB capacity<br/>2*USB 2.0, 10/100 Mbps LAN Interface, P2P Support<br/>8ch SMD Plus, Full channel AI-Coding, Human/Vehicle Classification</p>                                                                                                                                                                                                                                                        |    | 93,850,000  |
| 95       | <p>Wiz Sense AI</p> <p>XVR5116H-I2</p> <p>New GUI V4.0 Support - 16 Channel Penta-brid 5M-N/1080P WizSense Ai XVR<br/>5MN@10fps, 4MN/2MP@15fps, 2MN/1MP@25/30fps<br/>H.265+/H.265/H.264+/H.264 dual-stream video compression<br/>Pentabrid (IP+CVI+AHD+TVI+CVBS)N+M 16+4 IP up to 6MP(128 Mbps)<br/>HDMI/VGA Simultaneous Video Output, 1ch Audio I/O<br/>Playback 1/4/9/16ch<br/>1 SATA Port up to 10 TB capacity<br/>1*USB 2.0, 1*USB 3.0, RS485, 1*1000 Mbps LAN Interface, RS485, P2P Support<br/>2ch Perimeter(Tripwire/Intrusion) 10 IVS each channel, 2ch FaceRecognition up to 10,000 Face Library, 16ch SMD Plus, Human/Vehicle Classification, IoT Support</p>                                                                                     |    | 161,100,000 |
| 96       | <p>XVR5116HS-S2(V.2)</p> <p>New GUI V4.0 Support - 16 Channel Penta-brid 5M-N/1080P XVR<br/>5MN, 4M-N, 1080P, 1080N, 720P, 960H, D1, HD1, BCIF, CIF, QCIF<br/>H.264+/H.264 dual-stream video compression<br/>Pentabrid (IP+CVI+AHD+TVI+CVBS)N+M 16+8 IP up to 5MP(96 Mbps)<br/>HDMI/VGA Simultaneous Video Output, 1ch Audio I/O<br/>Playback 1/4/9/16ch<br/>1 SATA Port, up to 8TB capacity<br/>1 USB 2.0 , 1 USB 3.0, RS485, 1*1000 Mbps LAN Interface, RS485, P2P Support<br/>Tripwire, Intrusion, Face Detection</p>                                                                                                                                                                                                                                     |    | 138,300,000 |
| 97       | <p>Wiz Sense AI</p> <p>XVR5116HS-I3</p> <p>New GUI V4.0 Support - 16 Channel Penta-brid 5M-N/1080P<br/>Encode Capacity All channel 5M-N (10 fps); 4M-N/1080p (15fps)<br/>AI Coding/H.265+/H.265 dual-stream video compression<br/>Supports HDCVI/AHD/TVI/CVBS/IP video inputs<br/>Max 24 channels IP camera, up to 6MP; Max 128Mbps incoming bandwidth<br/>Supports Full-channel AI Coding / 16 channel SMD / 2 channel face recognition<br/>Audio Input : 1, RCA (external) 16, BNC (coaxial) / Audio Output 1, RCA<br/>HDD Interface 1 SATA Port, up to 16TB for a single HDD<br/>RS-485 : 1 Port / 2 USB Ports / HDMI / VGA / Network Port 10/100/1000<br/>DC12V, 2A / Power Consumption Lower than 12 W / Operating Temperature<br/>-10 °C to +55 °C</p> |  | 161,100,000 |
| 98       | <p>XVR5216AN-S2(V.2)</p> <p>New GUI V4.0 Support - 16CH Penta-brid 5MN/4M-N/1080P Non-real Time ,<br/>1080N/720P Real-Time Recorder, 5MN/4M-N/1080P@15fps , 1080N/720P@25fps<br/>H.264+/H.264 dual-stream video compression<br/>1/4/9/16CH Playback, Pentabrid (IP+CVI+AHD+TVI+CVBS) N+M [16+8 IP up to 5 MP(96 Mbps)]<br/>Support Smart Search and Intelligent Video System<br/>1/1 Audio In/Out, 2 SATA Port , Up to 16 TB<br/>HDMI , VGA ,simultaneous video Output, RS485 for PTZ support<br/>2 USB Ports (1 USB 2.0 , 1 USB 3.0)<br/>10/100/1000 Mbps LAN Interface, P2P Support</p>                                                                                                                                                                    |  | 179,400,000 |
| 99       | <p>Wiz Sense AI</p> <p>XVR5216AN-I2</p> <p>New GUI V4.0 Support - 16 Channel Penta-brid 5M-N/1080P WizSense Ai XVR<br/>5MN@10fps, 4MN/2MP@15fps, 2MN/1MP@25/30fps<br/>H.265+/H.265/H.264+/H.264 dual-stream video compression<br/>Pentabrid (IP+CVI+AHD+TVI+CVBS)N+M 16+4 IP up to 6MP(128 Mbps)<br/>HDMI/VGA Simultaneous Video Output, 1ch Audio I/O<br/>Playback 1/4/9/16ch<br/>2 SATA Port up to 10 TB capacity each port(20TB Total)<br/>1*USB 2.0, 1*USB 3.0, RS485, 1*1000 Mbps LAN Interface, RS485, P2P Support<br/>2ch Perimeter(Tripwire/Intrusion) 10 IVS each channel, 2ch FaceRecognition up to 10,000 Face Library, 16ch SMD Plus, Human/Vehicle Classification, IoT Support</p>                                                              |  | 206,650,000 |

**توجه:** دستگاه های جدید XVR(به جز دستگاه های ستاره دار)، دوربین هایی که میکروفون داخلی (Built-in MIC) دارند را پشتیبانی نمی کند. لطفا در انتخاب محصول دقت نمایید.

| مدل ردیف                      | مشخصات فنی                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | تصویر                                                                                 | قیمت (ریال) |
|-------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|-------------|
| 100 XVR5216AN-I3              | <p>New GUI V4.0 Support - 16 Channel Penta-brid 5M-N/1080P<br/> Encode Capacity All channel 5M-N (10 fps); 4M-N/1080p (15fps)<br/> AI Coding/H.265+/H.265 dual-stream video compression<br/> Supports HDCVI/AHD/TVI/CVBS<br/> 16+8 channels,each IP Channel up to 6MP<br/> Supports Full-channel AI Coding<br/> Perimeter Protection : 2 channel, 10 IVS for each channel / Face Detection : 6 attributes ,<br/> 2 channels each channel up to 12 faces / Face Recognition : 2 channel up to 10 face<br/> databases / Full-channel SMD Plus<br/> Audio Input : 1, RCA (external) 16, BNC (coaxial) / Audio Output 1, RCA<br/> HDD Interface 2 SATA Port, up to 16TB for a single HDD<br/> RS-485 : 1 Port / 2 USB Ports / HDMI / VGA / Network Port 10/100/1000<br/> DC12V, 2A / Power Consumption Lower than 12 W / Operating Temperature<br/> -10 °C to +55 °C</p>                                                                |    | 206,650,000 |
| 101 XVR5216AN-4KL-I2          | <p>New GUI V4.0 Support - 16 Channel Penta-brid 4KN/5MP WizSense Ai XVR<br/> 4K@7fps, 6MP@10fps, 5MN@12fps, 4KN/4MP@15fps, 4MN/2MP/1MP@25/30fps<br/> H.265+/H.265/H.264+/H.264 dual-stream video compression<br/> Pentabrid (IP+CVI+AHD+TVI+CVBS)N+M 16+16 IP up to 8MP(128 Mbps)<br/> HDMI/VGA Simultaneous Video Output, 1ch Audio I/O<br/> Playback 1/4/9/16ch<br/> 2 SATA Port up to 10 TB capacity each port(20TB Total)<br/> 1*USB 2.0, 1*USB 3.0, RS485, 1*1000 Mbps LAN Interface, RS485, P2P Support<br/> 2ch Perimeter(Tripwire/Intrusion) 10 IVS each channel, 2ch FaceRecognition up to<br/> 20,000 Face Library, 16ch SMD Plus, Human/Vehicle Classification, IoT Support</p>                                                                                                                                                                                                                                          |    | 312,750,000 |
| 102 DH-XVR5216AN-4KL          | <p>New GUI V4.0 Support - 16 Channel Embedded Processor<br/> 16+8 Channel, each channel up to 8M<br/> HDCV 4K, 4MP, 1080P@25/30fps, 720P@50/60fps, 720P@25/<br/> Record rate Main stream: 4K(1~7fps);4MP(1~15fps);1080P (1~25/30f)<br/> H.264+/H.26 dual-stream video compression<br/> Internal HDD 2 SATA Ports, up to 8TB capacity for each<br/> IP Camera Input 8+4/16+8 Channel, each channel up to 8<br/> Audio In/Out 1/1, RC - 2 USB Ports (1 USB 2.0 , 1 USB 3), 1*RS485, 1*1000 Mbps</p>                                                                                                                                                                                                                                                                                                                                                                                                                                   |    | 269,550,000 |
| 103 DH-XVR5216AN-4KL-I3(V2.0) | <p>New GUI V4.0 Support - 16 Channels Penta-brid 4K-N/5MP<br/> Encode Capacity All channel 4K@(7fps); 6MP@(10fps); 5MP@(12fps); 4K-<br/> N/4MP/3MP@(15fps); 4M-N/1080P(25/30fps);<br/> AI Coding; H.265+; H.265; H.264+; H.264<br/> Supports HDCVI/AHD/TVI/CVBS/IP video inputs.<br/> Max 32 channels IP camera inputs, each channel up to 8MP<br/> Supports Full-channel AI Coding<br/> Perimeter Protection : Advanced Model: 2 channels , General Model: 8 channels ; Face<br/> Detection : 2 channels ;Face Recognition : 2 channels , Up to 10 face databases , SMD<br/> Plus : 16 channels<br/> Audio Input :1-channel RCA , 16-channel BNC 16 / Audio Output 1, RCA<br/> HDD Interface 2 SATA Port, up to 16TB for a single HDD<br/> RS-485 : 1 Port / 2 USB Ports / HDMI / VGA / Network Port 10/100/1000<br/> 12 VDC, 5A / Power Consumption Lower than 15 W(without HDD) / Operating<br/> Temperature-10 °C to +55 °C</p> |  | 312,750,000 |
| 104 DH-XVR5232AN-S2(V.2)      | <p>New GUI V4.0 Support - 32CH Penta-brid 1080P Recorder<br/> 4M-N/1080P@15fps, 1080N/720P@25fps<br/> H.264+/H.264 dual-stream video compression<br/> 16CH Playback<br/> Pentabrid (IP+CVI+AHD+TVI+CVBS)[32 IP up to 5 MP(128 Mbps)]<br/> Support Smart Search and Intelligent Video System<br/> 1/1 Audio In/Out, 2 SATA Port , Up to 16 TB<br/> 1*HDMI, 1*VGA ,simultaneous video Output<br/> RS485 for PTZ support, 2*USB(1 USB2.0 , 1 USB3.0)<br/> 1*10/100/1000 Mbps LAN Interface, P2P Support</p>                                                                                                                                                                                                                                                                                                                                                                                                                            |  | 288,600,000 |

**توجه:** دستگاه های جدید XVR(به جز دستگاه های ستاره دار)، دوربین هایی که میکروفون داخلی (Built-in MIC) دارند را پشتیبانی نمی کند. لطفا در انتخاب محصول دقت نمایید.

| مدل ردیف               | مشخصات فنی                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | تصویر                                                                                 | قیمت (ریال) |
|------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|-------------|
| 105 XVR5232AN-I2       | <p>New GUI V4.0 Support - 32 Channel Penta-brid 5M-N/1080P WizSense Ai XVR<br/>5MN@10fps, 4MN/2MP@15fps, 2MN/1MP@25/30fps<br/>H.265+/H.265/H.264 dual-stream video compression<br/>Pentabrid (IP+CVI+AHD+TVI+CVBS)N+M 32ch IP up to 6MP(128 Mbps)<br/>HDMI/VGA Simultaneous Video Output, 1ch Audio I/O<br/>Playback 1/4/9/16ch<br/>2 SATA Port up to 10 TB capacity each port(20TB Total)<br/>1*USB 2.0, 1*USB 3.0, RS485, 1*1000 Mbps LAN Interface, RS485, P2P Support<br/>2ch Perimeter(Tripwire/Intrusion) 10 IVS each channel, 2ch FaceRecognition up to 10,000 Face Library, 16ch SMD Plus, Human/Vehicle Classification, IoT Support</p>                                                                                                                                                                                                  |    | 334,150,000 |
| 106 XVR5232AN-I3(V2.0) | <p>New GUI V4.0 Support - 32 Channels Penta-brid 5M-N/1080P<br/>Encode Capacity All channels 5M-N@(10fps); 4M-N/1080P@(15fps)<br/>AI Coding/H.265+/H.265 dual-stream video compression<br/>Supports HDCVI/AHD/TVI/CVBS<br/>32 IP channels, up to 6MP / bandwidth: 128 Mbps<br/>Supports 16-channel AI Coding<br/>Perimeter Protection : Up to 4 channels 10 IVS for each channel / Face Detection : 2 channels (up to 12 face images/s) / Face Recognition : Up to 2 channels, Up to 10 face databases /16 channels SMD Plus)<br/>Audio Input : 1, RCA (external) 32, BNC (coaxial) / Audio Output 1, RCA<br/>HDD Interface 2 SATA Port, up to 16TB for a single HDD<br/>RS-485 : 1 Port / 2 USB Ports / HDMI / VGA / Network Port 10/100/1000<br/>DC12V, 5A / Power Consumption Lower than 17 W / Operating Temperature<br/>-10 °C to +55 °C</p> |    | 334,150,000 |
| 107 XVR5432L-I3        | <p>32 Channels Penta-brid 5M-N/1080P 4HDDs WizSense Digital Video Recorder<br/>H.265+/H.265 dual-stream video compression.<br/>Supports 16-channel AI-Coding.<br/>Supports HDCVI/AHD/TVI/CVBS/IP video inputs.<br/>Max 32 channels IP camera, each channel up to 8MP; 128 Mbps bandwidth.<br/>Up to 8 channels video stream (analog channel) perimeter protection.<br/>Up to 16 channels video stream (analog channel) SMD plus.<br/>Up to 2 channels video stream (analog channel) human face recognition.<br/>Perimeter Protection, Face Detection, Face Recognition : Up to 10 face databases with 10,000 face images, SMD Plus<br/>Multi-screen Display 1/4/8/9/16/25/36<br/>IoT &amp; POS functionalities.</p>                                                                                                                               |   | 550,000,000 |
| 108 DH-XVR4232AN-I     | <p>32 Channels Penta-brid 1080N/720P 1U 2HDDs WizSense Digital Video Recorder<br/>Video Compression AI Coding; H.265+; H.265; H.264+; H.264<br/>Supports 8-channel AI-Coding.<br/>Supports HDCVI/AHD/TVI/CVBS/IP video inputs.<br/>Max 16 channels IP camera inputs, each channel up to 6MP; Max 128 Mbps incoming bandwidth. Multi-screen Display 1/4/8/9/16/25/36<br/>Audio Input 1-channel RCA (external)32-channel BNC (coaxial audio)<br/>Two-way Talk, HDD Interface 2 SATA ports, up to 16 TB<br/>Up to 16 channels video stream (analog channel) SMD Plus.<br/>Long transmission distance over coax cable.</p>                                                                                                                                                                                                                            |  | 223,200,000 |

**توجه:** دستگاه های جدید XVR (به جز دستگاه های ستاره دار)، دوربین هایی که میکروفون داخلی (Built-in MIC) دارند را پشتیبانی نمی کند. لطفا در انتخاب محصول دقت نمایید.

| مدل ردیف                  | مشخصات فنی                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | تصویر                                                                                 | قیمت (ریال) |
|---------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|-------------|
| 1 PSD81602-A360           | 8x2MP Multi-Sensor Panoramic Network Camera+PTZ Camera<br>Panoramic: Eight 1/1.9" 2Megapixel progressive scan CMOS<br>5mm fixed lens<br>PTZ: One 1/1.9" 2Megapixel progressive scan CMOS<br>5.5mm~206mm, 37x optical zoom<br>H.265+/H.265/H.264+/H.264 triple-stream encoding<br>2x25fps@4096x1800+50/60fps@1080P<br>Support 360-degree panoramic view<br>WDR, Day/Night(ICR), 3DNR, AWB, AGC, HLC, BLC<br>Smart tracking, Intelligent Function(Tripwire, Intrusion)<br>2/1 channel Audio In/Out, 7/2 channel Alarm In/Out<br>RS485, Micro SD memory, IP67, IK10                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |    | Call        |
| 2 PSD8802-A180            | 4x2MP Multi-Sensor Panoramic Network Camera+PTZ Camera<br>Panoramic: Four 1/1.9" 2Megapixel progressive scan CMOS<br>5mm fixed lens<br>PTZ: One 1/1.9" 2Megapixel progressive scan CMOS<br>5.5mm~206mm, 37x optical zoom<br>H.265+/H.265/H.264+/H.264 triple-stream encoding<br>25fps@4096x1800+50/60fps@1080P<br>Support 180-degree panoramic view<br>WDR, Day/Night(ICR), 3DNR, AWB, AGC, HLC, BLC<br>Smart tracking, Intelligent Function(Tripwire, Intrusion)<br>2/1 channel Audio In/Out, 7/2 channel Alarm In/Out<br>RS485, Micro SD memory, IP67, IK10                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |    | Call        |
| 3 SDT4E425-4F-GB-A-PV1    | X-Spans 4MP+4MP 25x TiOC WizSense Network PTZ Camera<br>Panorama: 1/2.8" 4Megapixel F1.0 CMOS<br>Detail: 1/2.8"4Megapixel STARVIS™ CMOS<br>25x optical zoom, Max. 25/30fps@4M, IR distance up to 100 m<br>Active deterrence, Auto tracking 3.0, Smart tracking, Perimeter protection, Smart dual light +<br>Panorama: 0.001 lux@F1.0 (Color, 30 IRE); 0.0005 lux@F1.0 (B/W, 30 IRE); 0 lux (illuminator on);<br>Detail: 0.005 lux@F1.6 (Color, 30 IRE); 0.0005 lux@F1.6 (B/W, 30 IRE); 0 lux (illuminator on)<br>FoV Panorama: H: 101° Detail: H: 51.9°, Auto Focus<br>Preset 300, Tour 8, Pattern 5, Scan 5<br>SMD 4.0, Quick Pick, Tripwire; intrusion; climbing fences; loitering detection; abandoned/missing object; fast moving;<br>parking detection; people gathering; vehicle/human alarm classification; linking the detail camera to track objects<br>Light Warning, Sound Warning<br>3 Streams, H.265+, WDR 120db, HLC, BLC, AWB, AGC, 3D DNR, Rol, EIS, Defog<br>Micro SD 512GB, Audio I/O 1/1, Alarm I/O 2/1<br>12VDC, PoE+, TVS 6000 V lightning proof;IP66; surge protection; voltage transient protection |   | 520,300,000 |
| 4 IPC-PFW3849S-A180-AS-PV | 2x4MP TiOC Duo Splicing Fixed-focal Bullet WizSense Network Camera<br>Dual 1/2.7" Progressive CMOS Sensor, 2.8mm Fixed Lens<br>Outputs 180° wide angle splicing image, max. 8 MP (4096 × 1860)@20 fps<br>H.265 codec, high compression rate, ultra-low bit rate, 3 Streams<br>IR 25m, Warmlight 20m, 0.005 lux@F1.4 (Color, 30 IRE) 0.0005 lux@F1.4 (B/W, 30 IRE) 0 lux (illuminator on)<br>WDR 120db, SSA, 3D NR, HLC, BLC, AGC, AWB, 3D DNR, Rol,<br>Micro SD 256GB, Audio I/O 1/1, Alarm I/O 1/1, <b>Dual Mic, Speaker, Two Way Talk</b><br>EPTZ, SMD 4.0, arm & disarm option, Intrusion, tripwire, Quick Pick,<br>Sound Warning, Light Warning(Red and Blue Light)<br>12VDC, IP67, Metal Case                                                                                                                                                                                                                                                                                                                                                                                                                         |  | 215,300,000 |
| 5 PFW8800-A180            | 4x2MP Multi-Sensor Panoramic Network IR Bullet Camera<br>Four 1/2.8" 2Megapixel progressive scan STARVIS™ CMOS<br>H.265+/H.265/H.264+/H.264 triple-stream encoding<br>Max 25fps@4096x1800, 3.0mm fixed lens<br>Support 180-degree panoramic view<br>DWDR, Day/Night(ICR), 3DNR, AWB, AGC, HLC, BLC<br>Intelligent Function Tripwire, Intrusion, Object Abandoned/Missing, Heat Map, E-PTZ<br>1/1 channel Audio In/Out, 2/2 channel Alarm In/Out<br>Max. IR LEDs length 30m, Micro SD memory, IP67, IK10,PoE+                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |  | Call        |
| 6 PFW8601-A180            | 3x2MP Multi-Sensor Panoramic Network IR Bullet Camera<br>Three 1/2.8" 2Megapixel progressive scan STARVIS™ CMOS<br>H.265+/H.265/H.264+/H.264 triple-stream encoding<br>Max 25fps@4096x832, 3.6mm fixed lens, Support 180-degree panoramic view<br>WDR, Day/Night(ICR), 3DNR, AWB, AGC, HLC, BLC<br>Intelligent Function Tripwire, Intrusion, Object Abandoned/Missing, Heat Map, E-PTZ<br>1/1 channel Audio In/Out, 2/1 channel Alarm In/Out<br>Max. IR LEDs length 30m, Micro SD memory, IP67, IK10,PoE+                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |  | Call        |
| 7 PDBW8800-A180           | 4x2MP Multi-Sensor Panoramic Network IR Dome Camera<br>Four 1/2.8" 2Megapixel progressive scan STARVIS™ CMOS<br>H.265+/H.265/H.264+/H.264<br>Max 25fps@4096x1800, 3.0mm fixed lens<br>Support 180-degree panoramic view<br>DWDR, Day/Night(ICR), 3DNR, AWB, AGC, HLC, BLC<br>Intelligent Function Tripwire, Intrusion, Object Abandoned/Missing, Heat Map, E-PTZ<br>1/1 channel Audio In/Out, 2/1 channel Alarm In/Out<br>Max. IR LEDs length 30m, Micro SD memory, IP67, IK10,PoE+                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |  | Call        |

| مدل ردیف               | مشخصات فنی                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | تصویر                                                                                 | قیمت (ریال) |
|------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|-------------|
| 8 IPC-EBW8842-AS       | <p>8MP IR Fisheye WizMind Network Camera</p> <p>8MP 1/1.7" CMOS image sensor, low luminance, and high definition image</p> <p>Min. Illumination 0.01 Lux@F2.0 (Color, 30 IRE), 0.001 Lux@F2.0 (B/W, 30 IRE), 0 Lux (Illuminator on)</p> <p>Focal Length 1.85mm, Field of View Horizontal: 185°; Vertical: 180°</p> <p>Outputs max. 8M (3280 × 2480) @25/30 fps</p> <p>Built-in IR LED, and the max. illumination distance is 10 m</p> <p>IVS: Intrusion, tripwire, heat map, people counting, Smart Search</p> <p>DWDR, HLC, BLC, AWB, AGC, 3D DNR, Rol, Defog, ICR, SMART H.264 +/-H.265+</p> <p>Built-in Dual Array Mic and Speaker, Audio in/out 1/1, Alarm in/out 2/2, Micro SD 256GB</p> <p>12V DC/PoE, IP67 and IK10 protection</p> <p><b>WizMind</b></p>                   |    | 470,600,000 |
| 9 ITC237-PW1B-IRZ      | <p><b>دوربین ANPR</b> با قابلیت تشخیص پلاک، مناسب برای ورودی های پارکینگ</p> <p>2 Megapixel Full HD WDR Access ANPR Camera</p> <p>-Embedded with LPR algorithm inside the camera</p> <p>-plate cutout, snapshot preview, recording</p> <p>-White list database, 1 ch relay out to control the barrier</p> <p>performance for outdoor applications-</p> <p>1/2.8" 2Megapixel progressive scan CMOS</p> <p>H.265/H.264M/H.264H/H.264 dual-stream encoding</p> <p>25/30fps@1080P(1920×1080), 2.7mm~12mm Motorize lens</p> <p>WDR(140dB),BLC,HLC,Day/Night(ICR),3DNR,AWB,AGC,BLC</p> <p>Mirco SD card 64GB, IR Distance 3~8m, IP67, IK10, PoE</p>                                                                                                                                     |    | 263,600,000 |
| 10 IPCS831EP-ZE        | <p>1/2.5" 8 Megapixel progressive scan STARVIS™ CMOS</p> <p>H.265+/H.265/H.264+/H.264 Triple-stream encoding</p> <p>15fps@4K(3840×2160), 25/30fps@3Mp(2304×1296)</p> <p>2.7mm ~12mm motorized lens, Max. Aperture F1.6</p> <p>WDR, Day/Night(ICR), 3DNR, AWB, AGC, BLC</p> <p>Micro SD card memory , 128 GB, 1/1 Audio In/Out, 2/1 Alarm In/Out</p> <p>Max. IR LEDs Length 50m , Smart IR, IP67, IK10, PoE</p> <p>(Tripwire Intrusion Object Abandoned/Missing Face)</p> <p><b>STARLIGHT</b> <b>Ambarella</b></p>                                                                                                                                                                                                                                                                 |    | 198,100,000 |
| 11 IPC-HFW2849T-ZAS-IL | <p><b>Full-Color</b> <b>Dual Light</b> <b>NEW</b></p> <p>8MP Smart Dual Light Vari-focal Bullet WizSense Network Camera</p> <p>8-MP 1/2.7" Progressive CMOS, max. 8MP@20 fps/4MP@25/30fps, 2.7-13.5mm</p> <p>Min. Illumination 0.008 lux@F1.5 (Color, 30 IRE) 0.0008 lux@F1.5 (B/W, 30 IRE) 0 lux (Illuminator on)</p> <p>WDR 120db, 3D DNR, HLC, BLC, AWB, AGC, ROI, SMART H.264+/H.265+, Smart Dual Light 60m</p> <p>SMD+, Intrusion, Tripwire, MSD256GB, Audio I/O 1/1, A;arm I/O 1/1, Built-in Mic</p> <p>IP67, IK10, 12 VDC/PoE, Metal</p> <p><b>STARLIGHT</b> <b>WizSense</b></p>                                                                                                                                                                                           |    | 191,400,000 |
| 12 IPC-HFW2849T-AS-IL  | <p><b>Dual Light</b></p> <p>8MP Smart Dual Light Fixed-focal Bullet WizSense Network Camera</p> <p>8-MP 1/2.7" Progressive CMOS image sensor, 8MP(3840×2160)@20fps, (2688×1520)@25/30fps</p> <p>Min. Illumination 0.008 Lux@F1.6 (Color, 30 IRE) 0.0008 Lux@F1.6 (B/W, 30 IRE) 0 lux (Illuminator on)</p> <p>Illumination Distance up to 60 m (195.85 ft) (IR) up to 50 m (164.04 ft) (Warm light)</p> <p>Smart H.265+; Smart H.264+ high compression rate, ultra-low bit rate</p> <p>Intelligent monitoring: Intrusion, tripwire, SMD Plus</p> <p>Rol, WDR 120db, HLC, BLC, AWB, AGC, 3D DNR, Smart illumination</p> <p>Alarm in/out 1/1, Audio in/out 1/1, Built-in Mic, Micro SD 256GB</p> <p>12 VDC/PoE, IP67, IK10, Metal Case</p> <p><b>STARLIGHT</b> <b>Full-Color</b></p> |  | 142,150,000 |
| 13 IPC-HFW2831T-ZAS-S2 | <p><b>STARLIGHT</b></p> <p>8MP Lite IR Vari-focal Bullet Network Camera</p> <p>8MP, 1/2.7" Progressive CMOS</p> <p>low illuminance 0.008 Lux@F1.5</p> <p>high image definition 8MP@15fps &amp; 4MP@25/30fps</p> <p>2.7-13.5mm Motorized Lens</p> <p>SMART H.264+/H.265+, (MJPEG in Sub Stream)</p> <p>IVS Intrusion, Tripwire</p> <p>Micro SD 256GB, 1ch Audio I/O, 1ch Alarm I/O</p> <p>WDR (120db), 3D DNR, HLC, BLC, AWB, AGC, Rol, Smart Illumination, Day/Night ICR Auto Switch</p> <p>12V, PoE, IP67, 4 IR LEDs 60m Distance, Onvif Profile S/G/T</p>                                                                                                                                                                                                                       |  | 158,050,000 |
| 14 HFW2831T-ZS-S2      | <p><b>STARLIGHT</b></p> <p>8MP Lite IR Vari-focal Starlight Bullet Network Camera</p> <p>1/2.7" progressive scan CMOS image sensor, low illuminance, high image definition</p> <p>Smart H.265/H.264 codec, MJPEG, high compression rate, ultra-low bit rate</p> <p>8MP (3840 × 2160) @15 fps, 2688×1520 @25/30 fps</p> <p>WDR(120db), Day/Night(ICR), 3DNR, AWB, AGC, BLC, HLC, Region of Interest, Voltage Detection</p> <p>2.7 mm~13.5 mm Motorized fixed lens</p> <p>Max. IR LEDs Length 60m, Micro SD card memory , 256 GB</p> <p>IP67, PoE, Smart Detection (Tripwire Intrusion)</p>                                                                                                                                                                                         |  | 156,250,000 |
| 15 IPC-HFW2831TP-AS-S2 | <p><b>STARLIGHT</b></p> <p>8MP Lite IR Fixed-focal Bullet Network Camera</p> <p>8MP, 1/2.7" CMOS image sensor</p> <p>max. 8MP (3840 × 2160) @15 fps, and supports 2688×1520 (2688 × 1520) @25/30 fps</p> <p>Smart H.265+/ Smart H.264+, H.265; H.264; H.264B; MJPEG (only supported by the sub stream)</p> <p>Built-in IR LED, max IR distance: 80m; 3.6mm Fixed Lenz</p> <p>Min. Illumination 0.009 Lux@F2.0</p> <p>ONVIF (Profile S/Profile G/Profile T); CGI; Milestone; Genetec</p> <p>WDR(120db), 3D NR, HLC, BLC, AGC, AWB, Rol, Smart IR</p> <p>Intrusion, tripwire</p> <p>Alarm: 1 in, 1 out; audio: 1 in, 1 out; supports max. 256 GB Micro SD card</p> <p>12V DC/POE power support supply, IP67, IK10</p>                                                               |  | 116,700,000 |

| رقم | نموذج                   | مواصفات فنية                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | تصوير                                                                                 | سعر (ريال)  |
|-----|-------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|-------------|
| 16  | IPC-HFW2831S-S-S2       | <p>8MP Lite IR Fixed-focal Bullet Network Camera</p> <p>1/2.7" Progressive CMOS image sensor, low illuminance, high image definition</p> <p>Illumination 0.009 Lux@F2.0</p> <p>SMART H.264+/H.265+, MJPEG, high compression rate, ultra-low bit rate</p> <p>8MP (3840 × 2160) @15 fps, and supports 2688×1520 (2688 × 1520) @25/30 fps</p> <p>WDR (120 db), 3D DNR, HLC, BLC, AGC, AWB, RoI, Smart IR</p> <p>Intrusion, tripwire, SD Card 256GB, IP67, PoE</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |    | 106,900,000 |
| 17  | IPC-HFW1830SP-0360B-S6  | <p>8MP 8MP 1/2.7" CMOS Entry IR Fixed-focal Bullet Network Camera</p> <p>Outputs max. 8MP@15fps, supports 2688 × 1520 (2688 × 1520) @25/30 fps</p> <p>Illumination 0.004 Lux@F2.0 (B/W, 30 IRE)</p> <p>H.265+&amp;H.264+ high compression rate, and ultra-low bit rate.</p> <p>WDR, Day/Night(ICR), 3DNR, AWB, AGC, BLC, HLC, Built-in MIC</p> <p>3.6mm fixed lens, Built-in IR LED, and the max. illumination distance is 30 m.</p> <p>12 V DC/PoE power supply, IP67</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |    | 92,500,000  |
| 18  | HF2531TP-ZS             | <p>1/2.7" 5Megapixel progressive CMOS</p> <p>2.7~13.5mm Motorized lens</p> <p>15fps@5M(2592×1944)&amp;25/30fps@3M(2304×1296)</p> <p>H.265+/H.265/H.264+/H.264 dual-stream encoding</p> <p>WDR(120dB), Day/Night(ICR), 3DNR, AWB, AGC, BLC</p> <p>Micro SD card 128GB, Max IR LEDs Length 60m, Smart IR</p> <p>IP67, PoE, Smart Detection (Tripwire Intrusion)</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |    | 137,350,000 |
| 19  | DH-IPC-HFW5449T1-ZE-LED | <p>4MP 1/1.8" CMOS image sensor, Full-color Vari-focal Warm LED Bullet WizMind Network Camera</p> <p>Outputs max. 4MP (2688 × 1520) @30 fps, Focal Length 2.7 mm~12 mm</p> <p>Min. Illumination 0.0005 Lux@F1.0, S/N Ratio &gt; 56 dB</p> <p>Built-in warm illuminator, and the max. illumination distance : 70 m</p> <p>ROI, SMART H.264+/H.265+, flexible coding, WDR 140db, 3D NR, HLC, BLC</p> <p>IVS (Perimeter Protection) : Tripwire; intrusion; fast moving, loitering detection, people gathering; parking detection, Face Detection, People Counting, Intelligent Search</p> <p>Alarm: 1 in, 1 out; audio: 1 in, 1 out; supports max. 256 G Micro SD card, <b>built-in Mic</b> and speaker</p> <p>12V DC/PoE power supply, ePoE, IP67 protection, SMD 3.0</p>                                                                                                                                                                                                                                                                                                                     |    | 263,600,000 |
| 20  | HF5442EP-ZE-0832        | <p>4MP Pro AI IR Vari-focal, WizMind 1/1.8" 4Megapixel progressive scan CMOS</p> <p>H.265,H.264,H.264B,H.264H, MJPEG triple-stream encoding</p> <p>Max 25/30fps@4Mp(2688×1520), 50/60fps@2Mp(1920 × 1080)</p> <p>WDR(140dB), Day/Night(ICR), 3DNR, AWB, AGC, BLC, HLC, EIS, Defog, Region of Interest, 8mm-32mm Motorized lenz,</p> <p>Max. IR LEDs Length 50m, Smart IR, Micro SD card memory , 128 GB</p> <p>Audio In/Out 1/1, Alarm In/Out 2/1</p> <p>Smart Detection Tripwire, intrusion (Recognition of vehicle and people), Object Abandoned / Missing, fast moving, loitering detection, parking detection and people gathering</p> <p>Support Line crossing/Region/Queueing people counting; Support 4 accesses independent detection, 4 areas independent detection, Scene Change, Heatmap, IP67, IK10, PoE</p>                                                                                                                                                                                                                                                                    |   | 223,600,000 |
| 21  | IPC-HFW5241E-Z5E        | <p>2MP IR Vari-focal Bullet WizMind Network Camera</p> <p>2MP 1/2.8" Progressive STARVIS™ CMOS</p> <p>low illuminance 0.0015 Lux@F1.3</p> <p>high image definition 2MP@25/30fps</p> <p>7-35mm Motorized Lens</p> <p>SMART H.264+/H.265+</p> <p>IVS: Tripwire; intrusion; fast moving (with accurate classification of vehicle and human); loitering detection; people gathering; parking detection</p> <p>Face Detection with Face Attributes and Face Expression</p> <p>People Counting with Queue Management</p> <p>Micro SD card 256 GB, 1ch Audio I/O, 2/1 Alarm I/O</p> <p>WDR (120db), EIS, Defog, 3D DNR, HLC, BLC, AWB, AGC, RoI, Smart Illumination, Day/Night ICR Auto Switch</p> <p>12V, PoE, IP67, IK10, 4 IR LEDs 120m Distance, Onvif Profile S/G/T</p>                                                                                                                                                                                                                                                                                                                       |  | 194,600,000 |
| 22  | IPC-HFW5541E-ZE-S3      | <p>5MP IR Vari-focal Bullet WizMind Network Camera</p> <p>5-MP (2960 × 1668) 1/2.7" CMOS image sensor, low luminance, and high definition image</p> <p>Super Low Illumination 0.0009 lux@F1.5(Color, 30 IRE) 0.0005 lux@F1.5(B/W, 30 IRE) 0 lux (Illuminator on 60m)</p> <p>2.7 mm~13.5 mm Motorized Lens, Field of View H: 114°~32°; V: 58°~17°; D: 138°~36°</p> <p>Smart H.265+; Smart H.264+; AI Coding</p> <p>Deep learning algorithm, video metadata, smart sound detection, people counting, queue management, Heat Map, Smart Search</p> <p>face detection with 6 Face Attributes and 8 Face Expressions</p> <p>smart object detection: Smart abandoned object; smart missing object</p> <p>IVS: Intrusion, tripwire, fast moving, loitering, people gathering, parking detection</p> <p>SMD 3.0 ( Less false alarm, longer detection distance ) with detailed information about human body and vehicle features</p> <p>BLC, HLC, WDR 120db, AI SSA, AWB, AGC, 3D DNR, RoI, EIS, Defog</p> <p>Built-in Mic, Audio I/O 1/1, Alarm I/O 2/1, Micro SD up to 512GB, ROM 4GB, RAM 1GB</p> |  | 248,400,000 |
| 23  | DH-IPC-HFW4431TP-S-S4   | <p>4MP WDR IR Mini Bullet Network Camera</p> <p>1/3" 4Megapixel progressive CMOS</p> <p>3.6mm fixed lens</p> <p>25/30fps@4Mp(2688×1520)</p> <p>H.265&amp;H.264 triple-stream encoding</p> <p>IVS(Tripwire, Intrusion, Object Abandoned/Missing, Face detection)</p> <p>WDR(120dB), Day/Night(ICR), 3DNR, AWB, AGC, BLC, HLC</p> <p>Micro SD memory 256GB</p> <p>Max. IR LEDs Length 80m, Smart IR, IP67, IK10, PoE</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |  | 88,350,000  |

| ردیف | مدل                         | مشخصات فنی                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | تصویر                                                                                 | قیمت (ریال) |
|------|-----------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|-------------|
| 24   | DH-IPC-HFW3849T1-AS-PV-S3   | <p>8MP Smart Dual Illumination Active Deterrence Fixed-focal Bullet WizSense Network Camera</p> <p>1/2.8" CMOS image sensor, low illuminance, high image definition</p> <p>Outputs max. 8 MP (3840 × 2160)@25/30 fps</p> <p>Min. Illumination 0.004 lux@F1.0 (Color, 30 IRE), 0.0004 lux@F1.0 (B/W, 30 IRE), 0 lux (illuminator on)</p> <p>Built-in warm illuminator, and the max. illumination distance: 30 m</p> <p>Intrusion, tripwire (support the classification and accurate detection of vehicle and human)</p> <p>WDR 120db, 3D NR, HLC, BLC, digital watermarking,</p> <p>Alarm: 1 in, 1 out; audio: 1 in, 1 out; supports max. 256G SD card; built-in dual MICs; 1-ch speaker</p> <p>12 VDC/PoE power supply, IP67 protection, Sound and light alarm (red and blue lights)</p> <p>SMD 3.0, One-click arming/disarming through alarm input Full Metal Case</p>                                                                                                                                                                    |    | 189,100,000 |
| 25   | IPC-HFW3849T1-AS-PV-S4      | <p>8MP Smart Dual Light Active Deterrence Fixed-focal Bullet WizSense Network Camera</p> <p>8-MP 1/2.8" CMOS image sensor, low luminance, and high definition image</p> <p>Outputs max. 8 MP (3840 × 2160)@25/30 fps, H.265 codec, high compression rate, ultra-low bit rate</p> <p>Min. Illumination 0.004 lux@F1.0 (Color, 30 IRE), 0.0004 lux@F1.0 (B/W, 30 IRE), 0 lux (illuminator on)</p> <p>Built-in warm light and IR LED; the max. IR illumination distance is 30 m and warm light distance is 30 m</p> <p>IVS: Intrusion, Tripwire, SMD 4.0, Quick Pick, Ai SSA, Ai Coding,</p> <p>WDR 120db, SSA, HLC, BLC, 3D DNR, Defog, AWB, AGC, Rol, ICR, Smart Illumination</p> <p>Dual Built-in Mic , Built-in Speaker, Audio in/out 1/1, Alarm Input 1 channel in: 5mA 3V~5 VDC, Alarm Output 1 channel out: 300mA 12 VDC ,Micro SD 256G, support two-way talk</p> <p>Power Supply 12V DC/PoE (802.3af), IP67 protection, One-tap arming/disarming through alarm input, Sound and light alarm (red and blue lights) Full Metal Case</p> |    | 190,450,000 |
| 26   | DH-IPC-HFW3449EP-AS-LED-3.6 | <p>4MP Full-color WDR IR Mini Bullet Network Camera</p> <p>1/2.7" 4Megapixel progressive CMOS</p> <p>3.6mm fixed lens</p> <p>25/30fps@4Mp(2688×1520)</p> <p>H.265/Smart H.265+/H.264/Smart H264+ triple-stream encoding</p> <p>IVS(Tripwire, Intrusion, Recognition of vehicle and people, SMD Plus)</p> <p>WDR(120dB), Day/Night(ICR), 3DNR, AWB, AGC, BLC, HLC</p> <p>Micro SD memory 256GB</p> <p>Max. IR LEDs Length 30m, Smart IR, IP67, PoE Full Metal Case</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |    | 106,300,000 |
| 27   | DH-IPC-HFW3449EP-AS-LED-2.8 | <p>4MP Full-color WDR IR Mini Bullet Network Camera</p> <p>1/2.7" 4Megapixel progressive CMOS</p> <p>2.8mm fixed lens</p> <p>25/30fps@4Mp(2688×1520)</p> <p>H.265/Smart H.265+/H.264/Smart H264+ triple-stream encoding</p> <p>IVS(Tripwire, Intrusion, Recognition of vehicle and people, SMD Plus)</p> <p>WDR(120dB), Day/Night(ICR), 3DNR, AWB, AGC, BLC, HLC</p> <p>Micro SD memory 256GB</p> <p>Max. IR LEDs Length 30m, Smart IR, IP67, PoE Full Metal Case</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |    | 106,300,000 |
| 28   | HFW3441TP-ZS-27135          | <p>4MP IR Vari-focal Bullet WizSense Network Camera</p> <p>1/3" 4Megapixel progressive CMOS</p> <p>Min. Illumination:0.005 Lux@F1.5</p> <p>2.7 mm~13.5 mm Motorized lens</p> <p>25/30fps@4Mp(2688×1520)</p> <p>SMART H.264+/H.265+ triple-stream encoding</p> <p>IVS(Tripwire; intrusion (Recognition of human and vehicle))</p> <p>WDR(120dB), Day/Night(ICR), 3DNR, AWB, AGC, BLC, HLC, Rol</p> <p>Micro SD memory 256GB</p> <p>Max. IR LEDs Length 80m, Smart IR, IP67, IK10, PoE Full Metal Case</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |  | 149,050,000 |
| 29   | IPC-HFW2849S-S-IL           | <p>8MP Smart Dual Light 2.8mm Fixed-focal Bullet WizSense Network Camera</p> <p>8-MP 1/2.7" CMOS image sensor, low luminance, and high definition image</p> <p>Outputs max. 8 MP (3840 × 2160) @20 fps, and supports 2688×1520 (2688 × 1520) @25/30 fps</p> <p>Min. Illumination 0.008 lux@F1.6 (Color, 30 IRE), 0.0008 lux@F1.6 (B/W, 30 IRE), 0 lux (Illuminator on)</p> <p>Built-in warm light and IR LED, the max. illumination distance is 30 m and the max. warmlight distance is 30m</p> <p>WDR 120db, BLC, HLC, AWB, AGC, Rol, 3D DNR, ICR, Smart Illumination</p> <p>IVS: Intrusion, Tripwire, SMD Plus, Smart Search</p> <p>Built-in Mic, Micro SD 256GB</p> <p>12 VDC/PoE (802.3af), IP67 Protection, Full Metal Case</p>                                                                                                                                                                                                                                                                                                       |  | 111,800,000 |
| 30   | IPC-HFW2841T-ZS             | <p>8MP IR Vari-focal Bullet WizSense Network Camera</p> <p>8-MP 1/2.7" Progressive CMOS image sensor 8MP@20fps,@25/30fps, 2.7-13.5mm Motorized Lens</p> <p>Smart H.265+; Smart H.264+ high compression rate, ultra-low bit rate</p> <p>Min. Illumination 0.008 lux@F1.5 (Color, 30 IRE) 0.0008 lux@F1.5 (B/W, 30 IRE) 0 lux (Illuminator on)</p> <p>Built-in IR LED, and the max. illumination distance is 60 m</p> <p>WDR 120db, BLC, HLC, AWB, AGC, Rol, 3D DNR, ICR, Smart Illumination</p> <p>Intelligent monitoring: Intrusion, tripwire, SMD Plus</p> <p>Built-in Mic, Micro SD 256GB, 12 VDC/PoE, IP67, IK10, Full Metal Case</p>                                                                                                                                                                                                                                                                                                                                                                                                   |  | 178,750,000 |
| 31   | IPC-HFW2549TL-S-PV          | <p>5MP Smart Dual Light <b>Active Deterrence</b> Fixed-focal Bullet WizSense Network Camera</p> <p>5-MP 1/2.7" Progressive CMOS, max. 5MP@20fps/4MP@25/30fps, 3.6 mm: H: 91.9°; V: 48.7°; D: 107.7°</p> <p>Min. Illumination 0.006 lux@F1.0 (Color, 30 IRE) 0.0006 lux@F1.0 (B/W, 30 IRE) 0 lux (Illuminator on)</p> <p>WDR 120 db, BLC, HLC, 3D DNR, Rol, AWB, AGC, Smart Dual Light 30m</p> <p>SMD+, Intrusion, tripwire, Active Deterrence, MSD 256GB, <b>Built-in Mic &amp; Speaker</b>, two-way talk, <b>Sound and light alarm</b>, <b>One-tap arming/disarming</b></p> <p>IP67, 12 VDC/PoE, easy for installation, Metal Case</p>                                                                                                                                                                                                                                                                                                                                                                                                    |  | 97,200,000  |

| مدل ردیف |                               | مشخصات فنی                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | تصویر                                                                                 | قیمت (ریال) |
|----------|-------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|-------------|
| 32       | IPC-HFW2549T-AS-IL            | <p>5MP Smart Dual Light Fixed-focal Bullet WizSense Network Camera</p> <p>5-MP 1/2.7" Progressive CMOS image sensor 5MP(2960 × 1668)@25/30 fps</p> <p>Smart H.265+; Smart H.264+ high compression rate, ultra-low bit rate</p> <p>Focal Length 2.7 mm–13.5 mm</p> <p>Min. Illumination 0.007 lux@F1.6 (Color, 30 IRE) 0.0007 lux@F1.6 (B/W, 30 IRE) 0 lux (Illuminator on)</p> <p>Built-in warm light and IR LED, the max. IR light distance is 60 m and max. warm light is 50 m</p> <p>WDR, Rol, HLC, BLC, AWB, AGC, 3D DNR, Smart illumination</p> <p>Intelligent monitoring: Intrusion, tripwire, SMD Plus</p> <p>Alarm in/out 1/1, Audio in/out 1/1, Built-in Mic, Micro SD 256GB</p> <p>12 VDC/PoE, IP67, IK10, Metal Case</p>                                                                                                                                                            |    | 124,200,000 |
| 33       | IPC-HFW2541T-AS-S2            | <p>5MP IR Fixed-focal Bullet WizSense Network Camera</p> <p>3.6mm Lens, 5-MP 1/2.7" CMOS image sensor, low luminance, and high definition image</p> <p>ROI, SMART H.264+/H.265+, flexible coding, applicable to various bandwidth and storage environments</p> <p>Built-in IR LED, and the max. illumination distance is 80 m</p> <p>Min. Illumination, 0.007 Lux@F1.6 (Color, 30 IRE), 0.0007 Lux@F1.6 (B/W, 30 IRE), 0 lux (Illuminator on)</p> <p>WDR 120db, HLC, BLC, AWB, AGC, 3D DNR, Auto ICR</p> <p>Intelligent monitoring: Intrusion, tripwire (the two functions support the classification and accurate detection of vehicle and human), SMD Plus</p> <p>Alarm: 1 in, 1 out; audio: 1 in, 1 out; Supports max. 256 G Micro SD card; built in MIC</p> <p>12 VDC/PoE power supply, easy for installation, IP67, Metal Case</p>                                                        |    | 115,300,000 |
| 34       | IPC-HFW2449S-S-LED            | <p>4MP Smart Dual Illumination Fixed-focal Bullet WizSense Network Camera</p> <p>4-MP 1/2.9" CMOS image sensor, low luminance, and high definition image</p> <p>Outputs max. 4 MP (2688 × 1520)@20 fps, and supports 2560 × 1440 @25/30 fps</p> <p>H.265 codec, high compression rate, ultra-low bit rate</p> <p>Min. Illumination :0.005 lux@F1.0</p> <p>Built-in warm light/IR LED, the max. illumination distance is 30 m</p> <p>ROI, SMART H.264+/H.265+, flexible coding</p> <p>Rotation mode, WDR, 3D NR, HLC, BLC, digital watermarking</p> <p>Intrusion, tripwire (support the classification and accurate detection of vehicle and human)</p> <p>Supports max. 256 G Micro SD card, built in MIC</p> <p>12 VDC/PoE power supply, easy for installation, IP67 protection, SMD Plus.Full Metal Case</p>                                                                                 |    | 79,400,000  |
| 35       | DH-IPC-HFW2449S-S-IL          | <p>4MP Smart Dual Illumination Fixed-focal Bullet WizSense Network Camera</p> <p>4-MP 1/2.9" CMOS image sensor, low luminance, and high definition image</p> <p>Outputs max. 4 MP (2688 × 1520)@20 fps, and supports 2560 × 1440 @25/30 fps</p> <p>H.265 codec, high compression rate, ultra-low bit rate</p> <p>Min. Illumination : 0.008 lux@F1.6 (Color, 30 IRE), 0.0008 lux@F1.6 (B/W, 30 IRE), 0 lux (Illuminator on)</p> <p>Built-in warm light/IR LED, the max. illumination distance is 30 m</p> <p>ROI, SMART H.264+/H.265+, flexible coding</p> <p>Rotation mode, WDR, 3D NR, HLC, BLC, digital watermarking</p> <p>Intrusion, tripwire (support the classification and accurate detection of vehicle and human)</p> <p>Supports max. 256 G Micro SD card, <b>built in MIC</b></p> <p>12 VDC/PoE power supply, easy for installation, IP67 protection, SMD Plus. Full Metal Case</p> |   | 79,400,000  |
| 36       | IPC-HFW2441S-S                | <p>4MP IR Fixed-focal Bullet WizSense Network Camera</p> <p>4-MP 1/2.9" Progressive CMOS image sensor, Outputs 4MP (2688 × 1520)@20 fps, and supports 2560 × 1440@25/30 fps</p> <p>Min. Illumination 0.006 Lux@F1.6(Color,30IRE) 0.0006 Lux@F1.6(B/W,30IRE) 0 lux (Illuminator on)</p> <p>H.265 codec, high compression rate, ultra-low bit rate</p> <p>Built-in IR LED, and the max. illumination distance is 30m</p> <p>Roi, SMART H.264 +/H.265+, WDR 120db, 3D NR, HLC, BLC, AWB, AGC, 3D DNR</p> <p>Intelligent monitoring: Intrusion, tripwire, SMD</p> <p>Micro SD card 256GB, built-in MIC, 12 VDC/PoE, IP67, Metal Case</p>                                                                                                                                                                                                                                                           |  | 69,000,000  |
| 37       | DH-IPC-HFW2441T-ZS            | <p>4MP IR Vari-focal Bullet WizSense Network Camera</p> <p>Outputs max. 4 MP (2688 × 1520)@20 fps, and supports 2560 × 1440 ,(2560 × 1440)@25/30 fps</p> <p>Min. Illumination, 0.008 lux@F1.5 (Color, 30 IRE), 0.0008 lux@F1.5 (B/W, 30 IRE), 0 lux (Illuminator on)</p> <p>H.265 codec, high compression rate, ultra-low bit rate, Focal Length 2.7 mm–13.5 mm</p> <p>Built-in IR LED, and the max. illumination distance is 60 m</p> <p>ROI, SMART H.264+/H.265+, flexible coding, WDR 120db, 3D NR, HLC, BLC</p> <p>Intrusion, tripwire (support the classification and accurate detection of vehicle and human)</p> <p>Alarm: 1 in, 1 out (Only - ZAS supports), audio: 1 in, 1 out (Only - ZAS supports), 256G SD card, <b>built in MIC</b></p> <p>12 VDC/PoE power supply, easy for installation, IP67, IK10 (optional) protection, SMD Plus</p>                                         |  | 133,900,000 |
| 38       | IPC-HFW2439SP-SA-LED-0360B-S2 | <p>4MP Lite Full-color Fixed-focal Bullet Network Camera</p> <p>4MP, 1/3" Progressive CMOS</p> <p>low illuminance 0.004 Lux@F1.0</p> <p>high image definition 4MP@25/30fps, 3.6mm Fixed lens</p> <p>SMART H.264+/H.265+, IVS Intrusion/Tripwire</p> <p>WDR (120db), 3D DNR, HLC, BLC, AWB, AGC, Rol, Smart Illumination, Day/Night ICR Auto Switch</p> <p>Micro SD 256GB, Built-in Mic</p> <p>12V, PoE, IP67, 1 Warmlight LED 30m Distance, Onvif Profile S/G/T</p>                                                                                                                                                                                                                                                                                                                                                                                                                            |  | 73,900,000  |
| 39       | HFW2431TP-AS-S2               | <p>4MP Lite IR Fixed-focal Bullet Network Camera,1/3" CMOS image sensor</p> <p>Outputs max. 4MP (2688 × 1520) @20 fps, and supports 2560x1440 (2560 × 1440) @25/30 fps</p> <p>Built-in IR LED, max IR distance: 80 m, Intelligent detection: Intrusion, tripwire</p> <p>H.265; H.264; H.264B; MJPEG(only supported</p> <p>WDR(120 dB), 3D NR, HLC, BLC, digital watermarking</p> <p>Alarm: 1 in, 1 out; audio: 1 in, 1 out; supports max. 256 GB Micro SD card</p> <p>12V DC/POE , IP67 protection, IK10 protection (optional)</p>                                                                                                                                                                                                                                                                                                                                                             |  | 90,450,000  |

| ردیف | مدل                                                                                                                                                                                               | مشخصات فنی                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | تصویر                                                                                 | قیمت (ریال) |
|------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|-------------|
| 40   | HF2431TP-ZS-S2<br>                                                                                               | 4MP WDR IR Bullet Network Camera<br>1/3" 4MP image sensor<br>SMART H.264/H.265 dual stream encoding<br>4MP (2688 × 1520)@20 fps,2560 × 1440 @25fps<br>Min. Illumination:0.008 Lux@F1.5, 2.7-13.5 mm Motorized lens<br>WDR(120dB), Day/Night(ICR), 3DNR, AWB, AGC, BLC, HLC, ROI<br>Smart Detection (Tripwire Intrusion)<br>Micro SD memory 256 GB, max IR distance:60 m, Smart IR, IP67, PoE                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |    | 117,300,000 |
| 41   | IPC-HFW1431S1-S4-S5                                                                                                                                                                               | 4MP Entry IR Fixed-focal Bullet Network Camera<br>4MP, 1/3" Progressive CMOS<br>low illuminance 0.03 Lux @ F2.0<br>high image definition 4MP@25/30fps<br>3.6mm fixed lens, Smart H.265+/H.264+<br>WDR(120db), Rol, BLC, HLC, 3D DNR, AWB, AGC, Day/Night Auto ICR, Smart Illumination<br>12V, PoE, IP67, 1 IR LEDs 30m Distance, ONVIF (Profile S/Profile G/Profile T)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |    | 50,400,000  |
| 42   | HF2431SP-0360B-S4                                                                                                                                                                                 | 4MP Entry IR Fixed-focal Bullet Network Camera<br>1/3" 4Megapixel progressive CMOS<br>SMART H.264/H.265 dual stream encoding<br>4MP (2688 × 1520)@20 fps,2560 × 1440 @25fps<br>Min. Illumination:0.03 Lux@F2.0, 3.6 Fixed lens<br>WDR(120dB), Day/Night(ICR), 3DNR, AWB, AGC, BLC, HLC, ROI<br>max IR distance:30 m, Smart IR, IP67, PoE                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |    | 59,350,000  |
| 43   | HF23541EP-AS<br>                | 5MP IR Fixed focal Bullet WizSense Network Camera<br>1/2.7" CMOS image sensor,Outputs max. 5MP (2592 × 1944) @20 fps<br>H.265 codecSMART H.264+/H.265+<br>WDR(120db), 3D DNR, HLC, BLC, digital watermarking,<br>Min Illumination 0.0005 Lux@F1.6 (B/W, 30IRE)<br>12V DC/POE IP67 SMD Plus<br>Supports max. 256 G Micro SD card, built-in Mic                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |    | Call        |
| 44   | IPC-HFW3549T1P-AS-PV<br>    | 5-MP 1/2.7" CMOS image sensor, low luminance, Smart Dual Illumination<br>Min. Illumination : 0.003 lux@F1.0 (Color, 30 IRE) / 0.0003 lux@F1.0 (B/W, 30 IRE) / 0 lux (illuminator on)<br>Lens Fixed-focal 3.6 mm , 15.6 m Recognize & 7.8 m Identify,<br>Illumination Distance : 30 m (2 IR LED) / 30 m (2 warm light)<br>AI H.265, AI H.264 , Smart H.265+ , Smart H.264+ , <b>Built-in MIC</b><br>Main stream: 2880 × 1620 or 2960 × 1668 @20fps / 2688 × 1520 @30fps<br>WDR (120db), 3D DNR, HLC, BLC, AWB, AGC, Rol(4 years), Smart Illumination, Defog, Scence Self-adaption<br>Storage : FTP, SFTP, Micro SD card (support max. 256 G), NAS<br>ROM : 128MB, RAM : 512MB, S/N Ratio > 56db , Sound and Light Alarm,<br>Active Deterrence, IVS (Tripwire, intrusion), SMD 4.0, Smart Search, Quick Pick, AI SSA<br>Audio In/out : 1/1 , Alarm in/out : 1/1, RJ-45 (10/100 Base-T) , 3.3 W (12 VDC); 4.4 W (PoE), IP67 |   | 159,000,000 |
| 45   | HF23549EP-AS-LED-0360B<br>  | 5MP Full-color Fixed-focal Warm LED Bullet WizSense Network Camera<br>5MP, 1/2.7" CMOS image sensor<br>low illuminance 0.003 Lux@F1.0<br>5MP@20 fps, 4MP@25/30 fps, 3.6mm Fixed lens<br>SMART H.264+/H.265+, IVS Intrusion/Tripwire<br>WDR (120db), 3D DNR, HLC, BLC, AWB, AGC, Rol, Smart Illumination, Day/Night ICR Auto Switch<br>Micro SD 256GB, Built-in Mic<br>12V, PoE, IP67, Built-in warm light, max. illumination distance: 30 m, Onvif Profile S/G/T, Full Metal Case                                                                                                                                                                                                                                                                                                                                                                                                                                        |  | 117,300,000 |
| 46   | IPC-HFW3541TP-ZS-27135<br>  | 5MP IR Vari-focal Bullet WizSense Network Camera<br>5MP, 1/2.7" Progressive CMOS<br>0.005 Lux@F1.5 (Color, 30IRE), 0.0005 Lux@F1.5 (B/W, 30IRE), 0 Lux (Illuminator on)<br>high image definition 5MP@20fps<br>2.7-13.5mm Motorized Lens<br>SMART H.264+/H.265+ 3 Streams<br>IVS Intrusion, Tripwire, Accurate Human/Vehicle Classification, SMD Plus<br>Micro SD 256GB<br>WDR (120db), 3D DNR, HLC, BLC, AWB, AGC, Rol, Smart Illumination, Day/Night ICR Auto Switch<br>12V, PoE, IP67, 4 IR LEDs 60m Distance, Onvif Profile S/G/T                                                                                                                                                                                                                                                                                                                                                                                     |  | 177,700,000 |
| 47   | IPC-HFW2531TP-AS-S2<br>                                                                                        | 5MP Lite IR Fixed-focal Bullet Network Camera<br>5MP, 1/2.7" Progressive CMOS<br>low illuminance 0.008 Lux@F1.6<br>high image definition 5MP@20fps, 3.6mm fixed Lens<br>SMART H.264+/H.265+, IVS Intrusion/Tripwire<br>1ch Alarm I/O, 1ch Audio I/O, Micro SD 256GB<br>WDR (120db), 3D DNR, HLC, BLC, AWB, AGC, Rol, Smart Illumination, Day/Night ICR Auto Switch<br>12V, PoE, IP67, IK10, IR LED 80m Distance, Onvif Profile S/G/T                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |  | 103,700,000 |
| 48   | HF2431SP-S-S2<br>                                                                                              | 4MP WDR IR Bullet Network Camera<br>1/3" 4MP image sensor<br>SMART H.264/H.265 dual stream encoding<br>4MP (2688 × 1520)@20 fps,2560 × 1440 @25fps<br>Min. Illumination:0.008 Lux@F1.6, 3.6mm Fixed lens<br>WDR(120dB), Day/Night(ICR), 3DNR, AWB, AGC, BLC, HLC, ROI<br>Smart Detection (Tripwire Intrusion)<br>Micro SD memory 256 GB, max IR distance: 30 m, Smart IR, IP67, PoE                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |  | 67,800,000  |

| مدل ردیف | مشخصات فنی                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | تصویر                                                                                                             | قیمت (ریال) |
|----------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------|-------------|
| 49       | <p>Full-color</p> <p>2MP Smart Dual Illumination Fixed-focal Bullet WizSense Network Camera<br/>2-MP 1/2.8" CMOS image sensor, low luminance, 0.0002 lux@F1.6 (B/W, 30 IRE)<br/>Outputs max. 2 MP (1920 × 1080)@25/30 fps, Fixed Lens 3.6mm<br/>Smart H.265+, Smart H.264+, H.264H, H.265, H.264, H.2648<br/>Built-in warm light/IR LED : 30m/30m<br/>ROI, WDR, 3D NR, HLC, BLC, digital watermarking<br/>SMD Plus, Intrusion, tripwire (two functions supported : detection of vehicle and human)<br/>Supports max. 256 G Micro SD card, built in MIC.<br/>12 VDC/PoE power supply, easy for installation, IP67</p> <p>STARLIGHT WizSense</p> |                                | 65,600,000  |
| 50       | <p>Full-color</p> <p>2MP Smart Dual Illumination Fixed-focal Bullet WizSense Network Camera<br/>2-MP 1/2.8" CMOS image sensor, low luminance, 0.0002 lux@F1.6 (B/W, 30 IRE)<br/>Outputs max. 2 MP (1920 × 1080)@25/30 fps, Fixed Lens 3.6mm<br/>Smart H.265+, Smart H.264+, H.264H, H.265, H.264, H.2648<br/>Built-in warm light/IR LED : 30m/30m<br/>ROI, WDR, 3D NR, HLC, BLC, digital watermarking<br/>SMD Plus, Intrusion, tripwire (two functions supported : detection of vehicle and human)<br/>Supports max. 256 G Micro SD card, built in MIC.<br/>12 VDC/PoE power supply, easy for installation, IP67</p> <p>STARLIGHT WizSense</p> |                                | 65,600,000  |
| 51       | <p>2MP WDR IR Bullet Network Camera, starlight<br/>1/2.8" 2Megapixel progressive CMOS<br/>Min. Illumination:0.002 Lux@F1.6<br/>Outputs max. 2MP (1920 × 1080) @25/30 fps, 3.6mm Fixed lens<br/>SMART H.264/H.265 dual-stream encoding, IVS(Tripwire, intrusion)<br/>WDR(120dB), Day/Night(ICR), 3DNR, AWB, AGC, BLC, HLC, Roi Micro SD memory 256GB<br/>Max. IR LEDs Length 30m, Smart IR, IP67, PoE</p> <p>STARLIGHT</p>                                                                                                                                                                                                                      |                                | 49,700,000  |
| 52       | <p>2MP IR Bullet Network Camera<br/>1/2.7" CMOS image sensor, low illuminance, high image definition<br/>H.265+/H.265/H.264+/H.264 Double-stream encoding<br/>25/30fps@1080P(1920×1080)<br/>DWR, Day/Night(ICR), 3DNR, AWB, AGC, BLC, HLC, ROI<br/>3.6mm, Max. IR LEDs Length 30m, Smart IR<br/>Micro SD card memory 128 GB, IP67, PoE, AVI(Tripwire Intrusion)</p> <p>STARLIGHT</p>                                                                                                                                                                                                                                                           |                                | 47,950,000  |
| 53       | <p>2MP Lite Full-color Fixed-focal Bullet Network Camera<br/>1/2.8" CMOS image sensor, Outputs max. 2MP (1920 × 1080) @25/30 fps<br/>ROI, SMART H.264+/H.265+, flexible coding,<br/>Min Illumination 0.0017 Lux@F1.0<br/>Intelligent detection: Intrusion, tripwire<br/>WDR(120db), 3D NR, HLC, BLC, digital watermarking<br/>Supports max. 256 GB Micro SD card and built-in Mic, 12V DC/PoE, IP67</p> <p>Full-color</p>                                                                                                                                                                                                                      |                               | 59,900,000  |
| 54       | <p>2MP Lite IR Vari-focal Bullet Network Camera<br/>2MP, 1/2.8" Progressive CMOS, low illuminance 0.002 Lux@F1.5<br/>high image definition 2MP@25/30fps, 2.7-13.5mm Motorized Lens, SMART H.264+/H.265+<br/>IVS Intrusion, Tripwire, Micro SD card 256 GB<br/>WDR(120db), Roi, BLC, HLC, 3D DNR, AWB, AGC, Day/Night Auto ICR, Smart Illumination<br/>12V, PoE, IP67, IK10, 4 IR LEDs 60m Distance, Onvif Profile S/G/T</p> <p>STARLIGHT</p>                                                                                                                                                                                                   |                              | 103,700,000 |
| 55       | <p>Dual Light</p> <p>8MP Entry Smart Dual Light Fixed-focal Bullet Network Camera<br/>8-MP 1/2.7" Progressive CMOS sensor, 8MP@20 fps, and 4MP@25/30 fps, 3.6mm Fixed Lens, HfV 100°<br/>Built-in Multi-core Light, IR 30m warmlight 30m, 0.008 lux@F1.6 (Color, 30 IRE); 0.0008 lux@F1.6 (B/W, 30 IRE); 0 lux (Illuminator on)<br/>Human Detection, 2 Streams, H.265+, Smart Codec, Smart Dual Light, Built-in Mic<br/>DWR, HLC, BLC, 3D DNR, Roi, AGC, AWB<br/>12VDC, IP67, Metal Case, easy for installation</p> <p>STARLIGHT Full-color</p>                                                                                                |                              | 96,400,000  |
| 56       | <p>Dual Light</p> <p>6MP Entry Smart Dual Light Fixed-focal Bullet Network Camera<br/>1/2.7" Progressive CMOS sensor, max. 6MP@20 fps, and 4MP@25/30 fps, 3.6mm Fixed Lens, HfV 91°<br/>Built-in Multi-core Light, IR 30m warmlight 30m, 0.007 lux@F1.6 (Color, 30 IRE); 0.0007 lux@F1.6 (B/W, 30 IRE); 0 lux (Illuminator on)<br/>DWR, HLC, BLC, 3D DNR, Roi, AGC, AWB<br/>Human Detection, 2 Streams, H.265+, Smart Codec, Smart Dual Light, Built-in Mic<br/>12VDC, IP67, Metal Case, easy for installation</p> <p>STARLIGHT Full-color</p>                                                                                                 |                              | 68,400,000  |
| 57       | <p>5MP 1/2.7" CMOS image sensor<br/>Outputs max. 5MP (2880 × 1620) @20 fps, Fixed-focal 3.6mm<br/>min illumination 0.003 Lux@F2.0 (B/W, 30 IRE)<br/>H.265 codec, SMART H.264 +/H.265+,<br/>Built-in IR LED, and the max. illumination distance is 30 m<br/>DWR, 3D NR, HLC, BLC, digital watermarking<br/>Built-in MIC, IP67, POE</p> <p>STARLIGHT</p>                                                                                                                                                                                                                                                                                         |  | 63,500,000  |
| 58       | <p>Dual Light</p> <p>4MP Entry Full-color Fixed-focal Bullet Network Camera<br/>-MP 1/2.9" Progressive CMOS sensor, max. 4MP@25/30 fps, 3.6mm Fixed Lens, HfV 95°<br/>IR 40m, Warmlight 30m, 0.006 lux@F1.6<br/>WDR 120db, HLC, BLC, 3D DNR, Roi, AGC, AWB<br/>human detection, 2 Streams, H.265+, Smart Codec, Smart Dual Light, Built-in Mic<br/>12 VDC/PoE, Metal + plastic, IP67</p> <p>STARLIGHT Full-color</p>                                                                                                                                                                                                                           |                              | 61,900,000  |
| 59       | <p>Full-color</p> <p>4MP Entry Full-color Fixed-focal Bullet Network Camera<br/>4-MP 1/3" Progressive CMOS image sensor, Outputs max. 4 MP (2560 × 1440)@25/30 fps<br/>Min. Illumination 0.008 lux@F1.6, Illumination Distance 15 m (49.21 ft) (warm light)<br/>SMART H.264+/H.265+, Roi, WDR 120db, BLC, HLC, AWB, AGC, 3D DNR, Smart Illumination<br/>Built-in Mic, 12 VDC/PoE, Metal + plastic, IP67</p>                                                                                                                                                                                                                                    |                              | 58,800,000  |

| مدل ردیف | مشخصات فنی                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | تصویر                                                                                 | قیمت (ریال) |
|----------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|-------------|
| 60       | <p><b>NEW</b></p> <p>DH-IPC-HFW1239TC1-LED-S6</p> <p><b>STARLIGHT</b> <b>Full-Color</b></p> <p>2 MP Entry Full-color Fixed-focal Bullet Network Camera<br/>2-MP 1/2.8" Progressive CMOS, max. 2 MP (1920 × 1080)@25/30 fps<br/>warm light 30m, 0.005 lux@F1.6, 3.6 mm: H: 87°; V: 44°; D: 105°<br/>DWDR, 3D NR, HLC, BLC, ROI, AWB, AGC, SMART H.264+/H.265+<br/>human detection, Full-color<br/>IP67, 12 VDC/PoE, easy for installation, Metal+Plastic</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |    | 45,750,000  |
| 61       | <p>DH-IPC-HFW1239TL1-A-IL</p> <p><b>STARLIGHT</b> <b>Full-Color</b></p> <p>2MP Smart Dual Light Fixed-focal Bullet Network Camera<br/>2-MP 1/2.8" Progressive CMOS sensor, max. 2MP@30 fps<br/>Built-in multi-core light, IR 30m Warmlight 30m, 0.005 lux@F1.6 (Color,30 IRE)<br/>DWDR, HLC, BLC, AGC, AWB, 3D DNR, Smart Dual Light<br/>human detection, 2 Streams, H.265+, Smart Codec, Smart Dual Light, Built-in Mic<br/>12 VDC/PoE, Metal + plastic, IP67</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |    | 47,250,000  |
| 62       | <p>IPC-HFW1239S1-A-LED-S5</p> <p><b>Full-Color</b></p> <p>2MP Entry Full-color Fixed-focal Bullet Network Camera<br/>2-MP 1/2.8" Progressive CMOS sensor, max. 2MP@25/30 fps, 2.8mm Fixed Lens, HfOV 107°<br/>H.265 codec, high compression rate, ultra-low bit rate, 0.005 lux@F1.6, Warmlight 15m<br/>DWDR, 3D DNR, HLC, BLC, AWB, AGC, ROI<br/>Built-in MIC<br/>IP67, 12 VDC/PoE, Metal+Plastic</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |    | 44,900,000  |
| 63       | <p>DH-IPC-HFW1239S1-LED-S5</p> <p><b>STARLIGHT</b> <b>Full-Color</b></p> <p>2MP Lite Full-color Fixed-focal Bullet Network Camera<br/>2MP, 1/2.8" Progressive CMOS<br/>low illuminance 0.005 Lux @F1.6<br/>high image definition 2MP@25/30fps<br/>3.6mm fixed lens<br/>SMART H.264+/H.265+<br/>DWDR/BLC/HLC/AWB/AGC/3D DNR/ROI, Smart Illumination<br/>12V, PoE, IP67, 1 Warmlight LED 15m Distance, Onvif Profile S/T</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |    | 43,900,000  |
| 64       | <p>HFW1230T1P-ZS</p> <p>2MP Entry, 1/2.8" CMOS image sensor, low luminance, and high definition image<br/>Outputs max. 2MP (1920 × 1080)@25/30 fps.<br/>Min. Illumination : 0.008 Lux@F1.7 (Color, 30 IRE), 0.0008 Lux@F1.7 (B/W, 30 IRE)<br/>Motorized vari-focal, 2.8 mm–12 mm, IR Distance 50 m(2 IR)<br/>Smart H.265+, Smart H.264+, H.265 codec, high compression rate, ultra-low bit rate.<br/>DWDR, 3D DNR, HLC, BLC, AWB, AGC, ROI(4 years), Smart Illumination, S/N Ratio &gt; 56 dB<br/>1 Port RJ-45 (10/100 Base-T), 12V DC/PoE (802.3af), IP67, Humidity ≤95%</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |    | 82,800,000  |
| 65       | <p>HFW1230S1P-0360B-S5</p> <p>2MP Entry IR Fixed-Focal Bullet Network Camera<br/>1/2.8" CMOS image sensor, low illuminance<br/>Fixed Lens 3.6mm, F2.0, Horizontal: 84°<br/>Outputs max. 2MP (1920 × 1080) @25/30 fps<br/>Smart H.265+, Smart H.264+, H.265, H.264, H.264B<br/>ONVIF (Profile S/Profile T)<br/>Built-in efficient IR illuminator, and the max. illumination distance is 30 m<br/>ROI, DWDR, 3D NR, HLC, BLC, digital watermarking<br/>2V DC/PoE power supply, IP67</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |  | 40,900,000  |
| 66       | <p>HFW1230SP-S4-S5</p> <p>2MP Entry IR Fixed-focal Bullet Network Camera<br/>1/2.7" 2Megapixel progressive CMOS<br/>SMART H.264/H.265 dual stream encoding<br/>max. 2MP (1920 × 1080p) @25/30 fps<br/>Min. Illumination:0.01 Lux@F2.0<br/>3.6 Fixed lens<br/>DWDR, Day/Night(ICR), 3DNR, AWB, AGC, BLC, HLC, ROI<br/>max IR distance:30m, Smart IR<br/>IP67, PoE</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |  | 43,100,000  |
| 67       | <p>IPC-HDBW5541E-ZE-S3</p> <p><b>Super STARLIGHT</b></p> <p>5MP IR Vari-focal Vandal-proof Dome WizMind Network Camera<br/>5-MP (2960 × 1668) 1/2.7" CMOS image sensor, low luminance, and high definition image<br/>Super Low Illumination 0.0009 lux@F1.5(Color, 30 IRE) 0.0005 lux@F1.5(B/W, 30 IRE) 0 lux (Illuminator on 40m)<br/>2.7 mm–13.5 mm Motorized Lens, Field of View H: 114°–32°; V: 58°–17°; D: 138°–36°<br/>Smart H.265+; Smart H.264+; AI Coding<br/>Deep learning algorithm, video metadata, smart sound detection, people counting, queue management, Heat Map, Smart Search<br/>face detection with 6 Face Attributes and 8 Face Expressions<br/>smart object detection: Smart abandoned object; smart missing object<br/>IVS: Intrusion, tripwire, fast moving, loitering, people gathering, parking detection<br/>SMD 3.0 ( Less false alarm, longer detection distance ) with detailed information about human body and vehicle features<br/>BLC, HLC, WDR 120db, AI SSA, AWB, AGC, 3D DNR, ROI, EIS, Defog<br/>Built-in Mic, Audio I/O 1/1, Alarm I/O 2/1, Micro SD up to 512GB, ROM 4GB, RAM 1GB<br/>IP67 and IK10 protection</p> <p><b>Wiz Mind</b> <b>ACUPICK</b></p> |  | 247,050,000 |
| 68       | <p>HDW4431EMP-AS-S4</p> <p>4MP IR Eyeball Network Camera<br/>1/3" 4Megapixel progressive CMOS<br/>2.8mm fixed lens<br/>25/30fps@4Mp(2688×1520)<br/>H.265&amp;H.264 triple-stream encoding<br/>IVS(Tripwire, Intrusion, Object Abandoned/Missing, Face detection)<br/>WDR(120dB), Day/Night(ICR), 3DNR, AWB, AGC, BLC, HLC<br/>Built-in Mic<br/>Micro SD memory 256GB<br/>Max. IR LEDs Length 50m, Smart IR, IP67, PoE</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |  | 76,650,000  |

| ردیف | مدل                 | مشخصات فنی                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | تصویر                                                                                 | قیمت (ریال) |
|------|---------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|-------------|
| 69   | IPC-HDBW3541E-S-S2  | <p>5MP IR Fixed-focal Dome WizSense Network Camera</p> <p>5-MP (2960 × 1668) @20fps 1/2.7" CMOS image sensor, excellent low luminance performance and high definition of images</p> <p>0.005 lux@F1.4 (Color, 30 IRE), 0.0005 lux@F1.4 (B/W, 30 IRE), 0 lux (Illuminator on 50m)</p> <p>2.8 mm: Horizontal: 111°; Vertical: 58°; Diagonal: 132°</p> <p>Smart H.265+, Smart H.264+, AI Coding</p> <p>IVS: Tripwire, Intrusion, SMD 4.0, Smart Search, Scene Changing, Audio Detection</p> <p>BLC, HLC, WDR 120db, AI SSA, AWB, AGC, 3D DNR, ROI, Defog, AFSA</p> <p>Built-in Mic, Micro SD up to 256GB, ROM 128MB, RAM 512MB</p> <p>IP67, IK10 protection, Easy Installation</p> |    | 110,600,000 |
| 70   | HDBW3441EP-AS       | <p>4MP IR Fixed focal Dome WizSense Network Camera</p> <p>1/3" CMOS image sensor Outputs max. 4MP (2688 × 1520)@30 fps</p> <p>H.265 codec, SMART H.264+/H.265+</p> <p>WDR(120db), 3D DNR, HLC, BLC, digital watermarking</p> <p>Supports max. 256 G Micro SD card, 12V DC/POE, IP67, IK10, SMD Plus</p> <p>Min Illumination 0.0005 Lux@F1.6 (B/W, 30IRE)</p> <p>Audio Input 1 channel (RCA port), Audio Output 1 channel (RCA port)</p> <p>Alarm Input 1 channel in, Alarm Output 1 channel out</p>                                                                                                                                                                             |    | 91,000,000  |
| 71   | HDW3441TMP-AS-0280B | <p>4MP IR Fixed focal Eyeball WizSense Network Camera</p> <p>1/3" 4Megapixel progressive CMOS</p> <p>Min. Illumination: 0.005 Lux@F1.6</p> <p>2.8mm Motorized lens</p> <p>25/30fps@4Mp(2688×1520)</p> <p>SMART H.264+/H.265+ triple-stream encoding</p> <p>IVS(Tripwire; intrusion (Recognition of human and vehicle))</p> <p>WDR(120dB), Day/Night(ICR), 3DNR, AWB, AGC, BLC, HLC, ROI</p> <p>Built-in Mic, Micro SD memory 256GB</p> <p>Max. IR LEDs Length 50m, Smart IR, IP67, PoE</p>                                                                                                                                                                                      |    | 86,300,000  |
| 72   | HDBW2831EP-S-S2     | <p>1/2.7" 8Megapixel progressive CMOS</p> <p>Min. Illumination: 0.009 Lux@F2.0</p> <p>3.6mm Fixed Lens</p> <p>max. 8MP (3840 × 2160) @15 fps, 2688×1520 (2688 × 1520) @25/30 fps</p> <p>SMART H.264+/H.265+, flexible coding</p> <p>IVS(Tripwire; intrusion), Abnormality detection: Motion detection, video tampering</p> <p>WDR(120dB), Day/Night(ICR), 3DNR, AWB, AGC, BLC, HLC, ROI</p> <p>Micro SD memory 256GB</p> <p>Built-in IR LED Max.Length 30m, IP67, PoE</p>                                                                                                                                                                                                       |    | 111,000,000 |
| 73   | HDBW2531RP-ZAS      | <p>1/2.7" 5Megapixel progressive CMOS</p> <p>2.7~13.5mm Motorized lens</p> <p>20fps@5M(2592×1944)&amp;25/30fps@3M(2304×1296)</p> <p>H.265+/H.265/H.264+/H.264 dual-stream encoding</p> <p>WDR(120dB), Day/Night(ICR), 3DNR, AWB, AGC, BLC</p> <p>1/1 Audio in/out, 1/1 Alarm in/out</p> <p>Micro SD card 128GB</p> <p>Max IR LEDs Length 30m, Smart IR</p> <p>IP67, IK10, PoE</p>                                                                                                                                                                                                                                                                                               |  | 137,250,000 |
| 74   | IPC-HDBW2531E-S-S2  | <p>5MP Lite IR Fixed-focal Dome Network Camera</p> <p>5MP, 1/2.7" Progressive CMOS</p> <p>Min. Illumination 0.008 Lux @ F1.6</p> <p>Max 5MP@20fps</p> <p>SMART H.264+/H.265+</p> <p>IVS: Intrusion, tripwire</p> <p>Micro SD card 256GB</p> <p>WDR(120dB), Day/Night(ICR), 3DNR, AWB, AGC, BLC, HLC, ROI</p> <p>max IR distance: 30m, 12V DC, PoE, IP67, IK10</p>                                                                                                                                                                                                                                                                                                               |  | 69,000,000  |
| 75   | IPC-HDW2831TP-AS-S2 | <p>8MP Lite IR Fixed-focal Eyeball Network Camera</p> <p>1/2.7" CMOS image sensor Outputs max. 8MP (3840 × 2160) @15 fps</p> <p>Min Illumination 0.009 Lux@F2.0</p> <p>Built-in IR LED, max IR distance: 30 m</p> <p>SMART H.264+/H.265+ WDR, 3D NR, HLC, BLC, digital watermarking</p> <p>Supports max. 256 GB Micro SD card, built-in MIC</p> <p>12V DC/PoE, IP67</p>                                                                                                                                                                                                                                                                                                         |  | 111,700,000 |
| 76   | IPC-HDW2449T-S-LED  | <p>4MP Full-color Fixed-focal Eyeball Wizsense Network Camera</p> <p>4-MP 1/2.9" Progressive CMOS image sensor, 4MP(2688× 1520)@20fps, (2560×1440)@25/30fps</p> <p>Min. Illumination 0.005 lux@F1.0, Built-in warm light, max. illumination distance 30m</p> <p>Smart H.265+; Smart H.264+ high compression rate, ultra-low bit rate</p> <p>ROI, WDR 120db, HLC, BLC, AGC, AWB, 3D DNR, Smart illumination</p> <p>Intelligent monitoring: Intrusion, tripwire, SMD Plus</p> <p>Built-in Mic, Micro SD 256GB</p> <p>12 VDC/PoE, IP67, Metal+Plastic Case</p>                                                                                                                     |  | 79,100,000  |

| رقم | نموذج                         | مواصفات فنية                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | تصوير                                                                                 | سعر (ريال)  |
|-----|-------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|-------------|
| 77  | DH-IPC-HDW2449T-S-IL          | <p>4MP Smart Dual Illumination Fixed-focal Eyeball WizSense Network Camera</p> <p>Outputs max. 4 MP (2688 × 1520)@20 fps, and supports 2560 × 1440 @25/30 fps</p> <p>Min. Illumination : 0.008 lux@F1.6 (Color, 30 IRE), 0.0008 lux@F1.6 (B/W, 30 IRE), 0 lux (Illuminator on)</p> <p>H.265 codec, high compression rate, ultra-low bit rate</p> <p>Built-in warm light/IR LED, the max. illumination distance is 30 m</p> <p>ROI, SMART H.264+/H.265+, flexible coding, WDR, 3D NR, HLC, BLC, digital watermarking</p> <p>Intrusion, tripwire (support the classification and accurate detection of vehicle and human Supports max. 256 G Micro SD card; built in MIC, 12 VDC/PoE power supply, easy for installation, IP67 protection,SMD Plus</p>                                                                                                       |    | 81,300,000  |
| 78  | IPC-HDW2439TP-AS-LED-0360B    | <p>4MP Lite Full-color Fixed-focal Bullet Network Camera</p> <p>4MP, 1/3" Progressive CMOS</p> <p>low illuminance 0.004 Lux@F1.0</p> <p>high image definition 4MP@25/30fps</p> <p>3.6mm Fixed lens</p> <p>SMART H.264+/H.265+</p> <p>IVS Intrusion/Tripwire</p> <p>WDR (120db), 3D DNR, HLC, BLC, AWB, AGC, RoI, Smart Illumination, Day/Night ICR Auto Switch</p> <p>Micro SD 256GB, <b>Built-in Mic</b></p> <p>12V, PoE, IP67, 2 Warmlight LED 30m Distance, Onvif Profile S/G/T</p>                                                                                                                                                                                                                                                                                                                                                                     |    | 75,400,000  |
| 79  | IPC-HDW2439TP-AS-LED-0280B-S2 | <p>4MP Lite Full-color Fixed-focal Bullet Network Camera</p> <p>4MP, 1/3" Progressive CMOS</p> <p>low illuminance 0.004 Lux@F1.0</p> <p>high image definition 4MP@25/30fps</p> <p>2.8mm Fixed lens</p> <p>SMART H.264+/H.265+</p> <p>IVS Intrusion/Tripwire</p> <p>WDR (120db), 3D DNR, HLC, BLC, AWB, AGC, RoI, Smart Illumination, Day/Night ICR Auto Switch</p> <p>Micro SD 256GB, <b>Built-in Mic</b></p> <p>12V, PoE, IP67, 2 Warmlight LED 30m Distance, Onvif Profile S/G/T</p>                                                                                                                                                                                                                                                                                                                                                                     |    | 75,400,000  |
| 80  | DH-IPC-HDBW2441E-S            | <p>4MP 1/2.9" CMOS image sensor, IR Fixed-focal Dome WizSense Network Camera</p> <p>Outputs max. 4 MP (2688 × 1520)@20 fps, and supports 2566 × 1440@25/30 fps</p> <p>Min. Illumination 0.008 lux@F1.6 (Color,30IRE), 0.0008 lux@F1.6 (B/W,30IRE), 0 lux (Illuminator on)</p> <p>H.265 codec, high compression rate, ultra-low bit rate</p> <p>Built-in IR LED, and the max. illumination distance is 30 m</p> <p>ROI, SMART H.264+/H.265+, flexible coding, , WDR 120db, 3D NR, HLC, BLC</p> <p>Intrusion, tripwire (support the classification and accurate detection of vehicle and human)</p> <p>Supports max. 256 G Micro SD card; <b>built in MIC</b></p> <p>12 VDC/PoE power supply, easy for installation, IP67, IK10 protection, SMD Plus</p>                                                                                                     |    | 74,650,000  |
| 81  | DH-IPC-HDBW2441R-ZS           | <p>4MP IR Vari-focal Dome WizSense Network Camera, 4-MP 1/2.9" CMOS image sensor</p> <p>Outputs max. 4 MP (2688 × 1520)@20 fps and supports 2560 × 1440 , (2560 × 1440)@25/30 fps</p> <p>Min. Illumination 0.008 lux@F1.5 (Color, 30 IRE) , 0.0008 lux@F1.5 (B/W, 30 IRE) , 0 lux (Illuminator on)</p> <p>H.265 codec, high compression rate, ultra-low bit rate</p> <p>Built-in IR LED, and the max. illumination distance : 40 m, ROI, SMART H.264+/H.265+</p> <p>WDR 120db, 3D NR, HLC, BLC, Focal Length 2.7 mm–13.5 mm</p> <p>Intrusion, tripwire (support the classification and accurate detection of vehicle and human)</p> <p>Alarm: 1 in, 1 out (Only - ZAS supports); audio: 1 in, 1 out (Only - ZAS supports); 256G SD card; <b>built in MIC</b></p> <p>12 VDC/PoE power supply, easy for installation, IP67 and IK10 protection, SMD Plus</p> |  | 130,800,000 |
| 82  | IPC-HDW2441T-S                | <p>4MP IR Fixed-focal Eyeball WizSense Network Camera</p> <p>4-MP 1/2.9" Progressive CMOS image sensor, Output 4MP (2688 × 1520)@20 fps, 2560 × 1440@25/30 fps</p> <p>Min. Illumination 0.006 lux@F1.6 (Color, 30IRE) 0.0006 lux@F1.6 (B/W, 30IRE) 0 lux (Illuminator on)</p> <p>Smart H.265+; Smart H.264+, high compression rate, ultra-low bit rate</p> <p>Built-in IR LED, and the max. illumination distance is 30 m</p> <p>WDR 120db, 3D NR, HLC, BLC, RoI, AWB, AGC, 3D DNR</p> <p>Intelligent monitoring: Intrusion, tripwire, SMD Plus</p> <p>Built-in Mic, Micro SD 256GB, IP67, 12 VDC/PoE, Metal+Plastic</p>                                                                                                                                                                                                                                   |  | 70,350,000  |
| 83  | HDBW2431RP-ZS-27135-S2        | <p>4MP WDR IR Dome Network Camera</p> <p>1/3" 4Megapixel progressive CMOS</p> <p>SMART H.264/H.265 dual stream encoding</p> <p>4MP (2688 × 1520)@20 fps,2560 × 1440 @25fps</p> <p>Min. Illumination:0.008 Lux@F1.5</p> <p>2.7–13.5 mm Motorized lens</p> <p>WDR(120db), Day/Night(ICR), 3DNR, AWB, AGC, BLC, HLC, ROI</p> <p>Smart Detection (Tripwire Intrusion)</p> <p>Micro SD memory 256 GB</p> <p>1/1 Audio in/out, 1/1 Alarm in/out</p> <p>max IR distance:40 m, Smart IR</p> <p>IP67, IK10, PoE</p>                                                                                                                                                                                                                                                                                                                                                 |  | 115,300,000 |
| 84  | HDBW2431RP-ZAS-S2             | <p>4MP WDR IR Dome Network Camera</p> <p>1/3" 4Megapixel progressive CMOS</p> <p>SMART H.264/H.265 dual stream encoding</p> <p>4MP (2688 × 1520)@20 fps,2560 × 1440 @25fps</p> <p>Min. Illumination:0.008 Lux@F1.5</p> <p>2.7–13.5 mm Motorized lens</p> <p>WDR(120db), Day/Night(ICR), 3DNR, AWB, AGC, BLC, HLC, ROI</p> <p>Smart Detection (Tripwire Intrusion)</p> <p>Micro SD memory 256 GB</p> <p>1/1 Audio in/out, 1/1 Alarm in/out</p> <p>max IR distance:40 m, Smart IR</p> <p>IP67, IK10, PoE</p>                                                                                                                                                                                                                                                                                                                                                 |  | 116,400,000 |

| ردیف | مدل                                                                                                                                                                                                                                                                                                                                                                  | مشخصات فنی                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | تصویر                                                                                 | قیمت (ریال) |
|------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|-------------|
| 85   | HDBW2431EP-S-0360B-S2<br>                                                                                                                                                                                                                                                           | 4MP IR Mini Dome Network Camera<br>1/3" 4Megapixel progressive CMOS<br>SMART H.264/H.265 dual stream encoding<br>4MP (2688 × 1520)@20 fps,2560 × 1440 @25fps<br>Min. Illumination:0.008 Lux @ F1.6<br>3.6 mm Fixed lens<br>WDR(120dB), Day/Night(ICR), 3DNR, AWB, AGC, BLC, HLC, ROI<br>Smart Detection (Tripwire Intrusion)<br>Micro SD memory 256 GB<br>max IR distance:30 m, Smart IR<br>IP67, IK10, PoE                                                                                                                                                                                                              |    | 65,400,000  |
| 86   | HDBW2431EP-S-0280B-S2<br>                                                                                                                                                                                                                                                           | 4MP IR Mini Dome Network Camera<br>1/3" 4Megapixel progressive CMOS<br>SMART H.264/H.265 dual stream encoding<br>4MP (2688 × 1520)@20 fps,2560 × 1440 @25fps<br>Min. Illumination:0.008 Lux @ F1.6<br>2.6 mm Fixed lens<br>WDR(120dB), Day/Night(ICR), 3DNR, AWB, AGC, BLC, HLC, ROI<br>Smart Detection (Tripwire Intrusion)<br>Micro SD memory 256 GB<br>max IR distance:30 m, Smart IR<br>IP67, IK10, PoE                                                                                                                                                                                                              |    | 65,400,000  |
| 87   | HDW2431TP-AS-0280B-S2<br>                                                                                                                                                                          | 4MP Lite IR Fixed-focal Eyeball Network Camera<br>1/3" CMOS image sensor, Outputs 4MP (2560 × 1440)@25/30 fps<br>H.265 coding, SMART H.264+/H.265+, Fixed Lens 2.8mm<br>Min. Illumination 0.008 Lux @ F1.6<br>WDR(120db), 3D NR, HLC, BLC, digital watermarking,<br>Intelligent detection: Intrusion, tripwire<br>Max. 256 GB SD card and built-in Mic ,12V DC/POEIP67                                                                                                                                                                                                                                                   |    | 69,000,000  |
| 88   | HDW2431TMP-AS-0280B-S2<br>                                                                                                                                                                                                                                                        | 4MP WDR IR Eyeball Network Camera, <b>Starlight</b><br>1/3" 4Megapixel progressive CMOS<br>SMART H.264/H.265 dual stream encoding<br>4MP (2688 × 1520)@20 fps,2560 × 1440 @25fps<br>Min. Illumination:0.008 Lux@F1.6<br>2.8 mm Fixed lens<br>WDR(120dB), Day/Night(ICR), 3DNR, AWB, AGC, BLC, HLC, ROI<br>Smart Detection (Tripwire Intrusion)<br>Micro SD memory 256 GB, Built in Mic<br>max IR distance:30 m, Smart IR<br>IP67, PoE                                                                                                                                                                                    |   | 70,150,000  |
| 89   | IPC-HDW1639T-A-IL<br>    | 6MP Entry Smart Dual Light Fixed-focal Eyeball Network Camera<br>1/2.7" Progressive CMOSsensor, max. 6MP@20 fps, and 4MP@25/30 fps, 2.8mm Fixed Lens, HFoV 110°<br>Built-in Multi-core Light, IR 30m warmlight 30m, 0.007 lux@F1.6 (Color, 30 IRE); 0.0007 lux@F1.6 (B/W, 30 IRE); 0 lux (Illuminator on)<br>DWDR, HLC, BLC, 3D DNR, Rol, AGC, AWB<br>Human Detection, 2 Streams, H.265+, Smart Codec, Smart Dual Light, Built-in Mic<br>12VDC, IP67, Metal Case, easy for installation                                                                                                                                  |  | 68,400,000  |
| 90   | HDBW1431EP-0280B-S4                                                                                                                                                                                                                                                                                                                                                  | 4MP Entry IR Fixed-focal Dome 1/3" CMOS image sensor Network, low illuminance<br>Min. Illumination : 0.03 Lux @ F2.0 ,Illumination Distance : 30 m(3 IR LED), S/N Ratio > 56db<br>Lens Fixed-focal 2.8 mm , Horizontal: 93° / Vertical: 53° / Diagonal: 111°<br>Smart H.265+, H.265, Smart H.264+, H.264<br>Main Stream: 2688 × 1520 (20 fps) , high compression rate, ultra-low bit rate<br>WDR (120db), 3D DNR, HLC, BLC, AWB, AGC, Rol(4 years), Smart Illumination<br>Storage(FTP, SFTP, NAS) , ROM : 128MB, RAM : 512MB<br>12V DC/POE (802.3af), Power Consumption < 5.5W, 1 port RJ-45 (10/100 Base-T) ,IP67, IK10 |  | 59,850,000  |
| 91   | HDW1431T1P-A-0360B-S4<br>                                                                                                                                                                                                                                                         | 4MP Entry IR Fixed-focal Eyeball Network Camera<br>1/3"4Megapixel progressive CMOS,<br>Fixed-focal 3.6mm<br>20fps@4.1M(2688×1520) & 25fps@4M(2560×1440)<br>H.265+/H.265/H.264+/H.264 dual-stream encoding<br>WDR(120dB), Day/Night(ICR), Image flip, 3D DNR, HLC, BLC, digital watermar<br>Support ROI,Built-in Mic<br>Max. IR LEDs Length 30m, IP67, PoE                                                                                                                                                                                                                                                                |  | 60,500,000  |
| 92   | HDW1431T1P-0280B-S4-S5                                                                                                                                                                                                                                                                                                                                               | 4MP Entry IR Fixed-focal Eyeball Network Camera<br>1/3"4Megapixel progressive CMOS<br>20fps@4.1M(2688×1520) & 25fps@4M(2560×1440)<br>H.265+/H.265/H.264+/H.264 dual-stream encoding<br>WDR(120dB), Day/Night(ICR), 3DNR, AWB, AGC, BLC, HLC<br>Support ROI<br>Max. IR LEDs Length 30m, IP67, PoE                                                                                                                                                                                                                                                                                                                         |  | 54,250,000  |

| مدل ردیف                       | مشخصات فنی                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | تصویر                                                                                 | قیمت (ریال) |
|--------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|-------------|
| 93 DH-IPC-HDW2249TP-S-IL-0280B | <p>2MP Smart Dual Illumination Fixed-focal Eyeball WizSense Network Camera</p> <p>2-MP 1/2.8" CMOS image sensor, low luminance</p> <p>Min. Illumination : 0.0002 lux@F1.6 (B/W, 30 IRE) , Fixed Lens 2.8 mm</p> <p>Outputs max. 2 MP (1920 × 1080)@25/30 fps</p> <p>Smart Codec : Smart H.265+, Smart H.264+, H.264H, H.265, H.264, H.264B</p> <p>SMD Plus, Intrusion, tripwire (accurate detection of vehicle and human).</p> <p>Supports max. 256G Micro SD card, <b>built in MIC</b>.</p> <p>ROI, WDR, 3D NR, HLC, BLC, digital watermarking</p> <p>Built-in warm light/IR LED : 30m/30m</p> <p>12 VDC/PoE power supply, easy for installation, IP67</p> |    | 65,400,000  |
| 94 HDW2231TMP-AS-S2            | <p>2MP WDR IR Eyeball Network Camera, <b>Starlight</b></p> <p>1/2.8" 2Megapixel progressive CMOS</p> <p>Min. Illumination:0.002 Lux@F1.6</p> <p>Outputs max. 2MP (1920 × 1080) @25/30 fps</p> <p>2.8mm Fixed lens</p> <p>SMART H.264/H.265 dual-stream encoding</p> <p>IVS(Tripwire, intrusion)</p> <p>WDR(120dB), Day/Night(ICR), 3DNR, AWB, AGC, BLC, HLC, RoI</p> <p>Built-in Mic, Micro SD memory 256GB</p> <p>Max. IR LEDs Length 30m, Smart IR, IP67, PoE</p>                                                                                                                                                                                         |    | 55,800,000  |
| 95 IPC-HDW2231TP-AS-0280B-S2   | <p>2MP Lite IR Fixed-focal Eyeball Network Starlight Camera</p> <p>2MP, 1/2.8" Progressive CMOS</p> <p>low illuminance 0.002 Lux @F1.6</p> <p>high image definition 2MP@25/30fps</p> <p>2.8mm fixed lens</p> <p>SMART H.264+/H.265+</p> <p>IVS Intrusion/Tripwire</p> <p>WDR (120db), 3D DNR, HLC, BLC, AWB, AGC, RoI, Smart Illumination, Day/Night ICR Auto Switch</p> <p>Micro SD 256GB, Built-in Mic</p> <p>12V, PoE, IP67, 2 IR LEDs 30m Distance, Onvif Profile S/G/T</p>                                                                                                                                                                             |    | 55,050,000  |
| 96 IPC-HDW2230T-AS-S2          | <p>2MP IR Eyeball Network Camera</p> <p>2MP, 1/2.7" Progressive CMOS</p> <p>low illuminance 0.005 Lux @ F1.6</p> <p>high image definition 2MP@25/30fps</p> <p>2.8mm fixed lens</p> <p>SMART H.264+/H.265+</p> <p>IVS Intrusion, Tripwire</p> <p>Micro SD 256GB, Built-in Mic</p> <p>DWDR, 3D DNR, HLC, BLC, AWB, AGC, RoI, Smart Illumination, Day/Night ICR Auto Switch</p> <p>12V, PoE, IP67, 2 IR LEDs 30m Distance, Onvif Profile S/G/T</p>                                                                                                                                                                                                             |    | 47,850,000  |
| 97 IPC-HDBW2230E-S-S2          | <p>2MP Lite IR Fixed-focal Dome Network Camera</p> <p>2MP, 1/2.7" Progressive CMOS</p> <p>low illuminance 0.005' Lux @F1.6</p> <p>high image definition 2MP@25/30fps</p> <p>2.8mm Fixed Lens</p> <p>SMART H.264+/H.265+</p> <p>IVS Tripwire; intrusion</p> <p>Micro SD 256GB</p> <p>DWDR, 3D DNR, HLC, BLC, AWB, AGC, RoI, Smart Illumination, Day/Night ICR Auto Switch</p> <p>12V, PoE, IP67, 3 IR LEDs 30m Distance, Onvif Profile S/G/T</p>                                                                                                                                                                                                             |  | 47,600,000  |
| 98 HDW1530TP-0280B-S6          | <p>5MP Entry IR Fixed-focal Eyeball Network Cam</p> <p>1/2.7" CMOS image sensor</p> <p>low illuminance 0.003 Lux @F2</p> <p>Outputs max. 5MP (2880 × 1620) @20</p> <p>H.265 code, SMART H.264 +/H.265</p> <p>DWDR, 3D NR, HLC, BLC, digital watermarking</p> <p>Built-in MIC, 12 V DC/PoE power supply</p>                                                                                                                                                                                                                                                                                                                                                  |  | 64,700,000  |
| 99 IPC-HDW1439V-A-IL           | <p><b>NEW</b></p> <p>4MP Entry Smart Dual Light Fixed-focal Eyeball Network Camera</p> <p>4-MP 1/2.9" Progressive CMOS, max. 4 MP (2560 × 1440)@25/30 fps, 2.8 mm: H: 94°; V: 52°; D: 111°</p> <p>Min. Illumination 0.006 lux@F1.6 (Color, 30 IRE) 0.0006 lux@F1.6 (B/W, 30 IRE) 0 lux (Illuminator on)</p> <p><b>Human Detection</b>, Smart Dual Light 30m, <b>Built in Mic</b>, easy for installation</p> <p>WDR 120db, BLC, HLC, 3D DNR, AWB, AGC, ROI, SMART H.264 +/H.265+</p> <p>IP67, 12 VDC/PoE, Metal+plastic</p>                                                                                                                                  |  | 62,900,000  |
| 100 DH-IPC-HDW1239T1P-A-IL-S6  | <p><b>NEW</b></p> <p>2MP Entry Smart Dual Light Fixed-focal Eyeball Network Camera</p> <p>2-MP 1/2.8" Progressive CMOS, max. 2MP@25/30fps, 2.8 mm: H: 103°; V: 55°; D: 123°</p> <p>Min. Illumination 0.005 lux@F1.6 (Color, 30 IRE); 0.0005 lux@F1.6 (B/W, 30 IRE); 0 lux (Illuminator on)</p> <p>DWDR, 3D NR, HLC, BLC, AWB, AGC, ROI, SMART H.264+/H.265+</p> <p><b>Human Detection</b>, Smart Dual Light 30m, Built-in Mic</p> <p>IP67, 12 VDC/PoE, Metal + Plastic</p>                                                                                                                                                                                  |  | 47,950,000  |
| 101 DH-IPC-HDW1239T1-A-LED-S5  | <p>2MP Lite Full-color Fixed-focal Eyeball Network Camera</p> <p>Outputs max. 2MP (1920 × 1080) @25/30 fps</p> <p>H.265 codec, high compression rate, ultra-low bit rate</p> <p>Min. Illumination : 0.005 Lux @F1.6,</p> <p>Built-in LEDs, max LED distance: 15 m, <b>built in MIC</b></p> <p>ROI, SMART H.264/H.265, flexible coding, applicable to various</p> <p>Rotation mode, DWDR, 3D DNR, HLC, BLC, digital watermarking,</p> <p>12V DC/PoE power support, IP67 protection</p>                                                                                                                                                                       |  | 47,850,000  |

| رقم | نموذج                          | مواصفات فنية                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | تصوير                                                                                 | سعر (ريال)  |
|-----|--------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|-------------|
| 102 | DH-IPC-HDW1239T1-LED-0360B-S5  | <p>2 MP Entry Full-color Fixed-focal Bullet Network Camera</p> <p>2MP, 1/2.8" Progressive CMOS</p> <p>low illuminance 0.005 Lux @F1.6</p> <p>high image definition 2MP@25/30fps</p> <p>3.6mm fixed lens</p> <p>Smart H.265+/Smart H.264+</p> <p>DWDR/BLC/HLC/AWB/AGC/3D DNR/ROI, Smart Illumination</p> <p>12V, PoE, IP67, 1 Warmlight LED 30m Distance, Onvif Profile S/T</p>                                                                                                                                                                                                                                                  |    | 42,200,000  |
| 103 | DH-IPC-HDW1239T1P-LED-0280B-S5 | <p>2 MP Entry Full-color Fixed-focal Bullet Network Camera</p> <p>2MP, 1/2.8" Progressive CMOS</p> <p>low illuminance 0.005 Lux @F1.6</p> <p>high image definition 2MP@25/30fps</p> <p>2.8mm fixed lens</p> <p>Smart H.265+/Smart H.264+</p> <p>DWDR/BLC/HLC/AWB/AGC/3D DNR/ROI, Smart Illumination</p> <p>12V, PoE, IP67, 1 Warmlight LED 30m Distance, Onvif Profile S/T</p>                                                                                                                                                                                                                                                  |    | 42,200,000  |
| 104 | DH-IPC-HDW1230T1-A-S5          | <p>2MP Entry IR Fixed-Focal Eyeball Network Camera</p> <p>Outputs max. 2MP (1920 × 1080) @25/30 fps</p> <p>H.265 codec, high compression rate, ultra-low bit rate, Min. Illumination : 0.01 Lux @F2.0</p> <p>Built-in efficient IR illuminator, and the max. illumination distance is 30 m</p> <p>ROI, SMART H.264+/H.265+, flexible coding, applicable to various, <b>built in MIC</b></p> <p>Rotation mode, DWDR, 3D NR, HLC, BLC, S/N Ratio 56 dB, digital watermarking</p> <p>12V DC/PoE power supply, IP67 protection</p>                                                                                                  |    | 46,000,000  |
| 105 | HDW1230T1P-0280B-S5            | <p>2MP Entry IR Fixed-Focal Eyeball Network Camera</p> <p>1/2.7" 2Megapixel progressive CMOS</p> <p>SMART H.264/H.265 dual stream encoding</p> <p>max. 2MP (1920 × 1080p) @25/30 fps</p> <p>Min. Illumination:0.01 Lux@F2.0, 2.8 Fixed lens</p> <p>DWDR, Day/Night(ICR), 3DNR, AWB, AGC, BLC, HLC, ROI, EIS</p> <p>max IR distance:30 m, Smart IR, IP67, PoE</p>                                                                                                                                                                                                                                                                |    | 38,300,000  |
| 106 | HDBW1230EP-0360B-S2            | <p>1/2.7" 2Megapixel progressive scan CMOS, 3.6mm fixed lens</p> <p>H.265+/H.265/H.264+/H.264 dual-stream encoding</p> <p>25/30fps@1080P(1920×1080)</p> <p>DWDR, Day/Night(ICR), 3DNR, AWB, AGC, BLC</p> <p>Max. IR LEDs Length 30m, IP67, IK10, PoE</p>                                                                                                                                                                                                                                                                                                                                                                        |   | 43,100,000  |
| 107 | DH-SD29204T-GN                 | <p>1/2.7" 2MP CMOS Sensor, 2.7mm ~ 11mm , 4x Optical Zoom</p> <p>H.264+/H.264 Encoding</p> <p>Max. 25/30fps@1080P, 25/30/50/60fps@720P</p> <p>WDR, Day/Night(ICR), Ultra DNR, Auto iris, Auto focus</p> <p>Max 100°/s pan speed, 360° endless pan rotation</p> <p>Up to 300 presets, 5 auto scan, 8 tour, 5 pattern</p> <p>Built-in Mic, IR Distance up to 30m, POE, (Tripwire Intrusion   Scene Change   Face  Abandoned-Missing Object)</p>                                                                                                                                                                                   |  | 115,650,000 |
| 108 | DH-SD1A203T-GN                 | <p>1/2.8" 2MP STARVIS™ CMOS (Starlight)</p> <p>H.265+/H.265/H.264+/H.264 Triple-streams encoding</p> <p>Max. 25/30fps@1080P, 2.7mm ~ 8.1mm , 3x Optical Zoom</p> <p>WDR(120dB), Day/Night(ICR), Ultra DNR, Auto iris, Auto focus</p> <p>Max Pan: 80° /s; Tilt: 40° /s speed</p> <p>Pan: 0° ~ 355°; Tilt: 5° ~ 90° rotation</p> <p>Up to 300 presets, 5 auto scan, 8 tour, 5 pattern, Support Defog, IR Distance up to 15m, IP 66, support POE</p> <p>(Tripwire Intrusion Abandoned Missing Face Detection)</p>                                                                                                                  |  | 118,000,000 |
| 109 | SD3A205-GNP-PV                 | <p>2MP Starlight IR AI WizSense Network PTZ Camera</p> <p>H.265; H.264B; H.264M; H.264H; MJPEG; MJPEG (Sub Stream); H.265+; H.264+</p> <p>Focal Length 2.7 mm~13.5 mm, Optical Zoom 5x</p> <p>Tripwire and intrusion, Deep-learning-based perimeter protectionm SMD Plus</p> <p>IR distance up to 30m</p> <p>Starlight technology</p> <p>Up to 300 presets</p> <p>DWDR, HLC, BLC, AGC, AWB, 2D/3D DNR, Day/Night Auto (ICR), ROI, Defog</p> <p>Built-in Mic, Built-in Speaker, Two Way Audio</p> <p>ONVIF Profile S&amp;G&amp;T; CGI</p> <p>IP66; TVS 2000V lightning proof; surge protection; voltage transient protection</p> |  | 153,900,000 |
| 110 | DH-SD6CE230U-HNI               | <p>1/2.8" 2MP STARVIS™ CMOS</p> <p>H.265+/H.265/H.264+/H.264 Encoding</p> <p>Max. 50/60fps@1080P</p> <p>4.5mm~135mm Powerful 30x optical zoom</p> <p>Max 200°/s pan speed, 360° endless pan rotation</p> <p>WDR(120db), Day/Night(ICR), Ultra DNR, BLC, HLC</p> <p>Auto-tracking, Tripwire, Intrusion, Abandoned/Missing, Face Detection, Heat Map), Support Defog, ROI, EIS</p> <p>Up to 300 presets, 8 tour, 5 pattern, Auto scan, Auto Pan</p> <p>Alarm 7/2 in/out, Audio 1/1 in/out, 1*Video output</p> <p>RS485, IR Distance up to 200m, PoE+, IP67, IK10</p>                                                              |  | 542,000,000 |

| مدل ردیف              | مشخصات فنی                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | تصویر                                                                                 | قیمت (ریال) |
|-----------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|-------------|
| 111 DH-SD6CE245XA-HNR | <p>2MP 45x Starlight IR WizSense Network PTZ Camera<br/>1/2.8" 2Megapixel STARVIS™ CMOS<br/>H.265+/H.265/H.264+/H.264 Triple-streams encoding<br/>Minimum Illumination:Color(0.005Lux@F1.6), B/W(0.0005Lux@F1.6)<br/>Max. 50/60fps@1080P, 3.95mm~177.7mm Focal Length<br/>45x optical zoom<br/>WDR(120dB), Day/Night(ICR), 2D/3D DNR, BLC, HLC, AGC, AWB<br/>Auto-tracking, Perimeter protection, Face detection, SMD Plus<br/>Tripwire and intrusion, alarm triggering by target types (human and vehicle)<br/>Support Defog, ROI<br/>Up to 300 presets,8 tour, 5 pattern, Auto scan, Auto Pan<br/>1*Video output, Rs485<br/>7/2 Alarm in/out, 1/1 Audio in/out<br/>IR Distance up to 250m, PoE+, IP67, IK10</p>                                                                                                                                                                                                                                                               |    | 765,150,000 |
| 112 DH-SD6CE245U-HNI  | <p>2MP 45x Starlight IR PTZ Network Camera<br/>1/2.8" 2Megapixel STARVIS™ CMOS<br/>H.265+/H.265/H.264+/H.264 Triple-streams encoding<br/>Minimum Illumination:Color(0.005Lux@F1.6), B/W(0.0005Lux@F1.6)<br/>Max. 50/60fps@1080P, 3.95mm~177.7mm Focal Length<br/>45x optical zoom<br/>WDR(120dB), Day/Night(ICR), Ultra DNR, BLC, HLC, AGC, AWB<br/>Auto-tracking and IVS(Tripwire, Intrusion,Abandoned/Missing, Face Detection, Heat Map)<br/>Support Defog, ROI, EIS<br/>Up to 300 presets,8 tour, 5 pattern, Auto scan, Auto Pan<br/>1*Video output, Rs485<br/>7/2 Alarm in/out, 1/1 Audio in/out<br/>IR Distance up to 250m, PoE+, IP67, IK10</p>                                                                                                                                                                                                                                                                                                                           |    | Call        |
| 113 SD5A245XA-HNR     | <p>2MP 45x Starlight IR WizSense Network PTZ Camera<br/>1/2.8" 2Megapixel STARVIS™ CMOS<br/>H.265; H.265+; H.264+; H.264; MJPEG (Sub Stream)<br/>Max. 50/60 fps@1080P<br/>Pan/Tilt Range Pan: 0°~360°; Tilt: -15°~+90°<br/>Manual Control Speed Pan: 0.1°/s~240°/s; Tilt: 0.1°/s~120°/s<br/>WDR(120db), HLC, BLC, 2D/3D DNR, ROI, EIS, Defog, AWB, AGC, Privacy Masking, Day/Night Auto<br/>Auto Tracking, SMD Plus, Intrusion, Tripwire, Object Abandoned/Missing, Face Detection<br/>Up to 300 presets,8 tour, 5 pattern, Auto scan, Auto Pan<br/>Alarm I/O 2/1, Audio I/O 1/1, Supports Two Way Talk<br/>Focal Length 3.95 mm~177.7 mm, Min. Illumination Color: 0.005 Lux@F1.6 B/W: 0.0005 Lux@F1.6 0 Lux (IR on)<br/>IR distance up to 150 m, 45x optical zoom<br/>ONVIF Profile S&amp;G&amp;T, DC 24V/2.5A ± 25%; PoE+ (802.3at), Operating Temperature -40°C to +70°C<br/>IP67; IK10; TVS 6000V lightning protection; surge protection; voltage transient protection</p> |    | 749,200,000 |
| 114 DH-SD5A232XB-HNR  | <p>2MP 32x Starlight IR WizSense Network PTZ Camera<br/>1/2.8" 2Megapixel STARVIS™ CMOS<br/>32x optical zoom,Max. 50/60 fps@2M<br/>Min Illumination Color: 0.005 lux@F1.6,Focal Length 4.8 mm~154 mm<br/>Smart H.265+; H.265; Smart H.264+; H.264B<br/>Face detection ,tracking and perimeter protection,SMD PLUS<br/>IR distance up to 150 m,PoE+, IP67, IK10<br/>WDR(120db), Day/Night(ICR), 3DNR, AWB, AGC, BLC</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |  | 649,200,000 |
| 115 DH-SD5A232XA-HNR  | <p>1/2.8" 2Megapixel STARVIS™ CMOS<br/>H.265+/H.265/H.264+/H.264 Triple-streams encoding<br/>Max. 50/60fps@1080P, 4.9mm~156mm 32x optical zoom<br/>Max 400°/s pan speed, 360° endless pan rotation<br/>WDR(120db), Day/Night(ICR), Ultra DNR(2D/3D), BLC, HLC<br/>Support Defog, ROI, Auto-tracking and IVS(Tripwire, Intrusion,Abandoned/Missing, Face Detection)<br/>Up to 300 presets,8 tour, 5 pattern, Auto scan, Auto Pan<br/>Alarm 2/1 in/out, Audio 1/1 in/out<br/>IR Distance up to 150m, PoE+, IP67, IK10</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                         |  | 649,200,000 |
| 116 DH-SD49425ZB-HNR  | <p>4MP 25x Starlight IR WizSense Network PTZ Camera, Image Sensor: 1/2.8" STARVIS™ CMOS<br/>1/2.8" 4Megapixel CMOS, Powerful 25x optical zoom, ROM: 4GB, RAM: 1GB<br/>Starlight technology, Max.25/30fps@4M, Illuminator Number: 4<br/>Focal Length: 4.8 mm~120 mm, Field of View: H: 60.0°~2.5°; V: 30.8°~2.2°; D: 66.7°~2.9°<br/>Min. Illumination: Color: 0.005Lux@F1.6, B/W: 0.0005Lux@F1.6: 0Lux@F1.6 (IR light on)<br/>Illuminator On/Off Control: Zoom Prio/Manual/SmartIR<br/>Perimeter protection, Face Detection, Smart Capture, SMD PLUS, IVS: Object Abandoned/Missing<br/>Support PoE+, IR distance up to 100m, BLC, WDR 120db, HLC, AGC, ANR, ROI, Electronic Defog<br/>Pan: 0.1°~200°/s, Tilt: 0.1°~120°/s, Presets: 300, Tour: 8 (up to 32 presets per tour), Pattern: 5, Scan: 5<br/>IP66, DC 12V/3A, PoE+ (802.3at) Audio Input: 1, Audio Output: 1, Alarm I/O: 2/1</p>                                                                                       |  | 426,100,000 |

| مدل ردیف             | مشخصات فنی                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | تصویر                                                                                 | قیمت (ریال) |
|----------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|-------------|
| 117 SD49425XB-HNR    | <p>4MP 25x Starlight IR WizSense Network PTZ Camera<br/>1/2.8" STARVIS™ Progressive CMOS<br/>H.265+/H.265/H.264+/H.264/MJPEG (sub stream)<br/>Max.25/30fps@4M, 960P, 720P<br/>4.8mm~120mm 25x optical zoom<br/>Max 240°/s pan speed, 360° endless pan rotation<br/>WDR(120dB), Day/Night(ICR)(Color/B/W), Ultra DNR(2D/3D), BLC, HLC, AWB, AGC, Auto iris, Auto focus<br/>IVS(Tripwire, Intrusion, Abandoned/Missing, Face Detection, Human, Vehicle, SMD Plus, Region of Interest)<br/>False Alarm Avoidance for Animals, Leaves, Bright Light<br/>Support Defog and EIS<br/>Up to 300 presets, 8 tour, 5 pattern, Auto scan, Auto Pan<br/>Built-in 2/1 Alarm in/out, Audio 1/1 in/out, Support PoE+</p> <p><b>STARLIGHT</b> <b>WizSense</b></p>                                                                                                                 |    | 426,100,000 |
| 118 SD49225XA-HNR-S3 | <p>2MP 25x Starlight IR WizSense Network PTZ Camera<br/>1/2.8" 2Megapixel STARVIS™ CMOS ,<br/>25x optical zoom, Min Illumination Color: 0.005 lux@F1.6<br/>Max. 25/30 fps@1080p<br/>IR distance up to 100 m , Perimeter protection, Face detection, SMD Plus, IP66<br/>Pan: 0° to 360° endless, Tilt: -15° to +90°, auto flip 180° , Pan: 200°/s; Tilt: 100°/s<br/>Smart H.265+; H.265; Smart H.264+; H.264B; H.264M; H.264H; MJPEG (Sub Stream)<br/>Tripwire and intrusion. Support alarm triggering by target types (human and vehicle)<br/>WDR(120dB), Day/Night(ICR)(Color/B/W), Ultra DNR(2D/3D), BLC, HLC, AWB, AGC</p> <p><b>STARLIGHT</b> <b>WizSense</b></p>                                                                                                                                                                                             |    | 350,700,000 |
| 119 SD49225XA-HNR    | <p>2MP 25x Starlight IR PTZ AI Network Camera<br/>1/2.8" STARVIS™ CMOS<br/>H.265+/H.265/H.264+/H.264/MJPEG (sub stream)<br/>Max. 1~60fps@1080P, 960P, 720P<br/>4.8mm~120mm 25x optical zoom<br/>Max 240°/s pan speed, 360° endless pan rotation<br/>WDR(120dB), Day/Night(ICR)(Color/B/W), Ultra DNR(2D/3D), BLC, HLC, AWB, AGC, Auto iris, Auto focus<br/>IVS(Tripwire, Intrusion, Abandoned/Missing, Face Detection, Human, Vehicle, SMD Plus, Region of Interest)<br/>False Alarm Avoidance for Animals, Leaves, Bright Light<br/>Support Defog and EIS<br/>Up to 300 presets, 8 tour, 5 pattern, Auto scan, Auto Pan<br/>Built-in 2/1 Alarm in/out, Audio 1/1 in/out, Support PoE+</p> <p><b>STARLIGHT</b> <b>WizSense</b></p>                                                                                                                                |    | 350,700,000 |
| 120 SD49225DB-HNY    | <p>2MP 25x Starlight IR Network PTZ Camera<br/>1/2.8" 2Megapixel STARVIS™ CMOS<br/>Powerful 25x optical zoom - Focal Length 4.8 mm~120 mm<br/>Max. 25/30 fps@1080p<br/>Min. Illumination Color: 0.005 lux@F1.6 B/W: 0.0005 lux@F1.6 0 lux (IR light on)<br/>Illumination Distance 100 m (328.08 ft) (IR) Max. Aperture F1.6~F3.5 Smart IR - 4 IR - S/N Ratio ≥ 55 dB<br/>IVS (Perimeter Protection) : Tripwire , intrusion / SMD Plus / Face Detection / Motion Detection<br/>Smart H.265+; H.265; Smart H.264+; H.264B; H.264M; MJPEG (Sub Stream)<br/>WDR 120db, Day/Night Auto (ICR)/Color/B/W, HLC, BLC, AWB, AGC, 2D DNR, 3D DNR, RoI, EIS, Defog<br/>Up to 300 presets, 8 tour, 5 pattern, Auto scan, Auto Pan<br/>Alarm in/out 2/1, Audio in/out 1/1, 12 VDC/3 A, PoE+, IP66, FTP/ Micro SD card (512 GB)/ NAS</p> <p><b>STARLIGHT</b> <b>WizSense</b></p> |  | 350,700,000 |
| 121 SD49225ZB-HNR    | <p>1/2.8" 2Megapixel STARVIS™ CMOS<br/>Powerful 25x optical zoom - Focal Length 4.8 mm~120 mm<br/>Max. 25/30 fps@1080p -<br/>Min. Illumination Color: 0.005 lux@F1.6 / B/W: 0.0005 lux / 0 lux (IR light on)<br/>IVS (Perimeter Protection) : Tripwire , intrusion / SMD Plus / Face Detection / Motion Detection<br/>Smart H.265+; H.265; Smart H.264+<br/>WDR(120dB), DNR(2D/3D), BLC, HLC, AWB, AGC , RoI , Electronic Defog<br/>IR distance up to 100 m - Smart IR - 4 IR - S/N Ratio ≥ 55 dB<br/>Presets 300 / Tour 8 (up to 32 presets per tour) / Pattern 5 / Scan 50<br/>Alarm I/O : 2/1 - IP66 - Power Supply 12 VDC, 3 A - PoE+<br/>Storage : FTP/ Micro SD card (512 GB)/ NAS</p> <p><b>STARLIGHT</b></p>                                                                                                                                              |  | 350,700,000 |
| 122 SD49425GB-HNR    | <p>4MP 25x Starlight IR Network PTZ Camera<br/>1/2.8" STARVIS™ CMOS<br/>25x optical zoom, Focal Length 5 mm~125 mm<br/>Starlight technology, Min. Illumination Color: 0.005 lux@F1.6 B/W: 0.0005 lux@F1.6 0 lux@F1.6 (IR light on)<br/>Max. 25/30fps@4M.<br/>IR distance up to 100 m<br/>Up to 300 presets, 5 auto scan, 8 tour, 5 pattern<br/>Perimeter protection, Face detection, SMD 4.0, Acupick<br/>IP66, Audio I/O 1/1, Alarm I/O 2/1</p> <p><b>STARLIGHT</b> <b>ACUPICK</b></p>                                                                                                                                                                                                                                                                                                                                                                           |  | 426,100,000 |


| ردیف | مدل              | مشخصات فنی                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | تصویر                                                                                 | قیمت (ریال) |
|------|------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|-------------|
| 123  | SD59430U-HNI     | <p>1/3" CMOS Sensor<br/>H.265+/H.265/H.264+/H.264 Encoding, Ultra-low bit rate<br/>Max. 25/30fps@4M(2592×1520) &amp; 50/60fps @1080P resolution<br/>WDR, Day/Night(ICR), Ultra DNR, Auto iris, Auto focus<br/>4.5mm ~ 135.0mm , 30x Optical Zoom<br/>Max 400°/s pan speed, 360° endless pan rotation<br/>Up to 300 presets, 5 auto scan, 8 tour, 5 pattern<br/>Micro SD card memory , 64 GB<br/>Audio In/Out, Alarm In/Out, IP66, POE+<br/>IR Distance up to 100m(AC24V)/ 80m(DC12V)<br/>Smart Detection (Tripwire Intrusion   Scene Change   Face  Anandoned-Missing Object)</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |    | 557,900,000 |
| 124  | SD5A432XB-HNR    | <p>4MP 32x Starlight IR WizSense Network PTZ Camera<br/>1/2.8" 4Megapixel STARVIS™ Progressive CMOS<br/>H.265+, H.264+, H.265, H.264, MJPEG(Sub Stream) 3 Stream, Max. 25/30fps@4M<br/>Min. Illumination Color: 0.005 Lux@F1.35, B/W: 0.0005 Lux@F1.6, 0 Lux (IR on)<br/>4.8 mm–154 mm Powerful 32x optical zoom, Max. Aperture F1.35–F4.4<br/>Support human, motor vehicle and non-motor vehicle image capture<br/>Tripwire and intrusion. Support alarm triggering by target types (human and vehicle)<br/>Support filtering false alarms caused by animals, rustling leaves, bright lights, etc.<br/>Pan: 0° to 360° endless , Tilt: –15° to +90°, auto flip 180° , Pan: 0.1°–300°/s , Tilt: 0.1°–200°/s<br/>WDR(120), EIS, Defog, Rol,2D DNR, 3D DNR, HLC, BLC, AWB, AGC,<br/>Alarm I/O : 2/1 , Audio I/O : 1/1, PoE+, IP67; IK10; TVS 6000 V</p>                                                                                                                                                                                                                                     |    | 701,350,000 |
| 125  | DH-SD5A432GB-HNR | <p>4MP 32x Starlight IR WizSense Network PTZ Camera<br/>Image Sensor 1/2.8" CMOS, Max. Resolution 2560 (H) × 1440 (V)<br/>Electronic Shutter Speed 1/1 s–1/30,000 s, Min. Illumination, Color: 0.005 lux@F1.6, B/W: 0.0005 lux@F1.6<br/>Illumination Distance 150 m(IR), Focal Length 4.8 mm–154 mm<br/>Manual Control Speed Pan: 0.1°/s–300°/s, Tilt: 0.1°/s–200°/s<br/>Preset 300, Tour 8 (up to 32 presets per tour), Pattern 5, Scan 5<br/>Perimeter Protection, Face Detection, Auto Tracking, Quick Pick, SMD<br/>BLC, WDR 120 db, WB, AGC, ANR, Rol, EIS, Defog Electronic, S/N Ratio ≥55 dB<br/>Storage : FTP, Micro SD card (512 GB); NAS, Alarm I/O 2/1, Audio I/O 1/1<br/>Power Supply 24 VDC, 2.5 A (± 25%), Operating Temperature –40 °C to +70 °C</p>                                                                                                                                                                                                                                                                                                                       |    | 733,200,000 |
| 126  | SD5A432XA-HNR    | <p>4MP 32x Starlight IR WizSense Network PTZ Camera<br/>1/2.8" 4Megapixel STARVIS™ Progressive CMOS<br/>H.265+, H.264+, H.265, H.264, MJPEG(Sub Stream) 3 Stream, Max. 25/30fps@4M<br/>Min. Illumination Color: 0.005 Lux@F1.35, B/W: 0.0005 Lux@F1.35, 0 Lux (IR on)<br/>4.9 mm–156 mm Powerful 32x optical zoom, Max. Aperture F1.35–F4.4<br/>Max Presets Speed: Pan: 400°/s Tilt: 300°/s, Pan: 0°–360° endless rotation<br/>WDR(120), EIS, Defog, Rol,2D DNR, 3D DNR, HLC, BLC, AWB, AGC, Day/Night Auto ICR<br/>Deep Learning, Auto Track, Tripwire, intrusion, Object Abandoned/Missing, SMD Plus, Face Detection, human/motor vehicle/non-motor vehicle Classification, Animals/Leaves/Light False Alarm Filtering<br/>Up to 300 presets, 8 tour, 5 pattern, Auto scan, Auto Pan<br/>Micro SD card (256G), 1/1 Audio I/O, 2/1 Alarm I/O, ONVIF Profile S&amp;G&amp;T<br/>IR distance up to 150m, DC 24 V/2.5 A, PoE+, IP67, IK10, 6000V lightning proof; surge protection; voltage transient protection</p>                                                                         |   | 682,500,000 |
| 127  | SD5A445GB-HNR    | <p>4MP 45x Starlight IR Network PTZ Camera<br/>1/2.8" 4Megapixel STARVIS™ Progressive CMOS<br/>H.264H; H.264B; Smart H.265+; H.264; H.265; MJPEG(Sub Stream); Smart H.264+<br/>Min. Illumination Color: 0.005 lux@F1.6 B/W: 0.0005 lux@F1.6 0 lux (IR light on)<br/>3.95 mm–177.75 mm 45x optical zoom Starlight technology IR distance up to 150 m<br/>WDR(120), EIS, Defog, Rol,2D DNR, 3D DNR, HLC, BLC, AWB, AGC, Day/Night Auto ICR<br/>Perimeter protection, Face detection, SMD 4.0, Quick Pick, Auto-tracking 3.0<br/>Up to 300 presets, 8 tour, 5 pattern, Auto scan, Auto Pan<br/>Alarm in/out 2/1, Audio in/out 1/1, IP67, IK10, TVS 6000V lightning proof; surge protection; voltage transient protection</p>                                                                                                                                                                                                                                                                                                                                                                 |  | 876,750,000 |
| 128  | SD5A445XA-HNR-1T | <p>4MP 45x Starlight IR DHOP Network PTZ Camera - Max. 25/30 fps@4MP<br/>1/2.8" 4Megapixel STARVIS™ CMOS - Progressive CMOS - ROM : 4GB - RAM : 1GB<br/>1T computing power for enhanced performance - Flash : 350 M - Memory : 300 M<br/>Compression H.265/H.265+/H.264+/H.264/MJPEG(Sub Stream)<br/>Min. Illumination Color: 0.005 Lux@F1.6 / B/W: 0.0005 Lux@F1.6 / 0 Lux (IR light on)<br/>Starlight technology - Illumination Distance : 150 m (492.13 ft) - Illuminator Number : 4<br/>Focal Length 3.95 mm–177.7 mm - Max. Aperture F1.6–F4.95 - Field of View H: 70.3°–1.8°; V: 37°–1°<br/>Pan: 0°–360°; Tilt: –15° +90° / Manual Control Speed : Pan: 0.1°/s–300°/s; Tilt: 0.1°/s–200°/s<br/>Preset Speed : Pan: 400°/s; Tilt: 300°/s - Presets : 300 - Tour 8 (up to 32 presets per tour) - Pattern : 5<br/>WDR(120), HLC, BLC, AWB, AGC, 2D DNR, 3D DNR, ROI, EIS, Electronic Defog<br/>Alarm I/O 2/1 - Audio I/O 1 (Line in; bare wire)/1 (Line out; bare wire) - 1 RJ-45 Port 10/100Base-T<br/>DC 24 V/2.5 A ± 25% - PoE+ (802.3at), 11 W / 20 W (IR light on) IP67, IK10</p> |  | 852,850,000 |

| ردیف | مدل                       | مشخصات فنی                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | تصویر                                                                                 | قیمت (ریال) |
|------|---------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|-------------|
| 129  | SD5A445XA-HNR             | <p>4MP 45x Starlight IR WizSense Network PTZ Camera<br/>1/2.8" 4Megapixel STARVIS™ Progressive CMOS<br/>H.265+/H.265+/H.264+/H.264/MJPEG(Sub Stream) 3 Streams, Max. 25/30fps@4M<br/>Min. Illumination Color: 0.005 Lux@F1.6 B/W: 0.0005 Lux@F1.6 0Lux (IR light on)<br/>3.95 mm~177.7 mm Powerful 45x optical zoom Max. Aperture F1.6~F4.95<br/>Max Presets Speed: Pan: 400°/s Tilt: 300°/s, Pan: 0°~360° endless rotation<br/>WDR(120), EIS, Defog, Rol, 2D DNR, 3D DNR, HLC, BLC, AWB, AGC, Day/Night Auto ICR<br/>Deep Learning, Auto Track, Tripwire, intrusion, Object Abandoned/Missing, SMD Plus, Face Detection, human/motor vehicle/non-motor vehicle Classification, Animals/Leaves/Light False Alarm Filtering<br/>Up to 300 presets, 8 tour, 5 pattern, Auto scan, Auto Pan<br/>Micro SD card (256G), 1/1 Audio I/O, 2/1 Alarm I/O, ONVIF Profile S&amp;G&amp;T<br/>IR distance up to 150m, DC 24 V/2.5 A, PoE+, IP67, IK10, 6000V lightning proof; surge protection</p>                                                                                                 |    | 852,850,000 |
| 130  | SD6CE445XA-HNR            | <p>4MP 45x Starlight IR WizSense Network PTZ Camera<br/>1/2.8" 4Megapixel STARVIS™ Progressive CMOS<br/>H.265+/H.265+/H.264+/H.264/MJPEG(Sub Stream) Max. 25/30fps@4MP<br/>Minimum Illumination Color: 0.005 Lux@F1.6; B/W: 0.0005 Lux@F1.6; 0 Lux@F1.6 (IR on)<br/>3.95 mm~177.75 mm Powerful 45x optical zoom Max. Aperture F1.6~F4.95<br/>Pan/Tilt Range Pan: 0°~360° endless; Tilt: -20°~90°, auto flip 180° Preset Speed Pan: 300° /s ; Tilt: 200° /s<br/>WDR 120db, BLC, HLC, Auto ICR, AWB, AGC, 2D/3D DNR, Rol, EIS, Defog<br/>Deep-learning-based auto tracking and perimeter protection<br/>Face detection, SMD Plus, Tripwire, Intrusion. Human/Vehicle/Motor-non Motor Vehicle Detection<br/>Up to 300 presets, 8 tour, 5 pattern, Auto scan, Auto Pan<br/>Micro SD card (256G), 1/1 Audio I/O, 7/2 Alarm I/O, ONVIF Profile S&amp;G&amp;T<br/>IR distance up to 250m, DC 24 V/2.5 A, PoE+, IP67, IK10</p>                                                                                                                                                                |    | 892,650,000 |
| 131  | DHI-NVR1104HS-S3/H (V2.0) | <p>4 Channel IPC Input, 4K Lite H.265 NVR 1/4 Live &amp; Playback<br/>Smart H.265+/Smart H.264+/H.265/H.264<br/>Network Bandwidth 80 Mbps for access, 80 Mbps for storage and 60Mbps for forwarding.<br/>Up to 8MP Resolution for Preview &amp; Playback<br/>Decoding Capacity : 1-ch@8MP(30FPS) or 1-ch@5MP(30FPS) or<br/>2-ch@4MP(30FPS) or 2-ch@3MP(30FPS) or 4-ch@1080P(30FPS)<br/>Video Output 1 VGA/1 HDMI simultaneous video output, maximum resolution 1080P<br/>1 SATA 2.0 port, up to 8TB<br/>1 front USB 2.0 port, 1 rear USB 2.0 port, 1ch Audio I/O for Two Way Talk Only<br/>1 RJ-45 port (10/100 Mbps), P2P Support, ONVIF(profile T/profile S/profile G)</p>                                                                                                                                                                                                                                                                                                                                                                                                          |    | 45,500,000  |
| 132  | NVR2104HS-P-I             | <p>4 Channel Compact 1U 4PoE WizSense Network Video Recorder, New 4.0 user interface<br/>H.264/H.265/Smart H.264+/Smart H.265+/MJPEG, H.265 auto switch<br/>1 VGA/1 HDMI simultaneous video output, HDMI 4K, non-simultaneous video output is also supported on 1080p<br/>1-channel face detection and recognition (AI by NVR); or 2-channel perimeter detection (AI by NVR); or 4-channel SMD (AI by NVR); up to 10 face databases and 5,000 face images<br/>Max. decoding capability: 4x1080P@30fps. Supports adaptive decoding<br/>Network Bandwidth 80 Mbps for access, 80 Mbps for storage and 60 Mbps for forwarding<br/>Resolution 12M/8M/5M/4M/3M/2M/720P/D1<br/>AI disabled: 1-channel 12MP@30 fps; 1-channel 8MP@30 fps; 2-channel 5MP@30 fps; 3-channel 4MP@30 fps; 6-channel 1080p@30 fps<br/>AI enabled: 1-channel 8MP@30 fps; 1-channel 5MP@30 fps; 2-channel 4MP@30 fps; 4-channel 1080p@30 fps<br/>4 PoE Ports, 1 SATA port, up to 8 TB, 1 front USB 2.0 port, 1 rear USB 2.0 port, 1 RJ-45 port (10/100 Mbps), 4 RJ-45 ports with PoE power supply (10/100 Mbps)</p> |  | 95,650,000  |
| 133  | NVR2104HS-4KS2            | <p>4 channel IP camera input<br/>H.265/H.264 codec decoding<br/>Max 80Mbps incoming bandwidth<br/>Up to 8Mp resolution preview&amp;playback<br/>Up to 1ch@8MP/4ch@1080P decoding<br/>HDMI/VGA simultaneous video output<br/>Support 1 SATA HDD up to 6TB, 2 USB2.0<br/>100 Mbps Network Card, P2P support</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |  | 51,850,000  |
| 134  | NVR2104HS-P-4KS2          | <p>4 channel IP camera input, H.265/H.264 codec decoding<br/>Max 80Mbps incoming bandwidth<br/>Up to 8Mp resolution preview&amp;playback<br/>Up to 1ch@8MP/4ch@1080P decoding<br/>HDMI/VGA simultaneous video output<br/>Support 1 SATA HDD up to 6TB, 2 USB2.0<br/>100 Mbps Network Card, 4PoE Port, P2P support</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |  | 67,900,000  |
| 135  | DHI-NVR1108HS-S3/H        | <p>8 Channel IPC Input, 4K Lite H.265 NVR 1/4/8/9 Live &amp; Playback<br/>Smart H.265+/Smart H.264+/H.265/H.264<br/>Network Bandwidth 80 Mbps for access, 80 Mbps for storage and 60 Mbps for forwarding.<br/>Up to 8MP Resolution for Preview &amp; Playback<br/>Decoding Capacity : 1-ch@8MP(30FPS) or 1-ch@5MP(30FPS) or<br/>2-ch@4MP(30FPS) or 2-ch@3MP(30FPS) or 4-ch@1080P(30FPS)<br/>Video Output 1 VGA/1 HDMI simultaneous video output, maximum resolution 1080P<br/>1 SATA 2.0 port, up to 8TB<br/>1 front USB 2.0 port, 1 rear USB 2.0 port, 1ch Audio I/O for Two Way Talk Only<br/>1 RJ-45 port (10/100 Mbps), P2P Support, ONVIF(profile T/profile S/profile G)</p>                                                                                                                                                                                                                                                                                                                                                                                                     |  | 55,700,000  |

| ردیف | مدل               | مشخصات فنی                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | تصویر                                                                                 | قیمت (ریال) |
|------|-------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|-------------|
| 136  | NVR2108HS-4KS3    | <div>NEW</div> <div>12MP</div> <div>AI</div> <p>8CH Compact 1U 1HDD Lite Network Video Recorder<br/>Smart H.265+, H.265, Smart H.264+, H.264 and MJPEG<br/>decoding capability: 6 × 1080p@30 fps<br/>Max. 80/80/60 Mbps incoming/recording/outgoing bandwidth<br/>Supports IPC up to 12MP<br/>AI by Recorder supports 4-channel SMD<br/>AI by Camera supports perimeter protection and SMD<br/>Supports one-click arming and disarming<br/>1 HDMI, 1 VGA, Audio I/O 1/1(two way talk only), 1 SATA up to 20TB<br/>LAN 10/100, 12 VDC, 1.5 A</p>                                                                                                                                                                                                                                                                                                                   |    | 76,800,000  |
| 137  | NVR2108HS-4KS2    | <div>4K</div> <p>8 channel IP camera input, H.265/H.264 codec decoding<br/>Max 80Mbps incoming bandwidth<br/>Up to 8Mp resolution preview&amp;playback<br/>Up to 1ch@8MP/4ch@1080P decoding<br/>HDMI/VGA simultaneous video output<br/>Support 1 SATA HDD up to 6TB, 2 USB2.0<br/>100 Mbps Network Card, P2P support</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |    | 63,800,000  |
| 138  | NVR2108HS-8P-4KS2 | <div>4K</div> <p>8 channel IP camera input, H.265/H.264 codec decoding<br/>Max 80Mbps incoming bandwidth<br/>Up to 8Mp resolution preview&amp;playback<br/>Up to 1ch@8MP/4ch@1080P decoding<br/>HDMI/VGA simultaneous video output<br/>Support 1 SATA HDD up to 6TB, 2 USB2.0<br/>100 Mbps Network Card, 8Port PoE, P2P support</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |    | 90,250,000  |
| 139  | NVR2108HS-S3      | <p>8 Channel Lite Series, Compact 1U 1HDD Network Video Recorder<br/>Smart H.265+/H.265/Smart H.264+/H.264 decoding format<br/>Max. decoding capability: 6 × 1080p@30 fps. Supports adaptive decoding<br/>AI by camera: perimeter protection, and SMD Plus<br/>Multi-channel Playback Up to 8 channels, HDD Interface 1 SATA port, up to 16 TB<br/>Audio Input/Out : 1/1 , Network Port 1 × RJ-45, 10/100 Mbps<br/>Power Supply 12 VDC, 1.5 A</p>                                                                                                                                                                                                                                                                                                                                                                                                                 |    | 74,250,000  |
| 140  | NVR2108HS-I2      | <div>Wiz Sense</div> <div>AI</div> <p>8 Channel Compact 1U 1HDD WizSense Network Video Recorder<br/>Smart H.265+/H.265/Smart H.264+/H.264/MJPEG decoding format<br/>Max. decoding capability: 6 × 1080p@30 fps. Supports adaptive decoding<br/>1-channel face detection and recognition (AI by NVR)<br/>1-channel perimeter protection (AI by NVR), 4-channel SMD Plus (AI by NVR)<br/>AI by camera: Face detection and recognition, perimeter protection, and SMD Plus<br/>HDD 1 SATA port, up to 10 TB, RCA Input 1, RCA Output 1<br/>Power Supply 12 VDC, 1.5 A, Operating Temperature -10 °C to +55 °C</p>                                                                                                                                                                                                                                                    |    | 92,500,000  |
| 141  | NVR2108HS-I       | <div>Wiz Sense</div> <div>12MP</div> <div>AI</div> <p>8 Channel 12MP WizSense NVR 1/4/8 Live &amp; Playback<br/>Smart H.265+/H.264+/MJPEG<br/>Network Bandwidth 80 Mbps for access, 80 Mbps for storage and 60 Mbps for forwarding<br/>AI Disabled: 1ch 12MP@30fps/1ch 8MP@30fps/2ch 5MP@30fps/3ch 4MP@30fps/6ch 2MP@30fps<br/>AI Enabled : 1ch 8MP@30fps or 1ch 5MP@30fps or 2ch 4MP@30fps or 4ch 2MP@30fps<br/>HDMI/VGA Simultaneous Max Output 4K, non-Simultaneous Max output 1080p<br/>1ch Face Detection and Face Recognition Ai by NVR up to 5000 Face Library<br/>or 2ch Perimeter Ai By NVR or 4ch SMD Plus Ai by NVR, Human/Vehicle Classification<br/>1 SATA II port, up to 8TB<br/>1ch Audio I/O for Two Way Talk Only, 1 front USB 2.0 port, 1 rear USB 2.0 port<br/>1 RJ-45 port (1000Mbps), P2P Support, ONVIF (profile T/profile S/profile G)</p> |  | 92,500,000  |
| 142  | NVR4108HS-4KS2    | <div>4K</div> <p>8 channel IP camera input<br/>1/4/8/9 channel Live Preview, 8CH Playback<br/>H.265/H.264 codec decoding<br/>Max 80Mbps incoming bandwidth<br/>Up to 8MP Resolution for Preview and Playback<br/>HDMI/VGA simultaneous video output<br/>Support 1 SATA HDD up to 6TB, 2 USB2.0<br/>100 Mbps Network Card, P2P support</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |  | 74,950,000  |
| 143  | DHI-NVR2216-4KS2  | <div>4K</div> <p>16 Channel 4K Lite H.265 NVR 1/4 Live &amp; Playback<br/>Dual-core embedded processor, H.265/H.264 codec decoding<br/>Max 80Mbps incoming bandwidth, Up to 1ch@8MP/4ch@1080P decoding<br/>HDMI/VGA simultaneous video output<br/>2 SATA III Ports, up to 6TB capacity for each, Total 12TB<br/>1 front USB 2.0 port, 1 rear USB 2.0 port, 1ch Audio I/O for Two Way Talk Only<br/>1 RJ-45 port (1000Mbps), P2P Support</p>                                                                                                                                                                                                                                                                                                                                                                                                                       |  | 98,900,000  |
| 144  | NVR2116HS-I       | <div>Wiz Sense</div> <div>12MP</div> <div>AI</div> <p>16 Channel 12MP WizSense NVR 1/4/9/16 Live &amp; Playback<br/>Smart H.265+/H.264+/MJPEG<br/>Network Bandwidth 200 Mbps for access, 200 Mbps for storage and 100 Mbps for forwarding<br/>AI Disabled: 1ch 12MP@30fps/1ch 8MP@30fps/2ch 5MP@30fps/3ch 4MP@30fps/6ch 2MP@30fps<br/>AI Enabled: 1ch 8MP@30fps/1ch 5MP@30fps/2ch 4MP@30fps/4ch 2MP@30fps<br/>HDMI/VGA Simultaneous Max Output 4K, non-Simultaneous Max output 1080p<br/>1ch Face Detection and Face Recognition Ai by NVR up to 5000 Face Library<br/>or 2ch Perimeter Ai By NVR or 4ch SMD Plus Ai by NVR, Human/Vehicle Classification<br/>1 SATA II port, up to 8TB<br/>1ch Audio I/O for Two Way Talk Only, 1 front USB 2.0 port, 1 rear USB 2.0 port<br/>1 RJ-45 port (1000Mbps), P2P Support, ONVIF (profile T/profile S/profile G)</p>    |  | 116,500,000 |

| مدل ردیف |                  | مشخصات فنی                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | تصویر                                                                                                                                                                                                                                                         | قیمت (ریال) |
|----------|------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------|
| 145      | NVR2116HS-I2     | <p>16 Channel Compact 1U 1HDD WizSense Network Video Recorder<br/>Smart H.265+/H.265/Smart H.264+/H.264/MJPEG decoding format<br/>Network Bandwidth: AI off: Access: 144 Mbps; Storage: 144 Mbps; Forward: 72 Mbps<br/>AI on: Access: 72 Mbps; Storage: 72 Mbps; Forward: 36 Mbps<br/>Resolution: 12MP; 8MP; 5MP; 4MP; 3MP; 2MP; 720p; D1<br/>Decoding Capability: AI disabled: 1-channel 12MP@30 fps; 1-channel 8MP@30 fps; 2-channel 5MP@30 fps; 3-channel 4MP@30 fps; 6-channel 1080p@30 fps<br/>AI enabled: 1-channel 8MP@30 fps; 1-channel 5MP@30 fps; 2-channel 4MP@30 fps; 4-channel 1080p@30 fps<br/>1 × VGA, 1 × HDMI (simultaneous) 4K Output<br/>1-channel face detection and recognition (AI by NVR); 1-channel perimeter protection (AI by NVR); up to 10 face databases and 5,000 face images; 4-channel SMD Plus (AI by NVR);<br/>AI by camera: Face detection and recognition, perimeter protection, and SMD Plus<br/>1 SATA II port, up to 10TB<br/>1ch Audio I/O for Two Way Talk Only, 1 front USB 2.0 port, 1 rear USB 2.0 port<br/>1 RJ-45 port (1000Mbps), P2P Support, ONVIF (profile T/profile S/profile G)</p> |                                                                                           | 114,850,000 |
| 146      | DHI-NVR2216-I    | <p>16 Channel 12MP WizSense NVR 1/4/9/16 Live &amp; Playback<br/>Smart H.265+/H.264+/MJPEG<br/>Network Bandwidth 200 Mbps for access, 200 Mbps for storage and 100 Mbps for forwarding<br/>AI Disabled: 1ch 12MP@30fps/1ch 8MP@30fps/2ch 5MP@30fps/3ch 4MP@30fps/6ch 2MP@30fps<br/>AI Enabled: 1ch 8MP@30fps/1ch 5MP@30fps/2ch 4MP@30fps/4ch 2MP@30fps<br/>HDMI/VGA Simultaneous Max Output 4K, non-Simultaneous Max output 1080p<br/>1ch Face Detection and Face Recognition AI by NVR up to 5000 Face Library<br/>or 2ch Perimeter AI By NVR or 4ch SMD Plus AI by NVR و Human/Vehicle Classification<br/>2 SATA 2.0 port, up to 8TB each, Total 16TB<br/>1 front USB 2.0 port, 1 rear USB 2.0 port, 1ch Audio I/O for Two Way Talk Only<br/>1 RJ-45 port (1000Mbps), P2P Support, ONVIF (profile T/profile S/profile G)</p>                                                                                                                                                                                                                                                                                                          |                                                                                           | 148,700,000 |
| 147      | DHI-NVR2216-I2   | <p>16 Channel 1U 2HDDs WizSense Network Video Recorder<br/>Smart H.265+/H.265/Smart H.264+/H.264/MJPEG decoding format<br/>Max. decoding capability: 6 × 1080p@30 fps. Supports adaptive decoding<br/>AI by NVR: 1-channel face detection and recognition; 1-channel perimeter protection; up to 10 face databases and 5,000 face images; 4-channel SMD Plus<br/>AI by camera: Face detection and recognition, perimeter protection, and SMD Plus<br/>2 SATA each up to 10TB, 2 USB, 1 HDMI, 1 VGA, 1 LAN 1000Mbps, Audio in/out 1/1, Onvif (S, T, G)</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |                                                                                                                                                                            | 148,700,000 |
| 148      | NVR4116HS-4KS2   | <p>16 Channel Compact 1U 4K&amp;H.265 Lite Network Video Recorder<br/>Smart H.265+/Smart H.264+/H.265/H.264; H.265 auto switch<br/>Max 80Mbps Incoming Bandwidth<br/>Up to 8MP Resolution for Preview and Playback<br/>8-channel decoding@1080p (30 fps)<br/>AI by Camera: Perimeter protection; SMD Plus; people counting; heat map target classification (human, vehicle)<br/>HDMI(4K)/VGA simultaneous video output<br/>1 SATA III port, up to 10 TB, 1 front USB 2.0 port, 1 rear USB 3.0 port<br/>Audio I/O 1/1 for Two Way Talk Only<br/>100 Mbps Network Card, P2P support</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |                                                                                       | 110,200,000 |
| 149      | NVR4116HS-4KS2/L | <p>16 channel IP camera input, 16 channel Live Preview<br/>Smart H.265/H.264 codec decoding<br/>Max 80Mbps incoming bandwidth<br/>Up to 8MP Resolution for Preview and Playback<br/>16-ch@720P decoding capacity<br/>Support SMD Plus by Camera<br/>HDMI(4K)/VGA simultaneous video output<br/>Support 1 SATA HDD up to 8TB, 2 USB2.0<br/>100 Mbps Network Card, P2P support</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |                                                                                       | 110,200,000 |
| 150      | NVR4116HS-4KS3   | <p>16CH Compact 1U 1HDD Lite Network Video Recorder<br/>Supports Smart H.265+, H.265, Smart H.264+, H.264 and MJPEG decoding formats<br/>Max. decoding capability: 8 × 1080p@30 fps or 2 × 8 MP@30 fps<br/>Max. 160/160/80 Mbps incoming/recording/outgoing bandwidth<br/>Supports IP cameras with a resolution up to 12 MP<br/>AI by Recorder supports 4-channel SMD Plus<br/>AI by Camera supports face detection and recognition, perimeter protection, SMD Plus, people counting, stereo analysis and heat map<br/>Supports EPTZ, and one-click arming and disarming<br/>1 SATA port up to 20 TB, 1 HDMI, 1 VGA Simultaneous/Heterogeneous, Audio I/O 1/1, Alarm I/O 2/1, 1000Mb LAN, ONVIF 22.12(Profile T; Profile S; Profile G)</p>                                                                                                                                                                                                                                                                                                                                                                                              |                                                                                       | 110,200,000 |
| 151      | NVR4216-4KS2/L   | <p>16 channel IP camera input, 16 channel Live Preview<br/>Smart H.265+/H.264+ codec decoding<br/>Max160Mbps incoming bandwidth<br/>Max. decoding capability: 8 × 1080p@30 fps. Supports adaptive decoding<br/>8-ch@1080P decoding capability<br/>HDMI(4K)/VGA simultaneous video output<br/>AI by Camera: Face detection with Face Attributes, perimeter protection, IVS, people counting, heat map, and SMD<br/>Support 2 SATA HDD up to 10TB, 2 USB Ports (1 USB2.0, 1 USB3.0)<br/>4 Alarm Input, 2 Relay Output, 1*1000Mbps Network Card, P2P support, ONVIF(profile T/S/G)</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |    | 148,700,000 |

| ردیف | مدل                | مشخصات فنی                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | تصویر                                                                                 | قیمت (ریال) |
|------|--------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|-------------|
| 152  | NVR4216-16P-4KS2/L | <div> <div>4K</div> <div>UPGRADED</div> </div> <p>16 channel IP camera input, 16 channel Live Preview<br/>Smart H.265+/H.264+ codec decoding<br/>Max160Mbps incoming bandwidth<br/>Max. decoding capability: 8 × 1080p@30 fps. Supports adaptive decoding<br/>8-ch@1080P decoding capability<br/>HDMI(4K)/VGA simultaneous video output<br/>AI by Camera: Face detection with Face Attributes, perimeter protection, IVS, people counting, heat map, and SMD<br/>Support 2 SATA HDD up to 10TB, 2 USB Ports (1 × front USB2.0, 1 × back USB2.0)<br/>4 Alarm Input, 2 Relay Output, 1*1000Mbps Network Card, 16 Port PoE, ONVIF(profile T/S/G)</p>                                                                                                                                                                                                                                                                                  |    | 240,500,000 |
| 153  | NVR4216-4KS3       | <div> <div>4K</div> <div>AI</div> </div> <p>16CH 1U 2HDDs Lite Network Video Recorder<br/>Supports Smart H.265+, H.265, Smart H.264+, H.264 and MJPEG decoding formats<br/>Max. 160/160Mbps incoming/recording bandwidth<br/>Max. decoding capability: 8 × 1080p@30 fps or 2 × 8 MP@30 fps<br/>HDMI(4K)/VGA simultaneous video output<br/>AI by Recorder supports 4-channel SMD Plus<br/>AI by Camera supports face detection(6CHs) and recognition(6CHs), perimeter protection(6CHs), SMD Plus(6CHs), people counting, stereo analysis and heat map<br/>Supports IP cameras with a resolution up to 12MP<br/>2 SATA ports. Each disk up to 20TB, Audio in/out 1/1 for Two Way Talk, Alarm in/out 4/2, USB 2 Ports, LAN 1*1000, P2P support, ONVIF(profile T/S/G)</p>                                                                                                                                                              |    | 148,700,000 |
| 154  | NVR4232-EI         | <div> <div>4K</div> <div>AI</div> <div>Wiz Sense</div> </div> <p>32CH 1U 2HDDs WizSense Network Video Recorder<br/>Smart H.265+/H.265/Smart H.264+/H.264/MJPEG decoding format<br/>Access, storage or forwarding at 256 Mbps (180 Mbps when AI function enabled)<br/>Max. decoding capability: 16 × 1080p@30 fps. Supports adaptive decoding<br/>HDMI(4K)/VGA simultaneous &amp; Independent video output<br/>AI by NVR: 1-channel face detection and recognition; 2-channel perimeter protection; up to 10 face databases and 20,000 face images; 4-channel SMD Plus<br/>AI by Camera: Face detection(8CHs) and recognition(8CHs), perimeter protection(8CHs); SMD Plus(8CHs); people counting; stereo analysis; heat map<br/>Supports IP cameras with a resolution up to 16MP<br/>2 SATA ports, up to 16TB,, Audio in/out 1/1 for Two Way Talk, Alarm in/out 4/2, USB 2 Ports, LAN 1*1000, P2P support, ONVIF(profile T/S/G)</p> |    | 212,400,000 |
| 155  | NVR4232-4KS2/L     | <div> <div>4K</div> <div>AI</div> </div> <p>32 Channel 1U 2HDDs Network Video Recorder<br/>Smart H.265+/H.264+ codec decoding<br/>Max160Mbps incoming bandwidth<br/>Max. decoding capability: 8 × 1080p@30 fps<br/>HDMI(4K)/VGA simultaneous video output<br/>AI by Camera: Face detection with attributes, perimeter protection, IVS, people counting, heat map, and SMD, Human &amp; Vehivle Classification<br/>2 SATA III ports, up to 10 TB each port, 1 × front USB2.0; 1 × back USB2.0<br/>4 Alarm Input, 2 Relay Output, 1*1000Mbps Network Card, P2P support, ONVIF(profile T/S/G)</p>                                                                                                                                                                                                                                                                                                                                     |  | 175,450,000 |
| 156  | NVR4232-4KS2       | <div> <div>4K</div> </div> <p>32 channel IP camera input, 16 channel Live Preview<br/>H.265/H.264 codec decoding<br/>Max 200Mbps incoming bandwidth<br/>Up to 8MP Resolution for Preview and Playback<br/>HDMI/VGA simultaneous video output<br/>Support 2 SATA HDD up to 6TB<br/>2 USB Ports (1 USB2.0, 1 USB3.0)<br/>4 Alarm Input, 2 Relay Output<br/>1*1000Mbps Network Card, P2P support</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |  | 172,500,000 |
| 157  | NVR4432-4KS2/I     | <div> <div>4K</div> <div>AI</div> <div>Wiz Sense</div> </div> <p>32 Channel 1.5U 4HDDs WizSense Network Video Recorder<br/>Smart H.265+/H.265/Smart H.264+/H.264/MJPEG<br/>Access, storage or forwarding at 256 Mbps, Max. decoding capability: 10 × 1080p@30 fps<br/>Face detection; face recognition; perimeter protection,SMD Plus<br/>Multi-channel Playback Up to 16 channel<br/>The maximum HDD capacity 4 SATA ports, up to 10 TB<br/>Alarm Input 16,Alarm Output 4<br/>2 RJ-45 10/100/1000 Mbps self-adaptive Ethernet port</p>                                                                                                                                                                                                                                                                                                                                                                                            |  | 317,400,000 |
| 158  | NVR4232-4KS3       | <div> <div>4K</div> <div>AI</div> </div> <p>32CH 1U 2HDDs Lite Network Video Recorder<br/>Supports Smart H.265+, H.265, Smart H.264+, H.264 and MJPEG decoding formats<br/>Max. 160Mbps incoming bandwidth<br/>Max. decoding capability: 8 × 1080p@30 fps or 2 × 8 MP@30 fps<br/>HDMI(4K)/VGA simultaneous video output<br/>AI by Recorder supports 4-channel SMD Plus<br/>AI by Camera supports face detection(6CHs) and recognition(6CHs), perimeter protection(6CHs), SMD Plus(6CHs), people counting, stereo analysis and heat map<br/>Supports IP cameras with a resolution up to 12 MP<br/>2 SATA ports. Each disk up to 20TB, Audio in/out 1/1 for Two Way Talk, Alarm in/out 4/2, USB 2 Ports, LAN 1*1000, P2P support, ONVIF(profile T/S/G)</p>                                                                                                                                                                           |  | 178,650,000 |

| ردیف | مدل                    | مشخصات فنی                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | تصویر                                                                                 | قیمت (ریال) |
|------|------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|-------------|
| 159  | NVR4432-EI             | <p>32CH 1.5U 4HDDs WizSense Network Video Recorder<br/>Smart H.265+/H.265/Smart H.264+/H.264/MJPEG decoding format<br/>Access, storage or forwarding at 256 Mbps (180 Mbps when AI function enabled)<br/>Max. decoding capability: 16 × 1080p@30 fps. Supports adaptive decoding<br/>1 HDMI, 1 VGA, 4K, Simultaneous/heterogeneous<br/>AI by NVR: 1-channel face detection and recognition; 2-channel perimeter protection; up to 10 face databases and 20,000 face images; 4-channel SMD Plus<br/>AI by Camera: Face detection and recognition, perimeter protection; SMD Plus; ANPR; people counting; stereo analysis; heat map<br/>Supports IP cameras with a resolution up to 16MP<br/>4 SATA ports, up to 16 TB each, Audio I/O 1/1, Alarm I/O 16/4, 3 USB Ports, 2 1000Mb LAN<br/>ONVIF 22.06(Profile T; Profile S; Profile G)</p>           |    | 357,450,000 |
| 160  | DHI-NVR5232-4KS2(V2.0) | <p>32Channel 1U 4K &amp; H.265 Pro Network Video Recorder (V2.00)<br/>Smart H.265+/H.265/H.264+/H.264/MJPEG decoding<br/>Max 320Mbps incoming bandwidth, Up to 12Mp resolution preview &amp; playback<br/>Max 4-ch@8MP(30fps), 16-ch@1080P(30fps) decoding<br/>1*HDMI(4K)/1*VGA simultaneous video output<br/>2*SATA HDDs(10 TB for each HDD), 2 USB(1 USB3.0,1 USB2.0)<br/>1*1000 Mbps Network Card, RS232, RS485,4/2 Alarm In/out , P2P Support</p>                                                                                                                                                                                                                                                                                                                                                                                              |    | 310,950,000 |
| 161  | NVR5232-EI             | <p>32 Channels 1U 2HDDs WizSense Network Video Recorder<br/>Smart H.265+/H.265/Smart H.264+/H.264/MJPEG decoding format<br/>Max. decoding capability: 32 × 1080p@30 fps or 32 × 2MP@30 fps<br/>Max. 384 Mbps incoming/recording/outgoing bandwidth<br/>16ch AcuPick, N+M Clustering, Face Detection, Face Recognition, Face Attributes, Face Expression, SMD Plus, Perimeter Protection, Metadata, ANPR, Stereo Analysis, Heatmap, People Counting<br/>AI by recorder: 2-channel face detection and recognition, 4-channel perimeter protection, and 8-channel SMD Plus.<br/>AI by camera: Face detection and recognition, perimeter protection, SMD Plus, metadata, ANPR, stereo analysis, heat map, and people counting<br/>Audio in/out 1/1, Alarm in/out 4/2, 2 SATA each up to 16TB, RS232, RS485, 2 USB 2, 1 USB 3, 1 HDMI, 1 VGA, 1 LAN</p> |    | 346,050,000 |
| 162  | NVR5432-EI             | <p>32 Channels 1.5U 4HDD WizSense Network Video Recorder<br/>Industrial-grade processor - Embedded Linux OS<br/>Smart H.265+/H.265/Smart H.264+/H.264/MJPEG decoding format<br/>Max. 384 Mbps incoming/recording/outgoing bandwidth<br/>AI by recorder: 2ch face detection and recognition, 4ch perimeter protection, and 8ch SMD Plus<br/>AI by camera: Face detection and recognition, perimeter protection, SMD Plus, metadata, ANPR, stereo analysis, heat map, and people counting<br/>Network Port 2 (10/100/1000 Mbps Ethernet port, RJ-45)<br/>4 SATA ports, up to 16 TB - Security baseline 2.3 - Supports 4K display - Alarm In/Out : 16ch/6ch</p>                                                                                                                                                                                       |   | 478,200,000 |
| 163  | NVR5432-4KS2(V2.0)     | <p>32Channel 1.5U 4K &amp; H.265 Pro Network Video Recorder (V2.00)<br/>Smart H.265+/H.265/Smart H.264+/H.264/MJPEG decoding<br/>Max 320Mbps incoming bandwidth<br/>Up to 12Mp resolution preview &amp; playback<br/>Max 4-ch@8MP(30fps), 16-ch@1080P(30fps) decoding<br/>2*HDMI/2*VGA simultaneous video output<br/>4*SATA HDDs(10 TB for each HDD), 3 USB(2 USB3.0,1 USB2.0)<br/>Support 1 e-SATA, 2*1000 Mbps Network Card<br/>RS232, RS485,16/6 Alarm In/out , P2P Support</p>                                                                                                                                                                                                                                                                                                                                                                 |  | 406,600,000 |
| 164  | NVR5832-EI             | <p>32 Channels 2U 8HDD WizSense Network Video Recorder<br/>Smart H.265+/H.265/Smart H.264+/H.264/MJPEG decoding format<br/>Max. 384 Mbps incoming/recording/outgoing bandwidth<br/>Max. decoding capability: 32 × 1080p@30 fps or 32 × 2MP@30 fps<br/>Support AcuPick with Max. 16-Channel, Support N+M cluster<br/>AI by recorder: 2-channel face detection and recognition, 4-channel perimeter protection, and 8-channel SMD Plus.<br/>AI by camera: Face detection(16CHs) and recognition(16CHs), perimeter protection(16CHs), SMD Plus(16CHs), metadata(8CHs), ANPR(8CHs), stereo analysis, heat map, and people counting<br/>Audio in/out 1/2 for Two way talk only, Alarm in/out 16/8, USB*3, HDMI*2, VGA*2, LAN*2*1000, eSATA*1, 8 SATA Ports each up to 20TB, RS-232, RS-485, P2P Support, Onvif (S/T/G)</p>                              |  | 733,200,000 |
| 165  | NVR5832-4KS2           | <p>32 channel IPC input, 32 Channel Live Preview<br/>H.265/H.264/MJPEG/MPEG4 codec decoding<br/>Max 320Mbps incoming bandwidth, Up to 12Mp resolution preview&amp;playback<br/>Max 16ch@1080P   4ch@4K H.265   H.264 Playback<br/>2HDMI/VGA simultaneous video output<br/>Support 8 SATA HDDs up to 48TB, 4 USB(2 USB3.0, 2 USB2.0)<br/>2*1000 Mbps Network Card, RS232, 16 Alarm In , 6 Relay Output, P2P Support, Raid 0/1/5/6/10</p>                                                                                                                                                                                                                                                                                                                                                                                                            |  | 526,100,000 |
| 166  | DHI-NVR5464-4KS2(V2.0) | <p>64Channel 1.5U 4K&amp;H.265 Pro Network Video Recorder (V2.00)<br/>Smart H.265+/H.265/Smart H.264+/H.264/MJPEG decoding<br/>Max 320Mbps incoming bandwidth, Up to 12Mp resolution preview &amp; playback<br/>Max 4-ch@8MP(30fps), 16-ch@1080P(30fps) decoding<br/>2*HDMI/2*VGA simultaneous video output<br/>4*SATA HDDs(10 TB for each HDD), 3 USB(2 USB3.0,1 USB2.0)<br/>Support 1 e-SATA, 2*1000 Mbps Network Card, RS232, RS485,16/6 Alarm In/out , P2P Support</p>                                                                                                                                                                                                                                                                                                                                                                         |  | 478,200,000 |

| مدل ردیف                   | مشخصات فنی                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | تصویر                                                                                 | قیمت (ریال)   |
|----------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------|
| 167 NVR5464-EI             | <p>Smart H.265+/H.265/Smart H.264+/H.264/MJPEG decoding format<br/>Industrial-grade processor - Embedded Linux<br/>Max. decoding capability: 32 × 1080p@30 fps or 32 × 2MP@30 fps<br/>Support AcuPick with Max. 16-Channel - Support N+M cluster - Support Raid0/1/5/6/10<br/>Max. 384 Mbps incoming/recording/outgoing bandwidth<br/>AI by recorder: 2-ch face detection and recognition, 4-ch perimeter protection, and 8-ch SMD Plus<br/>AI by camera: Face detection and recognition, perimeter protection, SMD Plus, metadata, ANPR, stereo analysis, heat map, and people counting<br/>Security baseline 2.3 - Alarm In/Out : 16/6 - 4 SATA ports, each disk up to 20 TB<br/>HDMI:2 - VGA:2 - USB:4 - RS485:2 - RS232:1</p>                                                                                                                                                                                                                                                                                                       |    | 604,450,000   |
| 168 NVR5864-EI             | <p>64 Channels 2U 8HDDs WizSense Network Video Recorder<br/>Smart H.265+/H.265/Smart H.264+/H.264/MJPEG decoding format<br/>Industrial-grade processor - Embedded Linux<br/>Max. decoding capability: 32 × 1080p@30 fps or 32 × 2MP@30 fps<br/>Support AcuPick with Max. 16-Channel - Support N+M cluster - Support Raid0/1/5/6/10<br/>Max. 384 Mbps incoming/recording/outgoing bandwidth<br/>AI by recorder: 2-ch face detection and recognition, 4-ch perimeter protection, and 8-ch SMD Plus<br/>AI by camera: Face detection and recognition, perimeter protection, SMD Plus, metadata, ANPR, stereo analysis, heat map, and people counting<br/>Security baseline 2.3 - Alarm In/Out : 16/8 - 8 SATA ports, each disk up to 20 TB<br/>HDMI:2 - VGA:2 - USB:4 - RS485:2 - RS232:1</p>                                                                                                                                                                                                                                              |    | 843,400,000   |
| 169 NVR5864H-XI            | <p>64CH 2U 8HDDs WizMind Network Video Recorder<br/>Smart H.265+, H.265, Smart H.264+, H.264 and MJPEG<br/>Max. decoding capability: 32 × 1080p@30 fps<br/>Max. 512/512/512 Mbps incoming/recording/outgoing bandwidth<br/>Supports IPC up to 32 MP, AcuPick with up to 36 channels, EPTZ, and one-click arming and disarming<br/>AI by Recorder supports 8-channel face detection and recognition, up to 20 face databases and 200,000 face images; 8-channel metadata; 24-channel perimeter protection; 32-channel SMD Plus<br/>AI by Camera supports face detection and recognition, perimeter protection, SMD Plus, metadata, ANPR, stereo analysis, heat map, and people counting<br/>RAID 0/1/5/6/10, N+M cluster, and iSCSI, HDD hot swapping<br/>2 VGA, 2 HDMI, Audio I/O 1/1, Alarm I/O 16/8, 1 E-SATA, 8 SATA each up to 20TB total 160TB, 2x LAN 1000, USB:4 - RS485:2 - RS232:1</p>                                                                                                                                         |    | 1,182,000,000 |
| 170 DHI-NVR5864-4KS2(V2.0) | <p>64 Channel 2U 4K &amp; H.265 Pro Network Video Recorder (V2.00)<br/>Smart H.265+/H.265/H.264+/H.264/MJPEG decoding<br/>Max 320Mbps incoming bandwidth, Up to 12Mp resolution preview &amp; playback<br/>Max 4-ch@8MP(30fps), 16-ch@1080P(30fps) decoding<br/>2*HDMI/2*VGA simultaneous video output<br/>8*SATA HDDs(10 TB for each HDD), 4 USB(2 USB3.0,2 USB2.0)<br/>1*e-SATA, 2*1000 Mbps Network Card, RS232, RS485,16/6 Alarm In/out , P2P Support</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |   | 701,350,000   |
| 171 NVR608-32-4KS2         | <p>Intel Dual-core Processor, 32 channel IPC input, 32 Channel Live Preview<br/>(1st Screen:1/4/8/9/16/25/36,2nd Screen: 1/4/8/9/16)<br/>H.265/H.264/MJPEG codec decoding, Max 384Mbps incoming bandwidth<br/>Up to 12Mp resolution preview&amp;playback<br/>2HDMI/VGA simultaneous video output<br/>Support 8 SATA HDDs up to 48TB,1 eSATA Port<br/>Support Raid 0/1/5/6/10, 4 USB(2 USB3.0, 2 USB2.0)<br/>2*1000 Mbps Network Card, RS232 , RS485, 16 Alarm In , 8 Relay Output</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |  | 597,850,000   |
| 172 NVR608-64-4KS2         | <p>Intel Quad-core Processor<br/>64 channel IPC input, 32 Channel Live Preview<br/>(1st Screen:1st Screen: 1/4/8/9/16/25/36 ,2nd Screen: 1/4/8/9/16), H.265/H.264/MJPEG codec decoding<br/>Max 384Mbps incoming bandwidth<br/>Up to 12Mp resolution preview &amp; playback<br/>2HDMI/VGA simultaneous video output<br/>8 SATA III ports, up to 10 TB for a single HDD,1 eSATA Port<br/>Support Raid 0/1/5/6/10<br/>Support Smart Tracking and Intelligent Video<br/>4 USB(2 USB3.0, 2 USB2.0), 2*1000 Mbps Network Card<br/>RS232 , RS485, 16 Alarm In , 8 Relay Output</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                             |  | 1,036,100,000 |
| 173 DHI-NVR608H-32-XI      | <p>32 Channels 2U 8HDDs WizMind Network Video Recorder<br/>Industrial-grade processor<br/>AI disabled: 1024 Mbps incoming, 1024 Mbps recording and 800 Mbps outgoing<br/>AI enabled: 512 Mbps incoming, 512 Mbps recording and 400 Mbps outgoing<br/>Resolution 32 MP; 24 MP; 16 MP; 12 MP; 8 MP; 5 MP; 4 MP; 1080p; 720p; D1<br/>Supports N+M cluster<br/>Support Raid0/1/5/6/10 &amp; HDD hot swapping<br/>AI by recorder: 4ch face detection and recognition; 8ch metadata; 24ch perimeter protection; 32ch SMD Plus.<br/>AI by camera: Face detection and recognition, perimeter protection, SMD Plus, metadata, ANPR, and people counting<br/>2-channel VGA, 4-channel HDMI video output with Simultaneous &amp; Independent Video Mode<br/>HDMI1 and HDMI2 is 4K, max. resolution of HDMI3 is 8K, max. resolution of HDMI4 is 1080p<br/>Support Smart H.265+; H.265; Smart H.264+; H.264; MPEG4; MJPEG<br/>Audio I/O 1/2, Alarm I/O 16/8, HDD 8 SATA Ports 16TB Each, 1 e-SATA Port, 4 USB Ports, 2 Network Ports 10/100/1000</p> |  | 1,068,000,000 |

| رقم | نموذج                 | مواصفات فنية                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | تصوير                                                                                                                                                                                                                                                   | سعر (ريال)    |
|-----|-----------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|
| 174 | DHI-NVR608H-64-XI     | <p>64 Channels 2U 8HDDs WizMind Network Video Recorder</p> <p>Industrial-grade processor</p> <p>AI disabled: 1024 Mbps incoming, 1024 Mbps recording and 800 Mbps outgoing</p> <p>AI enabled: 512 Mbps incoming, 512 Mbps recording and 400 Mbps outgoing</p> <p>Resolution 32 MP; 24 MP; 16 MP; 12 MP; 8 MP; 5 MP; 4 MP; 1080p; 720p; D1</p> <p>Supports N+M cluster</p> <p>Support Raid0/1/5/6/10 &amp; HDD hot swapping</p> <p>AI by recorder: 4ch face detection and recognition; 8ch metadata; 24ch perimeter protection; 32ch SMD Plus.</p> <p>AI by camera: Face detection and recognition, perimeter protection, SMD Plus, and people counting 64ch - metadata, ANPR 32ch</p> <p>2-channel VGA, 4-channel HDMI video output with Simultaneous &amp; Independent Video Mode</p> <p>HDMI1 and HDMI2 is 4K, max. resolution of HDMI3 is 8K, max. resolution of HDMI4 is 1080p</p> <p>Support Smart H.265+; H.265; Smart H.264+; H.264; MPEG4; MJPEG</p> <p>Audio I/O 1/2, Alarm I/O 16/8, HDD 8 SATA Ports 16TB Each, 1 e-SATA Port, 4 USB Ports, 2 Network Ports 10/100/1000</p>  |    | 1,514,300,000 |
| 175 | NVR608H-128-XI        | <p>128 Channels 2U 8HDDs WizMind Network Video Recorder</p> <p>Industrial-grade processor</p> <p>AI disabled: 1024 Mbps incoming, 1024 Mbps recording and 800 Mbps outgoing</p> <p>AI enabled: 512 Mbps incoming, 512 Mbps recording and 400 Mbps outgoing</p> <p>Resolution 32 MP; 24 MP; 16 MP; 12 MP; 8 MP; 5 MP; 4 MP; 1080p; 720p; D1</p> <p>Supports N+M cluster</p> <p>Support Raid0/1/5/6/10 &amp; HDD hot swapping</p> <p>AI by recorder: 4ch face detection and recognition; 8ch metadata; 24ch perimeter protection; 32ch SMD Plus.</p> <p>AI by camera: Face detection and recognition, perimeter protection, SMD Plus, and people counting 64ch - metadata, ANPR 32ch</p> <p>2-channel VGA, 4-channel HDMI video output with Simultaneous &amp; Independent Video Mode</p> <p>HDMI1 and HDMI2 is 4K, max. resolution of HDMI3 is 8K, max. resolution of HDMI4 is 1080p</p> <p>Support Smart H.265+; H.265; Smart H.264+; H.264; MPEG4; MJPEG</p> <p>Audio I/O 1/2, Alarm I/O 16/8, HDD 8 SATA Ports 16TB Each, 1 e-SATA Port, 4 USB Ports, 2 Network Ports 10/100/1000</p> |    | 2,120,000,000 |
| 176 | DHI-NVR608-128-4KS2   | <p>128 Channel 2U Ultra 4K H.265 Network Video Recorder</p> <p>(1st Screen: 1/4/8/9/16/25/36 ,2nd Screen: 1/4/8/9/16)</p> <p>H.265/H.264/MJPEG codec decoding</p> <p>Max 384Mbps incoming bandwidth</p> <p>Up to 12Mp resolution preview &amp; playback</p> <p>2HDMI(different Source)/VGA simultaneous video output</p> <p>Support 8 SATA (8TB for each HDD),1 eSATA Port</p> <p>Support Raid 0/1/5/10</p> <p>Support Smart Tracking and Intelligent Video</p> <p>4 USB(2 USB3.0, 2 USB2.0), 2*1000 Mbps Network Card</p> <p>RS232 , RS485, 16/8 Alarm In/Output</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |                                                                                    | 1,211,400,000 |
| 177 | ESS1508C              | <p>2U standard 19-inch rack case</p> <p>Connect master device via eSATA or USB</p> <p>1 eSATA port transmission speed up to 3Gbps</p> <p>1 USB 3.0 port data transmission higher than normal</p> <p>Powerful R / W performance: read &gt;64MB/s, write &gt;64MB/s</p> <p>ESS1508C: Max support Internal 8 SATA HDD up to 48TB</p> <p>Recommended with DVR, NVR connection</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |                                                                                                                                                                    | 184,950,000   |
| 178 | PFS3006-4ET-36        | <p>6-Port Fast Ethernet Switch with 4-Port PoE</p> <p>4 PoE ports with 10/100 Mbps Base-TX</p> <p>2 uplink ports with 10/100Mbps Base-TX</p> <p>Port1-4 ≤30W, whole PoE budget ≤36W</p> <p>Support 802.3af and 802.3at standards</p> <p>Operating Temperature: -10°C to +55°C</p> <p>Support 250 m long distance PoE transmission</p> <p>Support PoE watchdog</p> <p>Switching Capacity 1.2 Gbps, Packet Forwarding Rate 0.89 Mpps, MAC Table Size 2K, Jumbo Frame 2048 byte</p> <p>Standards IEEE 802.3, IEEE 802.3u, IEEE 802.3X</p> <p>ESD Air discharge: 8kV Contact discharge: 6kV, Thunderproof Common mode: 6kV Differential mode: 4kV</p>                                                                                                                                                                                                                                                                                                                                                                                                                                       |                                                                                                                                                                    | 36,100,000    |
| 179 | PFS3106-4ET-60 (V2.0) | <p>4-Port PoE Switch (Unmanaged)</p> <p>4 × RJ-45 10/100 Mbps (PoE)</p> <p>1 × RJ-45 10/100/1000 Mbps (Uplink)</p> <p>1 × SFP 100/1000 Mbps (Uplink)</p> <p>Intelligent PoE, Hi-PoE 60W (Orange Port), PoE watchdog, 250 m long distance PoE transmission</p> <p>Wide operating temperature: -30°C to +65°C (-22°F to +149°F)</p> <p>Switching Capacity 6.80 Gbps, Packet Forwarding Rate 3.57 Mpps, Packet Buffer Memory 1 Mbit, MAC Table Size 8K</p> <p>Communication Standard IEEE802.3; IEEE802.3u; IEEE802.3X; IEEE 802.3ab; IEEE 802.3z</p> <p>PoE Standard IEEE802.3af; IEEE802.3at; Hi-PoE, 250 m long distance PoE transmission</p> <p>Statics Protection Air discharge:15kV Contact discharge:8kV, Thunder-proof Common mode:4kV Differential mode:2kV</p>                                                                                                                                                                                                                                                                                                                   |                                                                                 | 65,500,000    |
| 180 | PFS3010-8ET-65        | <p>10-Port Fast Ethernet Switch with 8-Port PoE</p> <p>Port 1-8: 8 × RJ-45 10/100 Mbps (PoE)</p> <p>Port 9-10: uplink with 10/100 Mbps</p> <p>Support 802.3af and 802.3at standards</p> <p>Support 250 m long distance PoE transmission</p> <p>Support PoE watchdog</p> <p>Port1-8 ≤30W, whole PoE budget ≤65W</p> <p>Switching Capacity 2.0 Gbps, Packet Forwarding Rate 1.49 Mpps, MAC Table Size 2K, Jumbo Frame 2048 byte</p> <p>ESD Air discharge: 8kV Contact discharge: 6kV, Thunderproof Common mode: 6kV Differential mode: 4kV</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |                                                                                                                                                                    | 51,400,000    |

| مدل ردیف                  | مشخصات فنی                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | تصویر                                                                                 | قیمت (ریال) |
|---------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|-------------|
| 181 PFS3110-8ET-96 (V2.0) | <p>10-Port Unmanaged Desktop Switch with 8 Port PoE</p> <p>Port 1~8: 8 × RJ-45 10/100 Mbps (PoE)</p> <p>Port 9: 1 × RJ-45 10/100/1000 Mbps (uplink)</p> <p>Port 10: 1 × SFP 1000 Mbps (uplink)</p> <p>Communication Standard IEEE802.3u/IEEE802.3z/IEEE 802.3ab/IEEE 802.3z</p> <p>PoE Standard IEEE802.3af/ IEEE802.3at/ Hi-PoE/ IEEE802.3bt</p> <p>Port 1-2 ≤ 90 W, Port 3-8 ≤ 30W, totals 96 W</p> <p>Intelligent PoE, BT 90W, Long distance PoE, PoE watchdog, Wide working temperature</p> <p>Lightning Protection Air discharge:8kV Contact discharge:6kV, ESD Protection Common mode:4kV Differential mode:2kV</p>                                                                                                                             |    | 95,000,000  |
| 182 PFS3218-16ET-135      | <p>Layer 2 PoE switch</p> <p>2*10/100/1000 Base-T (Combo port)</p> <p>2*1000 Base-X (Combo port)</p> <p>16 × RJ45 10/100 Mbps</p> <p>Port 1~2≤60W, Port 3~16≤30W, totals135W</p> <p>IEEE802.3, IEEE802.3u, IEEE802.3x, IEEE802.3ab, IEEE802.3z</p> <p>PoE Standard IEEE802.3af, IEEE802.3at, Hi-PoE</p> <p>Intelligent PoE, PD Alive(PoE Watchdog), Long Distance PoE Transmission, Smooth Transmission</p> <p>Wide Working Temperature: -10 to 55°C (14°F to 131°F), VLAN Port Isolation</p> <p>Switching Capacity 7.2 Gbps, Packet Forwarding Rate 5.3568 Mpps, Packet Buffer Memory 4 Mbit, MAC Table Size 8K</p> <p>ESD Air discharge: 8kV Contact discharge: 6kV, Thunderproof Common mode: 4kV Differential mode: 2kV</p>                       |    | 162,750,000 |
| 183 PFS3226-24ET-240      | <p>Layer 2 PoE switch</p> <p>2*10/100/1000 Base-T (Combo port)</p> <p>2*1000 Base-X (Combo port)</p> <p>24 × RJ45 10/100Mbps</p> <p>Intelligent PoE, PD Alive(PoE Watchdog), Long Distance PoE Transmission, Smooth Transmission</p> <p>Wide Working Temperature: -10 to 55°C (14°F to 131°F), VLAN Port Isolation</p> <p>Port1/2 support Hi-PoE (60W), PoE+, PoE</p> <p>Port 1-2≤60W, Port 3-24≤30W, totals240W</p> <p>IEEE802.3, IEEE802.3u, IEEE802.3x, IEEE802.3ab, IEEE802.3z</p> <p>PoE Standard IEEE802.3af, IEEE802.3at, Hi-PoE</p> <p>Switching Capacity 8.8Gbps, Packet Forwarding Rate 6.5472 Mpps</p> <p>MAC Table Size 8K</p> <p>ESD Air discharge: 8kV Contact discharge: 6kV, Thunderproof Common mode: 4kV Differential mode: 2kV</p> |    | 208,800,000 |
| 184 PFT1300               | <p>PoE Extender</p> <p>1*10/100 Base-T PoE power receiving port</p> <p>1*10/100 Base-T PoE power supply port, supply power for the next extender</p> <p>1*10/100 Base-T PoE power supply port, supply power for IPC</p> <p>Support passive PoE cascade power supply and Ethernet data exchange</p> <p>Support IEEE 802.3af/at standard power supply IP Camera</p> <p>able to cascade level 2 PoE Extender, connect to 3 IPC (power consumption &lt;=8W), max transmission distance 300m</p>                                                                                                                                                                                                                                                           |   | 10,750,000  |
| 185 PFM700                | <p>*1 Channel HDMI Transmission Signal</p> <p>*1080P/1080i/720P/576P/576i/480P/480i Resolution Output Signal , *60M (max)Transmission Distance</p> <p>*Input voltage DC5V</p> <p>*Use single UTP (CAT-5E and CAT-6) real-time transmit 1-ch HD video, signal:support HDMI 1.3</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |  | 30,550,000  |
| 186 NKB1000               | <p>Keyboard to Control : Dahua High Speed Dome (all models)</p> <p>Dahua Standalone DVR , Dahua Network High Speed Dome</p> <p>Network Video Server, Connection : RS485, RS422, USB, RS232 &amp; Network</p> <p>Three Dimensional Joystick Control of PTZ Functions</p> <p>Preset Position, Auto Scan, Auto Pan, Auto Tour &amp; Pattern Control, On-Screen Menu &amp; User Operation Procedure Tips</p> <p>Connect to SmartPSS via USB</p>                                                                                                                                                                                                                                                                                                           |  | 195,000,000 |



تارتن دژ آریانا  
02152605

# Tiandy

تارتن دژ آریانا

## AK SERIES

|   |                                             |                                                                                   |                                                                                                                                                                                                                                      |                |
|---|---------------------------------------------|-----------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------|
| 1 | <a href="#">TC-C320N Spec: I3/E/Y/2.8MM</a> |  | Metal+Plastic Housing - Up to 1920x1080@30fps<br>·S+265/H.265/H.264 - Min. illumination Color: 0.04Lux@F2.2<br>·Smart IR, IR Range: 30m, ·Built-in Mic<br>·Operating Conditions -30°~60°, 0~95% RH -POE<br>·Support motion detection | IRR 23,000,000 |
| 2 | <a href="#">TC-C321N Spec: I3/E/Y/2.8MM</a> |  | Plastic Housing - Up to 1920x1080@30fps<br>·S+265/H.265/H.264 - Min. illumination Color: 0.04Lux@F2.2<br>·Smart IR, IR Range: 30m, Built-in Mic<br>·Operating Conditions -30°~60°, 0~95% RH - POE, IP67<br>·Support motion detection | IRR 23,000,000 |

## Network Camera - NVR

### Spark - Series

|    |                                                   |                                                                                     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |                |
|----|---------------------------------------------------|-------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------|
| 3  | <a href="#">TC-C32QN Spec: I3/E/Y/2.8mm/V5.0</a>  |    | 2MP Fixed IR Bullet Camera - Metal+Plastic Housing - Up to 1920x1080@30fps ·S+265/H.265/H.264<br>·Min. illumination Color: 0.02Lux@F2.0 ·Smart IR, IR Range: 30m<br>·Built-in Mic · Operating Conditions -30°C~60°C, 0~95% RH - POE, IP67                                                                                                                                                                                                                                                                                                                                                                             | IRR 26,000,000 |
| 4  | <a href="#">TC-C32XN Spec: I3/E/Y/2.8mm/V5.0</a>  |    | 2MP Fixed Turret Camera- Metal+Plastic ·Up to 1920x1080@30fps ·S+265/H.265/H.264 ·Min. illumination Color: 0.02Lux@F2.0 ·Smart IR, IR Range: 30m ·Support tripwire and perimeter ·Built-in Mic, SD Card Slot, Reset Button ·Operating Conditions -40°C~65°C, 0~95% RH - POE, IP67                                                                                                                                                                                                                                                                                                                                     | IRR 26,000,000 |
| 5  | <a href="#">TC-C34QN Spec: I3/E/Y/2.8MM/V5.0</a>  |    | ·Metal+Plastic Housing -Up to 2560x1440@20fps<br>·S+265/H.265/H.264 -Min. illumination Color: 0.02Lux@F1.6<br>·Smart IR, IR Range: 30m -Built-in Mic<br>·Operating Conditions -30°~60°, 0~95% RH<br>·POE, IP67                                                                                                                                                                                                                                                                                                                                                                                                        | IRR 54,000,000 |
| 6  | <a href="#">TC-C34QN Spec: I5W/E/Y/2.8MM/V4.2</a> |   | 4MP Fixed Starlight IR Bullet Camera, ·Metal+Plastic Housing<br>·Up to 2688X1520@25fps ·S+265/H.265/H.264<br>·Min. illumination Color: 0.02Lux@F1.6, ·2 Warm lights, 15m<br>·Smart IR, IR Range: 50m ·Built-in Mic<br>·Operating Conditions -30°~60°, 0~95% RH<br>·POE, IP67                                                                                                                                                                                                                                                                                                                                          | IRR 59,800,000 |
| 7  | <a href="#">TC-C34XN Spec: I3W/E/Y/2.8MM/V4.2</a> |  | 4MP Fixed Starlight IR Turret Camera- ·Metal+Plastic Housing -Up to 2688X1520@25fps<br>·S+265/H.265/H.264 -Min. illumination Color: 0.02Lux@F1.6<br>·2 Warm lights, 15m, ·Smart IR, IR Range: 30m -Built-in Mic<br>·Operating Conditions -30°~60°, 0~95% RH<br>·Support tripwire and perimeter<br>·DC12V, POE                                                                                                                                                                                                                                                                                                         | IRR 59,800,000 |
| 8  | <a href="#">TC-C34XN Spec: I3/E/Y/2.8MM/V5.0</a>  |  | 4MP Fixed Turret Camera, ·Metal+Plastic Housing -Up to 2688X1520@25fps<br>·S+265/H.265/H.264 -Min. illumination Color: 0.02Lux@F1.6<br>·2 Warm lights, 15m, ·Smart IR, IR Range: 30m -Built-in Mic<br>·Operating Conditions -30°~60°, 0~95% RH<br>·Support tripwire and perimeter<br>·DC12V, POE                                                                                                                                                                                                                                                                                                                      | IRR 54,000,000 |
| 9  | <a href="#">TC-R3105 SPEC: I/B/P/L/S</a>          |  | 5ch PSE NVR - HD Input · S+265/H.265/H.264 video formats · Connectable to the third-party network cameras · Support live view, storage, and playback of the connected camera at up to 6MP resolution HD Output · 1xHDMI and 1xVGA simultaneous outputs · HDMI Video output at up to 4K resolution HD Storage<br>· 1 SATA interface, up to 8TB for 1 HDD · S+265 compression effectively reduces the storage space and costs by up to 75% HD Transmission · 1xRJ45 self-adaptive 10/100 Mbps network interface · PoE Port: 4xRJ45 self-adaptive 10/100 Mbps                                                            | IRR 46,500,000 |
| 10 | <a href="#">TC-R3110 SPEC: I/B/P8/L/S</a>         |  | 10ch PSE NVR - HD Input · Plug and play · S+265/H.265/S+264/H.264 video formats · Connectable to the third-party network cameras · Up to 10-channel input · 8 PoE ports · Supports live view, storage, and playback of the connected camera at up to 6MP resolution HD Output · 1xHDMI output · HDMI Video output at up to 4K resolution HD Storage · 1 SATA interfaces, up to 6TB for each HDD · S+265 compression effectively reduces the storage space and costs by up to 75% HD Transmission · 1xRJ45 self-adaptive 10/100 Mbps network interface · PoE Port: 8xRJ45 self-adaptive 10/100 Mbps network interfaces | IRR 57,000,000 |

### Wifi - Series

|    |                                                   |                                                                                     |                                                                                                                                                                                                                                                                                     |                |
|----|---------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------|
| 11 | <a href="#">TC-C32WN spec: I5/Y/WIFI/4MM/V4.0</a> |  | 2MP Fixed IR Wi-Fi Bullet Camera - Metal+Plastic Housing ·Up to 1920x1080@30fps ·S+265/H.265/H.264<br>·Min. illumination Color: 0.02Lux@F2.0 ·Smart IR, IR Range: 50m ·Operating Conditions -35°C~65°C, 0~95% RH ·Built-in Mic, SD Card Slot, Reset Button ·Support Wi-Fi ·IP67     | IRR 45,000,000 |
| 12 | <a href="#">TC-C32KN spec: I3/Y/WIFI/2.8MM</a>    |  | 2MP Fixed IR Wi-Fi Dome Camera - Metal+Plastic Housing ·Up to 1920x1080@30fps ·S+265/H.265/H.264<br>·Min. illumination Color: 0.02Lux@F2.0 ·Smart IR, IR Range: 30m ·Operating Conditions -35°C~65°C, 0~95% RH ·Built-in Mic, SD Card Slot, Reset Button ·Support Wi-Fi ·IP67, IK10 | IRR 45,000,000 |

### Super lite-Lite & Eco - Series

|    |                                                    |                                                                                     |                                                                                                                                                                                                                                                                            |                |
|----|----------------------------------------------------|-------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------|
| 13 | <a href="#">TC-C32HN Spec: I3/E/Y/C/2.8mm/V4.1</a> |  | 2MP Fixed IR Turret Camera - Metal+Plastic Housing ·Up to 1920x1080@30fps ·S+265/H.265/H.264 ·Min. illumination Color: 0.02Lux@F2.0 ·Smart IR, IR Range: 30m ·Built-in Mic ·Support tripwire and perimeter<br>·Operating Conditions -30°C~60°C, 0~95% RH ·POE, DC12V ·IP66 | IRR 31,000,000 |
|----|----------------------------------------------------|-------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------|

|                    |                                                            |                                                                                     |                                                                                                                                                                                                                                                                                                                                                                                    |                 |
|--------------------|------------------------------------------------------------|-------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------|
| 14                 | <a href="#">TC-C32WS Spec:I5/E/Y/M/4mm/V4.0</a>            |      | 2MP Fixed Starlight IR Bullet Camera - Metal+Plastic Housing ·Up to 1920x1080@30fps<br>·S+265/H.265/H.264 ·Min. illumination Color: 0.002Lux@F1.6 ·Smart IR, IR Range: 50m ·Support tripwire and perimeter ·Built-in Mic, SD Card Slot, Reset Button ·Audio I/O 1/1, Alarm I/O 1/1 ·Operating Conditions -35°C~65°C, 0~95% RH ·POE, IP67                                           | IRR 50,000,000  |
| 15                 | <a href="#">TC-C32GS spec:<br/>I5/E/Y/C/SD/2.8MM/V4.2</a>  |    | 2MP Fixed Starlight IR Bullet Camera, ·Metal+Plastic Housing<br>·Up to 1920 ×1080@30fps ·S+265/H.265/H.264<br>·Min. illumination Color: 0.002Lux@F1.6, ·Smart IR, IR Range: 50m ·Built-In Mic<br>·Support tripwire and perimeter<br>·Operating Conditions -30°C~60°C, 0~95% RH<br>·POE, IP67                                                                                       | IRR 55,900,000  |
| 16                 | <a href="#">TC-C32HS I3/E/Y/C/SD/2.8MM/V4.2</a>            |    | 2MP Fixed Starlight IR Turret Camera, ·Metal+Plastic Housing<br>·Up to 1920x1080@30fps ·S+265/H.265/H.264<br>·Min. illumination Color: 0.002Lux@F1.6, ·Smart IR, IR Range: 30m ·Built-In Mic<br>·Support tripwire and perimeter<br>·Operating Conditions -30°C~60°C, 0~95% RH<br>·POE, IP66                                                                                        | IRR 55,900,000  |
| 17                 | <a href="#">TC-C34GS I5/E/Y/C/SD/2.8MM/V4.2</a>            |    | 4MP Fixed Starlight IR Bullet Camera, ·Metal+Plastic Housing<br>·Up to 2560×1440@25fps ·S+265/H.265/H.264<br>·Min. illumination Color: 0.002Lux@F1.6, ·Smart IR, IR Range: 50m ·Built-In Mic<br>·Support tripwire and perimeter<br>·Operating Conditions -30°C~60°C, 0~95% RH<br>·POE, IP67                                                                                        | IRR 64,000,000  |
| 18                 | <a href="#">TC-C34HS Spec:<br/>I3/E/Y/C/SD/2.8MM/V4.2</a>  |    | 4MP Fixed Starlight IR Turret Camera, ·Metal+Plastic Housing<br>·Up to 2560×1440@25fps ·S+265/H.265/H.264<br>·Min. illumination Color: 0.002Lux@F1.6, ·Smart IR, IR Range: 30m ·Built-In Mic<br>·Support tripwire and perimeter<br>·Operating Conditions -30°C~60°C, 0~95% RH<br>·POE, IP66                                                                                        | IRR 64,000,000  |
| 19                 | <a href="#">TC-C35WS<br/>Spec:I5/E/Y/M/2.8mm/V4.0</a>      |    | 5MP Fixed Starlight IRBullet Camera - Full Metal Housing ·Up to 2592x1944@20fps ·S+265/H.265/H.264<br>·Min. illumination Color: 0.002Lux@F1.6 ·120dB WDR ·Smart IR, IR Range: 50m ·Support tripwire and perimeter ·Built-in Mic, SD Card Slot, Reset Button ·Operating Conditions -40°C~60°C, 0~95% RH ·POE, IP67                                                                  | IRR 87,500,000  |
| 20                 | <a href="#">TC-C35XS Spec:I3/E/Y/C/H/2.8MM</a>             |    | 5MP Starlight Mini IP Turret ·Up to 2592X1944@20fps<br>·S+265/H.265/H.264 ·Min. illumination Color: 0.002Lux@F1.6<br>Plastic ·120dB WDR ·Smart IR, IR Range: 30m, IP66, Built-in Micro SD card slot , up to 512GB<br>·Operating Conditions -40°C~60°C, 0~95% RH ·POE                                                                                                               | IRR 88,000,000  |
| 21                 | <a href="#">TC-C35KS Spec:I3/E/Y/2.8mm/V4.0</a>            |   | 5MP Fixed Starlight IR Dome Camera - Metal+Plastic Housing ·Up to 2592x1944@20fps<br>·S+265/H.265/H.264 ·Min. illumination Color: 0.002Lux@F1.6 ·120dB WDR ·Smart IR, IR Range: 30m<br>·Support tripwire and perimeter ·Built-in Mic, SD Card Slot, Reset Button ·Operating Conditions -40°C~60°C, 0~95% RH ·POE, IP67, IK10                                                       | IRR 82,000,000  |
| 22                 | <a href="#">TC-C35KS<br/>Spec:I3/E/Y/M/H/2.8mm/V4.0</a>    |  | ·Full Metal Housing ·Up to 2592x1944@30fps, 1920x1080@60fps<br>·S+265/H.265/H.264/M-JPEG Min. illumination Color: 0.002Lux@F1.6<br>·Smart IR, IR Range: 30m ·Support Video Analytics ·Support Human/Vehicle Classification<br>·Support Face Capture Mode ·Built-in Mic, audio I/O 1/1, alarm I/O 1/1<br>·Plugin Free Operating Conditions -40°C~65°C, 0~95% RH<br>·POE, IP67, IK10 | IRR 129,000,000 |
| 23                 | <a href="#">TC-C38WS<br/>Spec:I5/E/Y/M/2.8mm(4mm)/V4.0</a> |  | 8MP Fixed Starlight IR Bullet Camera, ·Full Metal Housin, ·Up to 3840x2160@20fps<br>·S+265/H.265/H.264, ·Min. illumination Color: 0.003Lux@F1.6, ·120dB WDR<br>·Smart IR, IR Range: 50m, Support tripwire and perimeter<br>·Built-in Mic, SD Card Slot, Reset Button<br>·Operating Conditions -40 ~65 °C, 0~95% RH, ·POE, IP67                                                     | IRR 128,000,000 |
| 24                 | <a href="#">TC-C38XS Spec:<br/>I3/E/Y/M/2.8mm/V4.0</a>     |  | 8MP Fixed Starlight IR Turret Camera ·Full Metal Housing ·Up to 3840x2160@20fps ·S+265/H.265/H.264<br>·Min. illumination Color: 0.003Lux@F1.6 ·120dB WDR ·Smart IR, IR Range: 30m ·Support tripwire and perimeter ·Built-in Mic, SD Card Slot, Reset Button ·Operating Conditions -40°C~65°C, 0~95% RH ·POE, IP67                                                                  | IRR 112,000,000 |
| 25                 | <a href="#">TC-C38KS SPEC:<br/>I3/E/Y/2.8mm/V4.0</a>       |  | 8MP Fixed Starlight IR Dome Camera ·Metal+Plastic Housing ·Up to 3840x2160@20fps<br>·S+265/H.265/H.264 ·Min. illumination Color: 0.003Lux@F1.6 ·120dB WDR ·Smart IR, IR Range: 30m<br>·Support tripwire and perimeter ·Built-in Mic, SD Card Slot, Reset Button ·Operating Conditions -35°~65°, 0~95% RH ·POE, IP67, IK10                                                          | IRR 109,000,000 |
| Color Maker Series |                                                            |                                                                                     |                                                                                                                                                                                                                                                                                                                                                                                    |                 |
| 26                 | <a href="#">TC-C32XP Spec:W/E/Y/2.8mm/V4.1</a>             |  | 2MP Fixed Color Maker Turret Camera - Metal+Plastic Housing ·Up to 1920x1080@30fps<br>·S+265/H.265/H.264 ·Min. illumination Color: 0.002Lux@F1.6 ·Smart IR, IR Range: 30m ·2 Warm lights, 15m ·Support tripwire and perimeter ·Built-in Mic, support max 512G Micro SD Card ·Operating Conditions -40°C~65°C, 0~95% RH ·POE,DC12V ·IP66                                            | IRR 45,000,000  |
| 27                 | <a href="#">TC-C32XP<br/>Spec:I3W/E/Y/2.8mm/V4.2</a>       |  | 2MP Fixed Color Maker Turret Camera - Metal+Plastic Housing ·Up to 1920x1080@30fps<br>·S+265/H.265/H.264 ·Min. illumination Color: 0.002Lux@F1.6 ·Smart IR, IR Range: 30m ·2 Warm lights, 30m ·Support tripwire and perimeter ·Built-in Mic, support max 512G Micro SD Card ·Operating Conditions -40°C~65°C, 0~95% RH ·POE,DC12V ·IP66                                            | IRR 49,500,000  |
| 28                 | <a href="#">TC-C32WP<br/>Spec:I5W/E/Y/M/2.8mm/V4.2</a>     |  | ·Default: Plastic, M: Metal Housing ·Up to 1920x1080@30fps<br>·S+265/H.265/H.264 ·Min. illumination Color: 0.0008Lux@F1.6<br>·2 Warm lights, 15~20m ·Smart IR, IR Range: 50m ·Support tripwire and perimeter<br>·Built-in Mic, SD Card Slot, Reset Button<br>·Operating Conditions -35°C~60°C, 0~95%RH<br>·POE, IP67                                                               | IRR 63,000,000  |
| 29                 | <a href="#">TC-C34XS I3W/E/Y/2.8MM/V4.2</a>                |  | 4MP Fixed Color Maker Turret Camera - Metal+plastic housing Up to 4MP,2592×1520@25fps<br>S+265/H.265/H.264/H.264M/H.264H Color:0.002Lux@F1.6,AGC ON),B/W:0Lux with IR range up to 30m Built-in Mic Support microSD/microSDHC/microSDXC card,up to 512GB Operating conditions -40°C~65°C, ≤95%RH DC12V±25%,Max. 6W, PoE:IEEE 802.3af,Max. 7W IP66                                   | IRR 49,500,000  |

|                           |                                                               |                                                                                     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |                 |
|---------------------------|---------------------------------------------------------------|-------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------|
| 30                        | <a href="#">TC-C34UP W/E/Y/M/4MM/V4.0</a>                     |      | 4MP Fixed Color Maker Bullet Camera - Full Metal Housing ·Up to 2560x1440@25fps ·S+265/H.265/H.264 ·Min. illumination Color: 0.0002Lux@F1.0 ·120dB WDR ·4 Warmlights, 20~30m ·Support tripwire and perimeter ·Built-in Mic, SD Card Slot, Reset Button ·Operating Conditions -40°C~60°C, 0~95% RH ·POE, IP67                                                                                                                                                                                                                                                                                                                                        | IRR 105,000,000 |
| <b>Motorized Series</b>   |                                                               |                                                                                     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |                 |
| 31                        | <a href="#">TC-C35US Spec: I8/A/E/Y/M/C/H/2.7-13.5MM</a>      |    | 5MP Motorized Starlight IR Bullet Camera - Full Metal Housing ·Motorized Lens 2.7-13.5mm ·Up to 2592x1944@20fps ·S+265/H.265/H.264 ·Min. illumination Color: 0.002Lux@F1.6 ·Smart IR, IR Range: 80m ·Support tripwire and perimeter ·Built-in Mic, support max 512G Micro SD Card ·Audio I/O 1/1, Alarm I/O 1/1 ·Operating Conditions -35°C~65°C, 0~95% RH ·DC12V, POE ·IP67, IK10                                                                                                                                                                                                                                                                  | IRR 135,000,000 |
| 32                        | <a href="#">TC-C35MS Spec: I3/A/E/Y/M/C/H/2.7-13.5mm/V4.0</a> |    | 5MP Motorized Starlight IR Dome Camera - Full Metal Housing ·Motorized Lens 2.7-13.5mm ·Up to 2592x1944@20fps ·S+265/H.265/H.264 ·Min. illumination Color: 0.002Lux@F1.6 ·Smart IR, IR Range: 30m ·Support tripwire and perimeter ·Built-in Mic, SD Card Slot, Reset Button ·Audio I/O 1/1, Alarm I/O 1/1 ·Operating Conditions -35°C~60°C, 0~95% RH ·POE, IP66, IK10                                                                                                                                                                                                                                                                               | IRR 129,500,000 |
| 33                        | <a href="#">TC-C38MS Spec: I5/A/E/Y/M/H/2.7-13.5/V4.0</a>     |    | ·Full Metal Housing ·Motorized Lens 2.7-13.5mm ·Up to 3840x2160@30fps ·S+265/H.265/H.264/M-JPEG ·Min. illumination Color: 0.003Lux@F1.6 ·Smart IR, IR Range: 50m ·Support Video Analytics ·Support Human/Vehicle Classification ·Built-in Mic, audio I/O 1/1, alarm I/O 2/1 ·Plugin Free ·Operating Conditions -35°C~65°C, 0~95% RH ·POE, IP67, IK10                                                                                                                                                                                                                                                                                                | IRR 240,000,000 |
| <b>SPEED DOM - Series</b> |                                                               |                                                                                     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |                 |
| 34                        | <a href="#">TC-H324S Spec: 25X/I/E/V3.0</a>                   |    | 2MP 25x Starlight IR PTZ Camera ·Up to 1920X1080@30fps ·Min. illumination Color: 0.001Lux@F1.5 ·Optical zoom: 25x, digital zoom 16x ·Support Human/Vehicle Classification ·Smart IR, IR Range: 150m ·S+265/H.265/H.264/M-JPEG ·Plugin Free ·IP66                                                                                                                                                                                                                                                                                                                                                                                                    | IRR 400,000,000 |
| 35                        | <a href="#">TC-H326S Spec: 33X/I/E+/A/V3.0</a>                |    | 2MP 33x Starlight IR POE AI PTZ Camera ·Up to 1920X1080@30fps ·Min. illumination Color: 0.001Lux@F1.5 ·Optical zoom: 33x, digital zoom 16x ·Smart IR, IR Range: 200m ·S+265/H.265/H.264/M-JPEG ·Intelligent monitoring/ Face Capture mode ·Support Human/Vehicle Classification ·Support Auto-tracking ·Plugin Free ·IP66                                                                                                                                                                                                                                                                                                                           | IRR 635,000,000 |
| 36                        | <a href="#">TC-H356S Spec: 30X/I/E+/A/V3.0</a>                |    | 5MP 30x Starlight IR POE AI PTZ Camera ·Support Auto-tracking ·Up to 2880x1620@30fps ·Min. illumination Color: 0.001Lux@F1.5 ·Optical zoom: 30x, digital zoom 16x ·Smart IR, IR Range: 200m ·S+265/H.265/H.264/M-JPEG ·Intelligent monitoring/ Face Capture mode ·Support Human/Vehicle Classification ·Plugin Free ·IP66                                                                                                                                                                                                                                                                                                                           | IRR 850,000,000 |
| <b>NVR - Series</b>       |                                                               |                                                                                     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |                 |
| 37                        | <a href="#">TC-R3105 I/B/I/EU</a>                             |  | 1 HDD 5ch NVR ·HD Input ·S+265/H.265/H.264 video formats ·Connectable to the third-party network cameras ·Support live view, storage, and playback of the connected camera at up to 6MP resolution HD Output ·HDMI and VGA simultaneous output ·HDMI Video output at up to 4K (3840x2160) resolution HD Storage ·1 SATA interface, up to 8TB for 1 HDD ·S+265 compression effectively reduces the storage space and costs by up to 75% HD Transmission ·1xRJ45 self-adaptive 10/100 Mbps network interface                                                                                                                                          | IRR 39,000,000  |
| 38                        | <a href="#">TC-R3105 SPEC: I/B/P/L</a>                        |  | 1 HDD 5ch PSE NVR ·HD Input ·S+265/H.265/H.264 video formats ·Connectable to the third-party network cameras ·Support live view, storage, and playback of the connected camera at up to 6MP resolution HD Output ·1xHDMI and 1xVGA simultaneous outputs ·HDMI Video output at up to 4K resolution HD Storage ·1 SATA interface, up to 8TB for 1 HDD ·S+265 compression effectively reduces the storage space and costs by up to 75% HD Transmission ·1xRJ45 self-adaptive 10/100 Mbps network interface ·PoE Port: 4xRJ45 self-adaptive 10/100 Mbps network interfaces                                                                              | IRR 54,500,000  |
| 39                        | <a href="#">TC-R3108 Spec: I/B/V2.0</a>                       |  | 1 HDD 8ch NVR ·HD Input ·S+265/H.265/H.264 video formats ·Connectable to the third-party network cameras ·Support live view, storage, and playback of the connected camera at up to 6MP resolution HD Output ·1xHDMI and 1xVGA simultaneous outputs ·HDMI Video output at up to 4K resolution HD Storage ·1 SATA interface, up to 8TB for 1 HDD ·S+265 compression effectively reduces the storage space and costs by up to 75% HD Transmission ·1xRJ45 self-adaptive 10/100 Mbps network interface                                                                                                                                                 | IRR 44,000,000  |
| 40                        | <a href="#">TC-R3110 SPEC: I/B/V3.0</a>                       |  | 1HDD 10ch NVR ·HD Input ·S+265/H.265/H.264 video formats ·Connectable to the third-party network cameras ·Up to 10-channel input ·Supports live view, storage, and playback of the connected camera at up to 6MP resolution HD Output ·HDMI and VGA simultaneous output ·HDMI Video output at up to 4K (3840x2160) resolution HD Storage ·1 SATA interface, up to 10TB for 1 HDD ·S+265 compression effectively reduces the storage space and costs by up to 75% HD Transmission ·1xRJ45 self-adaptive 10/100 Mbps network interface                                                                                                                | IRR 72,000,000  |
| 41                        | <a href="#">TC-R3220 Spec: I/B/K/V3.1</a>                     |  | 2HDD 20ch NVR ·HD Input ·S+265/H.265/H.264 video formats ·Connectable to the third-party network cameras ·Up to 20-channel input ·Supports live view, storage, and playback of the connected camera at up to 8MP resolution HD Output ·HDMI and VGA simultaneous output ·HDMI Video output at up to 4K (3840x2160) resolution HD Storage ·2 SATA interfaces, up to 10TB for each HDD ·S+265 compression effectively reduces the storage space and costs by up to 75% HD Transmission ·1xRJ45 self-adaptive 10/100 Mbps network interface                                                                                                            | IRR 207,000,000 |
| 42                        | <a href="#">TC-R3220 Spec: I/B/P16/K/V3.0</a>                 |  | 2HDD 20ch PSE NVR ·HD Input ·Plug and play ·S+265/H.265/H.264 video formats ·Connectable to the third-party network cameras ·Up to 20-channel input ·16 PoE ports ·Supports live view, storage, and playback of the connected camera at up to 8MP resolution HD Output ·1xHDMI and 1xVGA simultaneous outputs ·HDMI Video output at up to 4K (3840x2160) resolution HD Storage ·2 SATA interfaces, up to 10TB for each HDD ·S+265 compression effectively reduces the storage space and costs by up to 75% HD Transmission ·1xRJ45 self-adaptive 10/100/1000 Mbps network interface ·PoE Port: 16xRJ45 self-adaptive 10/100 Mbps network interfaces | IRR 240,000,000 |
| 43                        | <a href="#">TC-R3432 Spec: I/B/K/V3.1</a>                     |  | 4HDD 32ch NVR ·HD Input ·S+265/H.265/S+264/H.264 video formats ·Connectable to the third-party network cameras ·Support live view, storage, and playback of the connected camera at up to 8MP resolution HD Output ·1xHDMI and 1xVGA simultaneous outputs ·HDMI Video output at up to 4K resolution HD Storage ·1 SATA interface, up to 10TB for 1 HDD ·S+265 compression effectively reduces the storage space and costs by up to 75% HD Transmission ·1xRJ45 self-adaptive 10/100 Mbps network interface ·PoE Port: 8xRJ45 self-adaptive 10/100 Mbps network interfaces                                                                           | IRR 290,000,000 |
| 44                        | <a href="#">TC-R3440 Spec: I/B/N/V4.0</a>                     |  | 4HDD 40ch NVR ·HD Input ·S+265/H.265/S+264/H.264 video formats ·Connectable to the third-party network cameras ·Support live view, storage, and playback of the connected camera at up to 16MP resolution HD Output ·1xHDMI and 1xVGA independent outputs ·HDMI Video output at up to 4K resolution HD Storage ·4 SATA interface, up to 10TB for 1 HDD ·S+265 compression effectively reduces the storage space and costs by up to 75% HD Transmission ·2xRJ45 self-adaptive 10/100/1000 Mbps network interface                                                                                                                                     | IRR 510,000,000 |

|    |                                          |                                                                                   |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |                 |
|----|------------------------------------------|-----------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------|
| 45 | <a href="#">TC-R3840 Spec:I/B/N</a>      |   | 8HDD 40ch NVR - HD Input • S+265/H.265/S+264/H.264 video formats • Connectable to the third-party network cameras • Support live view, storage, and playback of the connected camera at up to 16MP resolution HD Output • HDMI and VGA independent outputs • HDMI Video output at up to 4K resolution HD Storage • 8 SATA interface, up to 18TB for 1 HDD • S+265 compression effectively reduces the storage space and costs by up to 75% HD Transmission • 2×RJ45 self-adaptive 10/100/1000 Mbps network interface | IRR 680,000,000 |
| 46 | <a href="#">TC-R3880 Spec:I/B/N/V4.0</a> |  | 8HDD 80ch NVR - HD Input • S+265/H.265/S+264/H.264 video formats • Connectable to the third-party network cameras • Support live view, storage, and playback of the connected camera at up to 16MP resolution HD Output • HDMI and VGA independent outputs • HDMI Video output at up to 4K resolution HD Storage • 8 SATA interface, up to 18TB for 1 HDD • S+265 compression effectively reduces the storage space and costs by up to 75% HD Transmission • 2×RJ45 self-adaptive 10/100/1000 Mbps network interface | IRR 830,000,000 |

tiandy-cctv.com | 02152605

تهران، خیابان سه‌رودی، کوچه سرمد، پلاک ۱




لیست قیمت رسمی اسفند ۱۴۰۳

تارتن دژ آریانا

فروش محصولات هایلوک

جهت اطلاع از تخفیف جشنواره هر محصول تماس بگیرید:

۰۲۱-۸۸۵۰۰۰۲۰



|                                                                                   | 1                                                                                 | 2                                                                                 | 3                                                                                  | 4                                                                                   | 5                                                                                   | 6                                                                                   |
|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
|                                                                                   | THC-B120-PC                                                                       | THC-B120-MC                                                                       | THC-B127-LMS                                                                       | THC-B220-M                                                                          | THC-T120-PC                                                                         | THC-T127-LMS                                                                        |
|  |  |  |  |  |  |  |
| Price (Rials)                                                                     | ۱۰,۸۱۲,۰۰۰                                                                        | ۱۱,۹۳۰,۰۰۰                                                                        | ۱۹,۳۸۰,۰۰۰                                                                         | ۲۰,۴۰۰,۰۰۰                                                                          | ۹,۹۸۸,۰۰۰                                                                           | ۱۹,۳۸۰,۰۰۰                                                                          |
| Camera Type                                                                       | Bullet                                                                            | Bullet                                                                            | Bullet                                                                             | Bullet                                                                              | Dome                                                                                | Dome                                                                                |
| Resolution                                                                        | 2 Megapixel                                                                       | 2 Megapixel                                                                       | 2 Megapixel                                                                        | 2 Megapixel                                                                         | 2 Megapixel                                                                         | 2 Megapixel                                                                         |
| Lens                                                                              | 2.8mm Fixed                                                                       | 2.8mm Fixed                                                                       | 2.8mm Fixed                                                                        | 2.8mm Fixed                                                                         | 2.8mm Fix                                                                           | 2.8mm Fixed                                                                         |
| Viewing Angle                                                                     | 96.5°                                                                             | 105°                                                                              | 100°                                                                               | 105°                                                                                | 96.5°                                                                               | 100°                                                                                |
| IR Range                                                                          | Up to 20m IR                                                                      | Up to 20m (EXIR)                                                                  | Up to 20m (Color)                                                                  | Up to 40m (EXIR)                                                                    | Up to 20m (EXIR)                                                                    | Up to 20/30m (Color)                                                                |
| Body Type                                                                         | Plastic                                                                           | Metal                                                                             | Metal                                                                              | Metal                                                                               | Plastic                                                                             | Metal                                                                               |
| IP Standard                                                                       | IP66                                                                              | IP66                                                                              | IP66                                                                               | IP66                                                                                | IP66                                                                                | IP66                                                                                |
| OSD Menu                                                                          | No                                                                                | No                                                                                | No                                                                                 | No                                                                                  | No                                                                                  | No                                                                                  |
| WDR                                                                               | DWDR                                                                              | DWDR                                                                              | DWDR                                                                               | DWDR                                                                                | DWDR                                                                                | DWDR                                                                                |
| Other Features                                                                    | Smart IR, BLC, 2D DNR, Switchable TVI/AHD/CVI/CVBS                                | Smart IR, BLC, 2D DNR, Switchable TVI/AHD/CVI/CVBS                                | Smart IR, HLC, BLC, Switchable TVI/AHD/CVI/CVBS                                    | Smart IR, BLC, 2D DNR, Switchable TVI/AHD/CVI/CVBS                                  | Smart IR, Switchable TVI/AHD/CVI/CVBS                                               | Smart IR, HLC, BLC, Switchable TVI/AHD/CVI/CVBS                                     |

|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |                                                 |                                                 |                                                 |                                                 |                                                    |                                                    |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------|-------------------------------------------------|-------------------------------------------------|-------------------------------------------------|----------------------------------------------------|----------------------------------------------------|
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | 7                                               | 8                                               | 9                                               | 10                                              | 11                                                 | 12                                                 |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | THC-B150-M                                      | THC-T150-M                                      | THC-B257-LMS                                    | THC-T257-LMS                                    | THC-B320-VF                                        | THC-T320-VF                                        |
|        |                                                 |                                                 |                                                 |                                                 |                                                    |                                                    |
| Price (Rials)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | ٢١,٤٢٠,٠٠٠                                      | ٢١,٤٢٠,٠٠٠                                      | ٣٥,٠٠٠,٠٠٠                                      | ٣٥,٠٠٠,٠٠٠                                      | ٣٩,٧٢٠,٠٠٠                                         | ٣٩,٧٢٠,٠٠٠                                         |
| Camera Type                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | Bullet                                          | Dome                                            | Bullet                                          | Dome                                            | Bullet                                             | Dome                                               |
| Resolution                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | 5 Megapixel                                     | 5 Megapixel                                     | 3K                                              | 3K                                              | 2 Megapixel                                        | 2 Megapixel                                        |
| Lens                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | 2.8mm Fixed                                     | 2.8mm Fixed                                     | 2.8mm Fixed                                     | 2.8mm Fixed                                     | 2.8 - 12mm Varifocal                               | 2.8 - 12mm Varifocal                               |
| Viewing Angle                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | 85°                                             | 85°                                             | 104.9°                                          | 104.9°                                          | 111.5°-33.4°                                       | 111.5°-33.4°                                       |
| IR Range                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | Up to 20m (IR)                                  | Up to 20m (IR)                                  | Up to 40m (Color)                               | Up to 20/40m (Color)                            | Up to 40m (EXIR)                                   | Up to 40m (EXIR)                                   |
| Body Type                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | Metal                                           | Metal                                           | Metal                                           | Metal                                           | Metal & Plastic                                    | Metal & Plastic                                    |
| IP Standard                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | IP66                                            | IP66                                            | IP66                                            | IP66                                            | IP66                                               | IP66                                               |
| OSD Menu                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | No                                              | No                                              | No                                              | No                                              | No                                                 | No                                                 |
| WDR                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | DWDR                                            | DWDR                                            | DWDR                                            | DWDR                                            | DWDR                                               | DWDR                                               |
| Other Features                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | Smart IR, HLC, BLC, Switchable TVI/AHD/CVI/CVBS | Smart IR, HLC, BLC, Switchable TVI/AHD/CVI/CVBS | Smart IR, HLC, BLC, Switchable TVI/AHD/CVI/CVBS | Smart IR, HLC, BLC, Switchable TVI/AHD/CVI/CVBS | Smart IR, BLC, 2D DNR, Switchable TVI/AHD/CVI/CVBS | Smart IR, BLC, 2D DNR, Switchable TVI/AHD/CVI/CVBS |

| 13          | 14          | 15          | 16          | 17          | 18          |
|-------------|-------------|-------------|-------------|-------------|-------------|
| DVR-204G-M1 | DVR-208G-M1 | DVR-216G-M1 | DVR-204Q-M1 | DVR-208Q-M1 | DVR-216Q-M1 |

HiLook



| Price (Rials)        | ۳۲,۲۳۲,۰۰۰                                                                              | ۳۶,۷۲۰,۰۰۰                                                                                | ۵۹,۱۶۰,۰۰۰                                                                                | ۴۴,۸۸۰,۰۰۰                                                                              | ۶۷,۳۲۰,۰۰۰                                                                               | ۱۲۰,۳۶۰,۰۰۰                                                                              |
|----------------------|-----------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------|
| DVR Type             | 4-ch<br>TVI/AHD/CVI/CVBS                                                                | 8-ch<br>TVI/AHD/CVI/CVBS                                                                  | 16-ch<br>TVI/AHD/CVI/CVBS                                                                 | 4-ch<br>TVI/AHD/CVI/CVBS                                                                | 8-ch<br>TVI/AHD/CVI/CVBS                                                                 | 16-ch<br>TVI/AHD/CVI/CVBS                                                                |
| Analog Video Input   | 4Ch. HDTVI/Analog<br>AHD Up to 2MP                                                      | 8Ch. HDTVI/Analog<br>AHD Up to 2MP                                                        | 16Ch. HDTVI/Analog<br>AHD Up to 2MP                                                       | 4Ch. HDTVI/Analog<br>AHD Up to 3K                                                       | 8Ch. HDTVI/Analog<br>AHD Up to 3K                                                        | 16Ch. HDTVI/Analog<br>AHD Up to 3K                                                       |
| Video Output         | 1 Port HDMI<br>1 Port VGA<br>2Ch. USB                                                   | 1 Port HDMI<br>1 Port VGA<br>2Ch. USB                                                     | 1 Port HDMI<br>1 Port VGA<br>2Ch. USB                                                     | 1 Port HDMI<br>1 Port VGA<br>2Ch. USB                                                   | 1 Port HDMI<br>1 Port VGA<br>2Ch. USB                                                    | 1 Port HDMI<br>1 Port VGA<br>2Ch. USB                                                    |
| SATA Interface       | 1 HDD up to 4TB                                                                         | 1 HDD up to 4TB                                                                           | 1 HDD up to 6TB                                                                           | 1 HDD up to 10TB                                                                        | 1 HDD up to 10TB                                                                         | 1 HDD up to 10TB                                                                         |
| Compression Standard | H.265 Pro+                                                                              | H.265 Pro+                                                                                | H.265 Pro+                                                                                | H.265 Pro+                                                                              | H.265 Pro+                                                                               | H.265 Pro+                                                                               |
| Other Features       | 1ch (Up to 5-ch) IP<br>camera input (up to 2<br>MP), Deep learning,<br>Motion Detection | 2-ch (Up to 10-ch) IP<br>camera input (up to 5<br>MP), Deep learning,<br>Motion Detection | 2-ch (Up to 18-ch) IP<br>camera input (up to 5<br>MP), Deep learning,<br>Motion Detection | 1ch (Up to 5-ch) IP<br>camera input (up to 6<br>MP), Deep learning,<br>Motion Detection | 2ch (Up to 10-ch) IP<br>camera input (up to 6<br>MP), Deep learning,<br>Motion Detection | 2ch (Up to 18-ch) IP<br>camera input (up to 6<br>MP), Deep learning,<br>Motion Detection |

## DVR-232Q-M2

HiLook



|                      |                                                                                           |
|----------------------|-------------------------------------------------------------------------------------------|
| Price (Rials)        | ۳۰۶,۰۰۰,۰۰۰                                                                               |
| DVR Type             | 32-ch<br>TVI/AHD/CVI/CVBS                                                                 |
| Analog Video Input   | 32Ch. HDTVI/Analog<br>AHD Up to 3K                                                        |
| Video Output         | 1 Port HDMI<br>1 Port VGA<br>2Ch. USB                                                     |
| SATA Interface       | 2 HDD up to 10TB                                                                          |
| Compression Standard | H.265 Pro+                                                                                |
| Other Features       | 2-ch (Up to 34-ch) IP<br>camera input (up to 5<br>MP), Deep learning,<br>Motion Detection |




لیست قیمت رسمی اسفند ۱۴۰۳

تارتن دژ آریانا

فروش محصولات هایلوک

جهت اطلاع از تخفیف جشنواره هر محصول تماس بگیرید:

۰۲۱-۸۸۵۰۰۰۲۰





|                    | 1                                   | 2                                   | 3                                                 | 4                                                 | 5                                         | 6                                         |
|--------------------|-------------------------------------|-------------------------------------|---------------------------------------------------|---------------------------------------------------|-------------------------------------------|-------------------------------------------|
|                    | IPC-B121H-C                         | IPC-T221H-C                         | IPC-B120HA-LU                                     | IPC-T220HA-LU                                     | IPC-B140H                                 | IPC-T240H                                 |
| Price (Rials)      | ۲۵,۱۵۰,۰۰۰                          | ۲۵,۱۵۰,۰۰۰                          | ۳۸,۷۶۰,۰۰۰                                        | ۳۸,۷۶۰,۰۰۰                                        | ۵۱,۸۲۰,۰۰۰                                | ۵۱,۸۲۰,۰۰۰                                |
| Camera Type        | Bullet                              | Dome                                | Bullet                                            | Dome                                              | Bullet                                    | Dome                                      |
| Resolution         | 2 Megapixel                         | 2 Megapixel                         | 2 Megapixel                                       | 2 Megapixel                                       | 4 Megapixel                               | 4 Megapixel                               |
| Lens               | 2.8mm Fixed                         | 2.8mm Fixed                         | 2.8mm Fixed                                       | 2.8mm Fixed                                       | 2.8mm Fixed                               | 2.8mm Fixed                               |
| Viewing Angle      | 94°                                 | 94°                                 | 103°                                              | 103°                                              | 98°                                       | 98°                                       |
| IR Range           | Up to 20m IR                        | Up to 20m IR                        | Up to 30m Color                                   | Up to 30m Color                                   | Up to 30m IR                              | Up to 30m IR                              |
| Body Type          | Plastic                             | Plastic                             | Metal & Plastic                                   | Metal & Plastic                                   | Metal & Plastic                           | Metal & Plastic                           |
| Standard           | IP67                                | IP67                                | IP67                                              | IP67                                              | IP67                                      | IP67                                      |
| SD Card Support    | No                                  | No                                  | No                                                | No                                                | No                                        | No                                        |
| WDR                | DWDR                                | DWDR                                | DWDR                                              | DWDR                                              | WDR (120 dB)                              | WDR (120 dB)                              |
| Microphone Support | No                                  | No                                  | Yes                                               | Yes                                               | No                                        | No                                        |
| Other Features     | H.265+, 3D DNR, BLC, HLC, iVMS-4200 | H.265+, 3D DNR, BLC, HLC, iVMS-4200 | H.265+, 3D DNR, BLC, HLC, iVMS-4200, HiLookVision | H.265+, 3D DNR, BLC, HLC, iVMS-4200, HiLookVision | H.265+, 3D DNR, BLC, Supports Hik-Connect | H.265+, 3D DNR, BLC, Supports Hik-Connect |

|                                                                                   | 7                                                                                 | 8                                                                                 | 9                                                                                  | 10                                                                                  | 11                                                                                  | 12                                                                                  |
|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
|                                                                                   | IPC-B440HA-LU                                                                     | IPC-T240HA-LU                                                                     | IPC-B460HA-LU                                                                      | IPC-T260HA-LU                                                                       | IPC-D160HA-LU                                                                       | IPC-B480HA-LU                                                                       |
|  |  |  |  |  |  |  |
| Price (Rials)                                                                     | ٩١,٠٠٠,٠٠٠                                                                        | ٩١,٠٠٠,٠٠٠                                                                        | ٨١,٥٠٠,٠٠٠                                                                         | ٧٩,٥٠٠,٠٠٠                                                                          | ٨١,٥٠٠,٠٠٠                                                                          | ١٠٣,٨٠٠,٠٠٠                                                                         |
| Camera Type                                                                       | Bullet                                                                            | Dome                                                                              | Bullet                                                                             | Dome                                                                                | Dome                                                                                | Bullet                                                                              |
| Resolution                                                                        | 4 Megapixel                                                                       | 4 Megapixel                                                                       | 6 Megapixel                                                                        | 6 Megapixel                                                                         | 6 Megapixel                                                                         | 8 Megapixel                                                                         |
| Lens                                                                              | 4mm Fixed                                                                         | 2.8mm Fixed                                                                       | 4mm Fixed                                                                          | 2.8mm Fixed                                                                         | 2.8mm Fixed                                                                         | 4mm Fixed                                                                           |
| Viewing Angle                                                                     | 78°                                                                               | 98°                                                                               | 78°                                                                                | 113°                                                                                | 113°                                                                                | 90°                                                                                 |
| IR Range                                                                          | Up to 50m Color                                                                   | Up to 30m Color                                                                   | Up to 50m Color                                                                    | Up to 30m Color                                                                     | Up to 30m Color                                                                     | Up to 50m Color                                                                     |
| Body Type                                                                         | Metal & Plastic                                                                   | Metal & Plastic                                                                   | Metal & Plastic                                                                    | Metal & Plastic                                                                     | Metal & Plastic                                                                     | Metal & Plastic                                                                     |
| Standard                                                                          | IP67                                                                              | IP67                                                                              | IP67                                                                               | IP67                                                                                | IP67                                                                                | IP67                                                                                |
| SD Card Support                                                                   | No                                                                                | No                                                                                | No                                                                                 | No                                                                                  | No                                                                                  | No                                                                                  |
| WDR                                                                               | WDR (120 dB)                                                                      | WDR (120 dB)                                                                      | WDR (120 dB)                                                                       | WDR (120 dB)                                                                        | WDR (120 dB)                                                                        | WDR (120 dB)                                                                        |
| Microphone Support                                                                | Yes                                                                               | Yes                                                                               | Yes                                                                                | Yes                                                                                 | Yes                                                                                 | Yes                                                                                 |
| Other Features                                                                    | H.265+, 3D DNR, BLC, HLC, iVMS-4200, HiLookVision                                 | H.265+, 3D DNR, BLC, HLC, iVMS-4200, HiLookVision                                 | H.265+, 3D DNR, BLC, HLC, iVMS-4200, HiLookVision                                  | H.265+, 3D DNR, BLC, HLC, iVMS-4200, HiLookVision                                   | H.265+, 3D DNR, BLC, HLC, iVMS-4200, HiLookVision                                   | H.265+, 3D DNR, BLC, HLC, iVMS-4200, HiLookVision                                   |

13

14

15

IPC-D180HA-LU

IPC-B660HA-LZU

IPC-D660HA-LZU

HiLook



| Price (Rials)      | ۱۰۳,۸۰۰,۰۰۰                                       | ۱۳۲,۰۳۰,۰۰۰                                       | ۱۳۲,۰۳۰,۰۰۰                                       |
|--------------------|---------------------------------------------------|---------------------------------------------------|---------------------------------------------------|
| Camera Type        | Dome                                              | Bullet                                            | Dome                                              |
| Resolution         | 8 Megapixel                                       | 6 Megapixel                                       | 6 Megapixel                                       |
| Lens               | 2.8mm Fixed                                       | 2.8 - 12mm Varifocal                              | 2.8 - 12mm Varifocal                              |
| Viewing Angle      | 105°                                              | 106°-35.6°                                        | 106°-35.6°                                        |
| IR Range           | Up to 30m Color                                   | Up to 50m Color                                   | Up to 30m Color                                   |
| Body Type          | Metal & Plastic                                   | Metal & Plastic                                   | Metal & Plastic                                   |
| Standard           | IP67                                              | IP67                                              | IP67                                              |
| SD Card Support    | No                                                | Yes (Up to 512 G)                                 | Yes (Up to 512 G)                                 |
| WDR                | WDR (120 dB)                                      | WDR (120 dB)                                      | WDR (120 dB)                                      |
| Microphone Support | Yes                                               | Yes                                               | Yes                                               |
| Other Features     | H.265+, 3D DNR, BLC, HLC, iVMS-4200, HiLookVision | H.265+, 3D DNR, BLC, HLC, iVMS-4200, HiLookVision | H.265+, 3D DNR, BLC, HLC, iVMS-4200, HiLookVision |

16

17

PTZ-N4225I-DE

PTZ-N2C400M-DE

HiLook



| Price (Rials)      | ۲۶۵,۳۰۰,۰۰۰                                                    | ۷۵,۷۲۰,۹۶۵                                        |
|--------------------|----------------------------------------------------------------|---------------------------------------------------|
| Camera Type        | PTZ                                                            | PTZ                                               |
| Resolution         | 2 Megapixel                                                    | 4 Megapixel                                       |
| Lens               | 4.8-120mm Varifocal                                            | 2.8/4 mm Fixed                                    |
| Viewing Angle      | 57.6°-2.5°                                                     | 97°/79°                                           |
| IR Range           | Up to 100m IR                                                  | Up to 30m Color                                   |
| Standard           | IP66                                                           | IP66                                              |
| SD Card Support    | Yes (Up to 256 G)                                              | Yes                                               |
| WDR                | WDR (120 dB)                                                   | DWDR                                              |
| Microphone Support | No                                                             | No                                                |
| Other Features     | 25X Optical, H.265+, 3D DNR, BLC, HLC, iVMS-4200, HiLookVision | H.265+, 3D DNR, BLC, HLC, iVMS-4200, HiLookVision |

|             |             |             |             |             |
|-------------|-------------|-------------|-------------|-------------|
| 18          | 19          | 20          | 21          | 22          |
| NVR-104MH-D | NVR-108MH-C | NVR-108MH-D | NVR-116MH-C | NVR-216MH-C |

HiLook



|                      |                                                                     |                                                                     |                                                                     |                                                                                         |                                                                                         |
|----------------------|---------------------------------------------------------------------|---------------------------------------------------------------------|---------------------------------------------------------------------|-----------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------|
| Price (Rials)        | ۳۴,۴۰۰,۰۰۰                                                          | ۷۱,۰۰۰,۰۰۰                                                          | ۴۹,۵۰۰,۰۰۰                                                          | ۸۱,۰۰۰,۰۰۰                                                                              | ۱۰۸,۴۰۰,۰۰۰                                                                             |
| NVR Type             | 4-ch                                                                | 8-ch                                                                | 8-ch                                                                | 16-ch                                                                                   | 16-ch                                                                                   |
| Input BandWidth      | 40Mbps                                                              | 80Mbps                                                              | 60Mbps                                                              | 160Mbps                                                                                 | 160Mbps                                                                                 |
| Output Bandwidth     | 60Mbps                                                              | 80Mbps                                                              | 60Mbps                                                              | 80Mbps                                                                                  | 80Mbps                                                                                  |
| Resolution Support   | 6 MP                                                                | 8 MP                                                                | 6 MP                                                                | 8 MP                                                                                    | 8 MP                                                                                    |
| Video Output         | 1 Port HDMI : 2MP<br>1 Port VGA                                     | 1 Port HDMI : 4K<br>1 Port VGA : 2MP                                | 1 Port HDMI : 1080P<br>1 Port VGA : 1080P                           | 1 Port HDMI : 4K<br>1 Port VGA : 2MP                                                    | 1 Port HDMI : 4K<br>1 Port VGA : 2MP                                                    |
| POE Ports            | -                                                                   | -                                                                   | -                                                                   | -                                                                                       | -                                                                                       |
| Compression Standard | H.265+                                                              | H.265+                                                              | H.264+                                                              | H.265+                                                                                  | H.265+                                                                                  |
| SATA Interface       | 1 HDD up to 6TB                                                     | 1 HDD up to 8TB                                                     | 1 HDD up to 6TB                                                     | 1 HDD up to 8TB                                                                         | 2 HDD up to 8TB                                                                         |
| Other Features       | line crossing and intrusion detection, Smart search, Smart playback | line crossing and intrusion detection, Smart search, Smart playback | line crossing and intrusion detection, Smart search, Smart playback | Motion Detection, multiple VCA (line crossing, intrusion), Smart search, Smart playback | Motion Detection, multiple VCA (line crossing, intrusion), Smart search, Smart playback |